

ODU MEDI-SNAP[®]

HDMI   
ODU HIGH-SPEED DATA TRANSMISSION




ODU MEDI-SNAP®

FEATURES

- Lightweight
- Easy installation and maintenance
- Space-saving design
- High chemical resistance
- Fully sterilizable
- Quick mating with push-pull locking
- Easy-to-release break-away function
- Disposable solution available
- IEC 60601-1 compliant

APPLICATIONS

- Medical
- Industrial
- Digital test and measurement

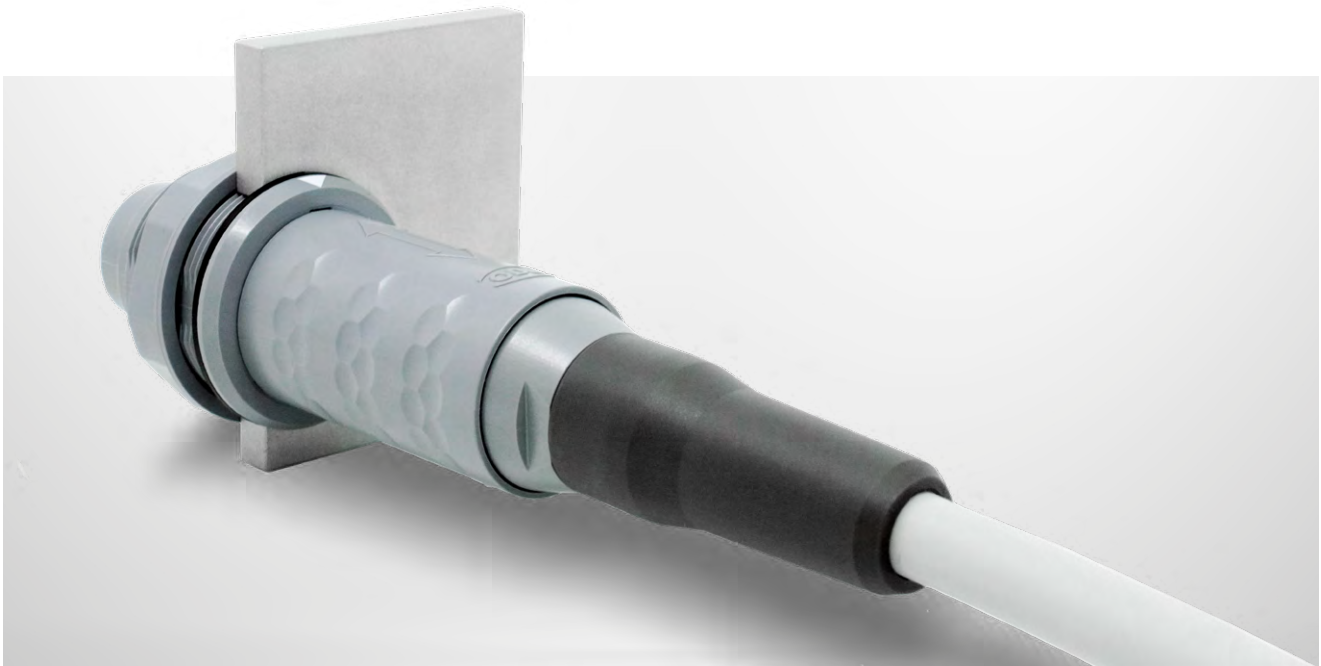

All shown connectors and cable assemblies are defined without breaking capacity (COC) according to IEC 61984:2008 [VDE 0627:2009-11].

Unless otherwise explicitly stated (for example: mains and high voltage), all shown connectors are rated to safety extra low voltage (SELV) of less than 50 V AC / 75 V DC, according to IEC 61140:2016 [VDE 0140-1:2016-11]. For more details, please refer to page [110](#).
ODU MEDI-SNAP® has UL recognition as described under file E110586.

Issue: 2025-12

All dimensions are in mm.

Some figures are for illustrative purposes only. Subject to change without notice. Errors and omissions excepted. We reserve the right to change our products and their technical specifications at any time in the interest of technical improvement. This publication supersedes all prior publications.

This publication is also available as a PDF file that can be downloaded from www.odu-connectors.com

TABLE OF CONTENTS

| | |
|------------------------------------------------------------------------------------------------------------|------------|
| PRODUCT INFORMATION | 5 |
| ODU MEDI-SNAP® at a glance | 6 |
| Support in complying with the legal requirements for medical devices | 7 |
| Push-pull locking functionality | 8 |
| Break-away functionality | 8 |
| Product features at a glance | 9 |
| Turned contacts | 9 |
| CONFIGURATION GUIDELINE | 13 |
| Your way to an individual connection: How to configure with the part number key | 15 |
| Connector configuration – step by step | 16 |
| Your way to an individual cable assembly solution: How to configure with the cable number key | 18 |
| Cable specifications | 19 |
| Silicone-overmolding | 20 |
| Cable assembly | 21 |
| ODU MEDI-SNAP® WITH PLASTIC / METAL HOUSING SIZE 1 | 23 |
| ODU MEDI-SNAP® Plastic / metal housing size 1 – Summary | 24 |
| Plug and cable assembly | 26 |
| In-line receptacle and cable assembly | 32 |
| Receptacle and cable assembly | 34 |
| Mechanical coding | 44 |
| Housing material and color coding | 45 |
| Contact insert and cable assembly | 46 |
| PCB layout | 52 |
| Cable collet system | 53 |
| Accessories | 54 |
| ODU MEDI-SNAP® WITH PLASTIC HOUSING SIZE 2 | 59 |
| ODU MEDI-SNAP® Plastic housing size 2 – Summary | 60 |
| Plug and cable assembly | 62 |
| Receptacle and cable assembly | 66 |
| Mechanical coding | 70 |
| Housing material and color coding | 71 |
| Contact insert and cable assembly | 72 |
| PCB layout | 76 |
| Cable collet system | 78 |
| Accessories | 79 |
| ODU MEDI-SNAP® WITH PLASTIC HOUSING SIZE 3.5 | 83 |
| ODU MEDI-SNAP® Plastic housing size 3.5 – Summary | 84 |
| Plug | 86 |
| Receptacle | 87 |
| Mechanical coding | 90 |
| Housing material and color coding | 91 |
| Contact insert | 92 |
| Cable collet system | 94 |
| Accessories | 95 |
| ODU DISPOSABLE SOLUTIONS | 99 |
| TOOLS | 103 |
| TECHNICAL INFORMATION | 109 |
| Explanations and information on safety requirement | 110 |
| Explanations and information on voltage ratings for low voltage inserts | 110 |
| Explanations and information on voltage ratings and safety requirements for mains and high voltage inserts | 111 |
| Housing materials / Surfaces / Insulator materials | 113 |
| Termination technologies | 114 |
| Conversions / AWG (American Wire Gauge) | 115 |
| Current load of turned contacts | 116 |
| IEC 60601-1:2005 (3rd edition) | 118 |
| Autoclaving of ODU MEDI-SNAP® | 121 |
| Technical terms | 122 |




ODU MEDI-SNAP®



PRODUCT INFORMATION

| | |
|-------------------------------------------------------------------------------------|-------------------|
| ODU MEDI-SNAP® at a glance | 6 |
| ODU supports you in complying with the legal requirements for medical devices | 7 |
| Push-pull locking functionality | 8 |
| Break-away locking functionality | 8 |
| Product features at a glance | 9 |
| Turned contacts | 9 |

ODU MEDI-SNAP® AT A GLANCE
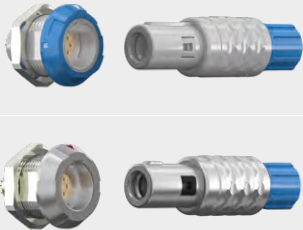
| ODU MEDI-SNAP® PLASTIC & METAL | | Coding | Size | No. of possible mechanical codings | Plug diameter in mm | Max. cable diameter in mm | Number of max. contacts | Solder | Crimp | PCB | IP protection degree IEC 60529:1989 in mated condition | IP protection degree IEC 60529:1989 in unmated condition | Housing material | From page |
|-------------------------------------------------------------------------------------|--|----------------|------|------------------------------------|---------------------|---------------------------|-------------------------|--------|-------|-----|--------------------------------------------------------|----------------------------------------------------------|------------------|--------------------|
|  | | Pin and groove | 1 | Plastic 6 | Plastic 13.7 | 6.5 | 14 | • | • | • | Up to IP67 | Up to IP68 | PSU PEI | 23 |
| | | | | Metal 3 | Metal 14.0 | | | | | | | | Brass | |
|  | | Pin and groove | 2 | Plastic 3 | Plastic 18.5 | 9.2 | 26 | • | | • | Up to IP64 | IP50 | PSU PEI | 59 |
|  | | Pin and groove | 3.5 | Plastic 3 | Plastic 23.0 | 10.5 | 41 | • | | • | Up to IP68 | Up to IP68 | PEI | 83 |

SUPPORT IN COMPLYING WITH THE LEGAL REQUIREMENTS FOR MEDICAL DEVICES




© WILAMED GmbH

- + Technical documentation
- + Risk management
- + Change management
- + Management of CMR substances
- + Continuous traceability
- + Retention period for technical documents
- + Supplier management




PUSH-PULL LOCKING FUNCTIONALITY

The proven push-pull locking ensures establishing connections easily in less than a second. It is **self-securing** – this means that an accidental release by pulling on the cable can be ruled out. During the mating process, the connector's locking claws will lock into place in the corresponding grooves in the receptacle and form a dependable connection between the connector and the receptacle. Consequently, when the connection is properly established, an unintentional demating of the connection by pulling on the cable cannot take place. The connection can only be released deliberately, by just pulling back the connector's outer sleeve.

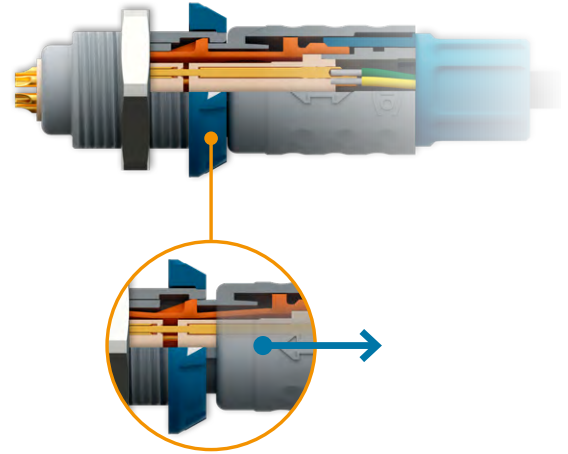

BREAK-AWAY FUNCTIONALITY

The efficient break-away locking allows an easy mating and demating of connections within fractions of a second just like the Push-Pull locking. But furthermore it also features an **emergency release** which enables demating the connection when needed by pulling on the cable. During mating, the connector's locking claws will lock into place in the corresponding grooves in the receptacle and form a dependable connection between the connector and the receptacle. The sloping shape of the locking claws ensures the “breaking away” of the connection when the connector or cable is pulled with a defined force.

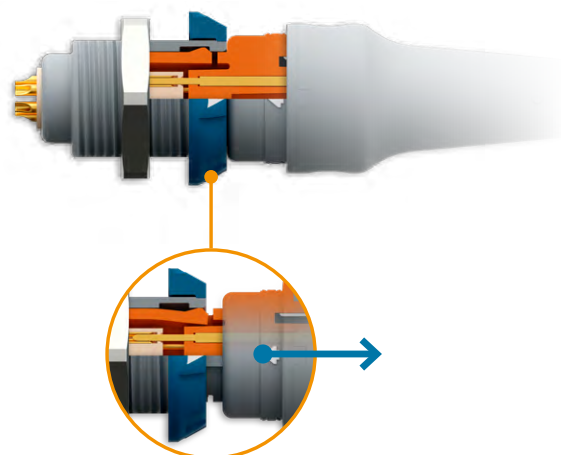

PRODUCT FEATURES AT A GLANCE

APPLICATIONS AND MATERIALS

The ODU MEDI-SNAP® housings are available in PSU, PEI and brass. Standard color for the housings is Gray or Black. Additional colors for the housings are available in PSU, upon request. Color codings are available with up to 8 different colors.

The flexibility of the ODU MEDI-SNAP® series allows adaptation to suit a wide range of requirements in medical and industrial applications as well as in the digital measurement and testing sector.

Under general application conditions, the temperature range of the ODU MEDI-SNAP® connectors is between $-50\text{ }^{\circ}\text{C}$ and a maximum of $+120\text{ }^{\circ}\text{C}$, even up to $+134\text{ }^{\circ}\text{C}$ in the case of auto-clavable connectors (see page 121). For cable assemblies, please also consider the temperature range of the cable and overmolding (see page 19).

IEC 60601-1:2005 (3RD EDITION)

Technical specification of connector only

The technical requirements stated in the IEC 60601-1:2005 refer almost exclusively to protection from electrical shock. In order to reduce the risk as much as possible for the patient as well as for the operator, the plastic version of ODU MEDI-SNAP® offers you maximum safety due to

- Up to 4 kV AC test voltage to conductive components and therefore two means of patient protection (2MOPP)¹
- Protection from electrical discharge (ESD) up to $\pm 15\text{ kV}$ (air discharge)
- Protection from electrical shock (socket inserts only) in unmated condition due to the design (test finger proof)

TURNED CONTACTS

Turned contacts are available in diameter 0.5 mm to 2 mm in the following termination types:

Solder, crimp and PCB

| | |
|---------------|------------|
| Mating cycles | min. 5.000 |
| Material | Brass |
| Plating | Gold |

STANDARD PIN AND SOCKET CONTACTS



Information on diameters, termination types and current carrying capacity can be found after in the section after the inserts.

¹ Working voltage of medical device max. 250V AC (degree of pollution 2)







ODU MED-SNAP®




CONFIGURATION GUIDELINE

Connector and cable assembly configuration – step by step

STEP BY STEP TO THE PERFECT CONNECTION

ODU offers high-quality connectors and comprehensive services for the complete assembly. From connectors to watertight potting, we provide the complete system from a single source.

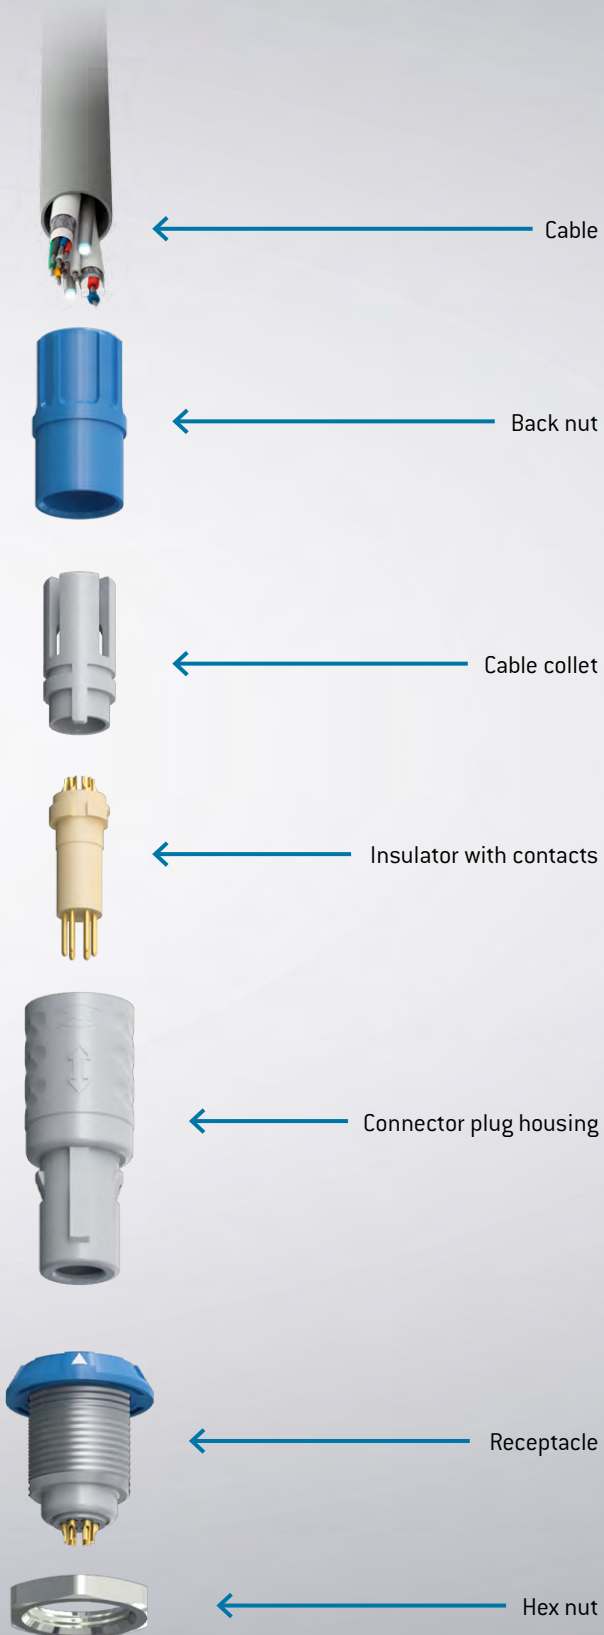

YOUR WAY TO AN INDIVIDUAL CONNECTION:

HOW TO CONFIGURE WITH THE PART NUMBER KEY.

This shows you how ODU's part number key is composed. In the first part of the configuration, select the connector plug housing (such as style and size) of the connector. In the middle part of the part number key, you configure the contact insert and then the cable entry.

Type

A = Break-away connector

G = Receptacle

K = In-line receptacle

S = Plug

W = Right-angled plug


Insulator material

P = PEEK (standard)

T = PBT

Ø = PSU

Cable collet system

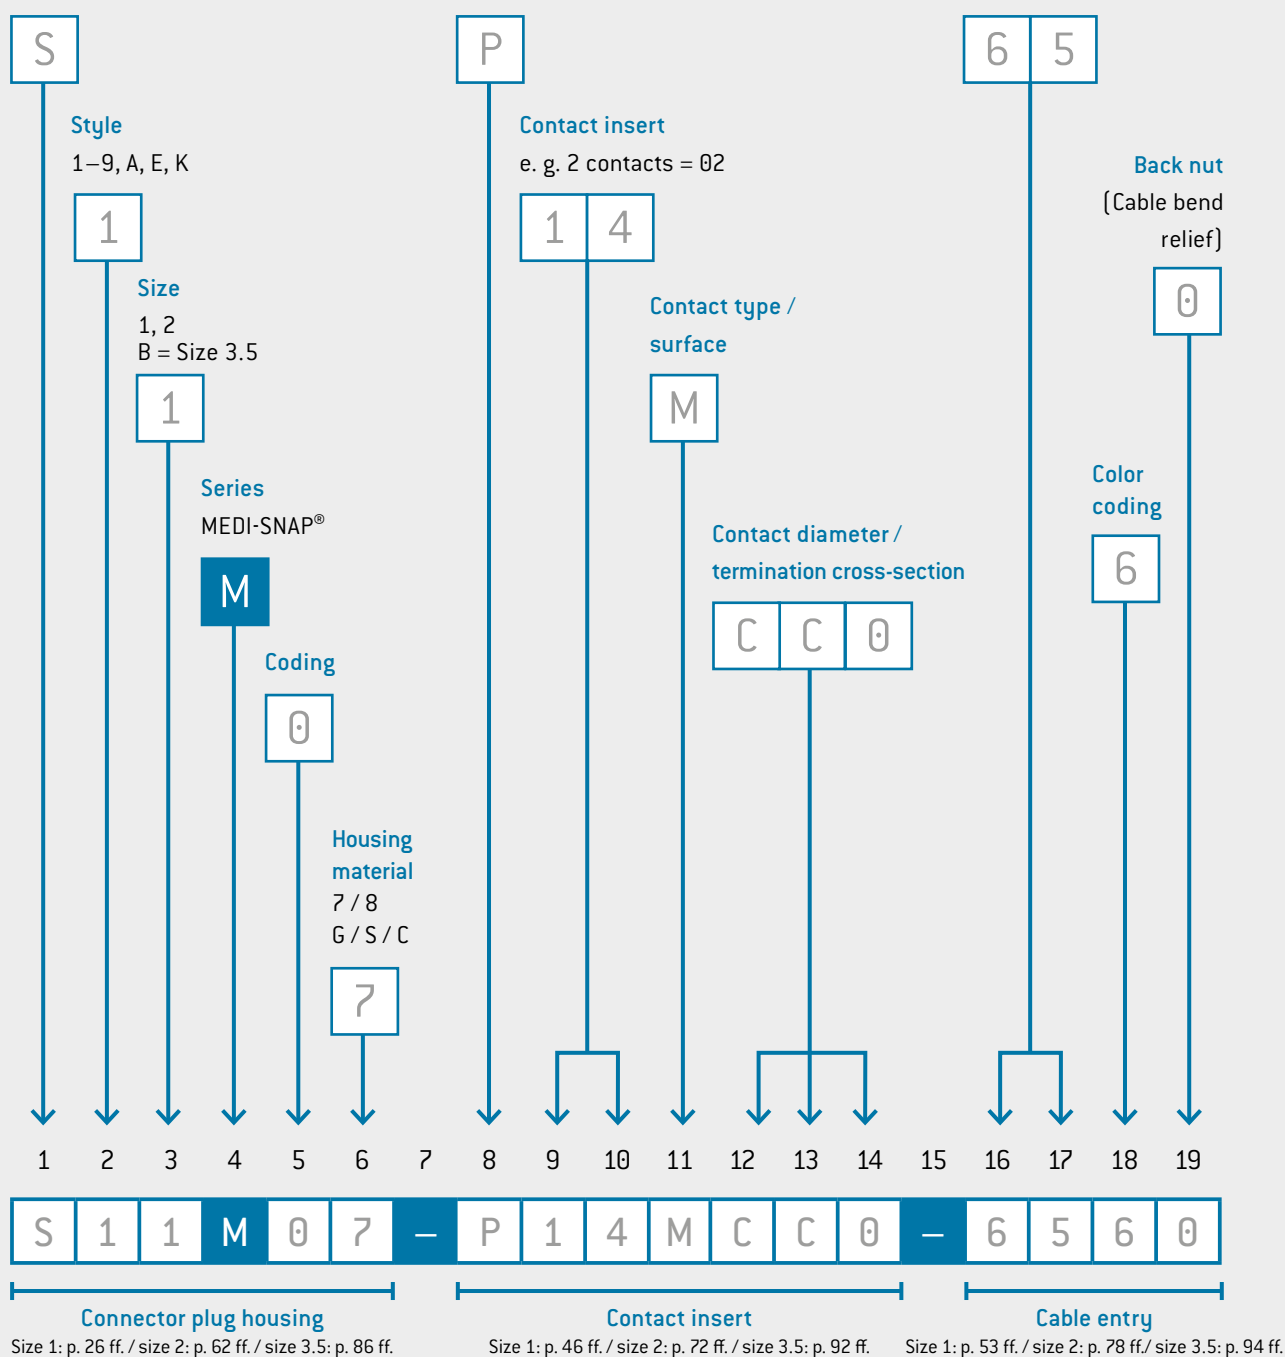

CONNECTOR CONFIGURATION – STEP BY STEP

The perfect product for you in just a few steps. These step-by-step instructions show how to configure your own individual product with the ODU part number key based on a sample configuration.



Connector in style 1 / size 1 / series ODU MEDI-SNAP® / coding 0° / connector plug housing plastic, Gray / insulator PEEK / 14 contacts / pin [solder] Au / termination cross-section AWG 28 / cable diameter 5.3–6.5 mm / standard back nut in the color Blue

1. STEP: SERIES (SEE POSITION 4)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| | | | M | | | – | | | | | | | | – | | | | |



2. STEP: STYLE (SEE POSITIONS 1, 2 AND 19)

SEE P. 26


| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | | M | | | – | | | | | | | | – | | | | 0 |



3. STEP: SIZE (SEE POSITION 3)

SEE P. 24


| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | | | – | | | | | | | | – | | | | 0 |



4. STEP: CODING (SEE POSITION 5)

SEE P. 44

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | | – | | | | | | | | – | | | | 0 |



5. STEP: HOUSING MATERIAL (SEE POSITION 6)

SEE P. 45

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | 7 | – | | | | | | | | – | | | | 0 |



6. STEP: INSULATOR MATERIAL (SEE POSITION 8)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | 7 | - | P | | | | | | | - | | | | 0 |



7. STEP: CONTACT INSERT (SEE POSITIONS 9 AND 10)

SEE P. 46

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | 7 | - | P | 1 | 4 | | | | | - | | | | 0 |




8. STEP: CONTACT TYPE / SURFACE (SEE POSITION 11)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | 7 | - | P | 1 | 4 | M | | | | - | | | | 0 |




9. STEP: CONTACT DIAMETER (SEE POSITION 12)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | 7 | - | P | 1 | 4 | M | C | | | - | | | | 0 |




10. STEP: TERMINATION CROSS-SECTION (SEE POSITIONS 13 AND 14)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | 7 | - | P | 1 | 4 | M | C | C | 0 | - | | | | 0 |



11. STEP: CABLE COLLET SYSTEM (SEE POSITIONS 16 AND 17)


| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | 7 | - | P | 1 | 4 | M | C | C | 0 | - | 6 | 5 | | 0 |



12. STEP: COLOR STANDARD BACK NUT (SEE POSITION 18)

SEE P. 45

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| S | 1 | 1 | M | 0 | 7 | - | P | 1 | 4 | M | C | C | 0 | - | 6 | 5 | 6 | 0 |



YOUR WAY TO AN INDIVIDUAL CABLE ASSEMBLY SOLUTION


HOW TO CONFIGURE WITH THE CABLE NUMBER KEY

This shows you how ODU's cable number key is composed. In the first part of the configuration – after the "C" for cable, please insert the first 6 positions of your connector number key.

In the middle part of the cable number key, you configure the bend relief, color and count number.

The last 6 positions determine the length of the cable in mm.

Cable assembly

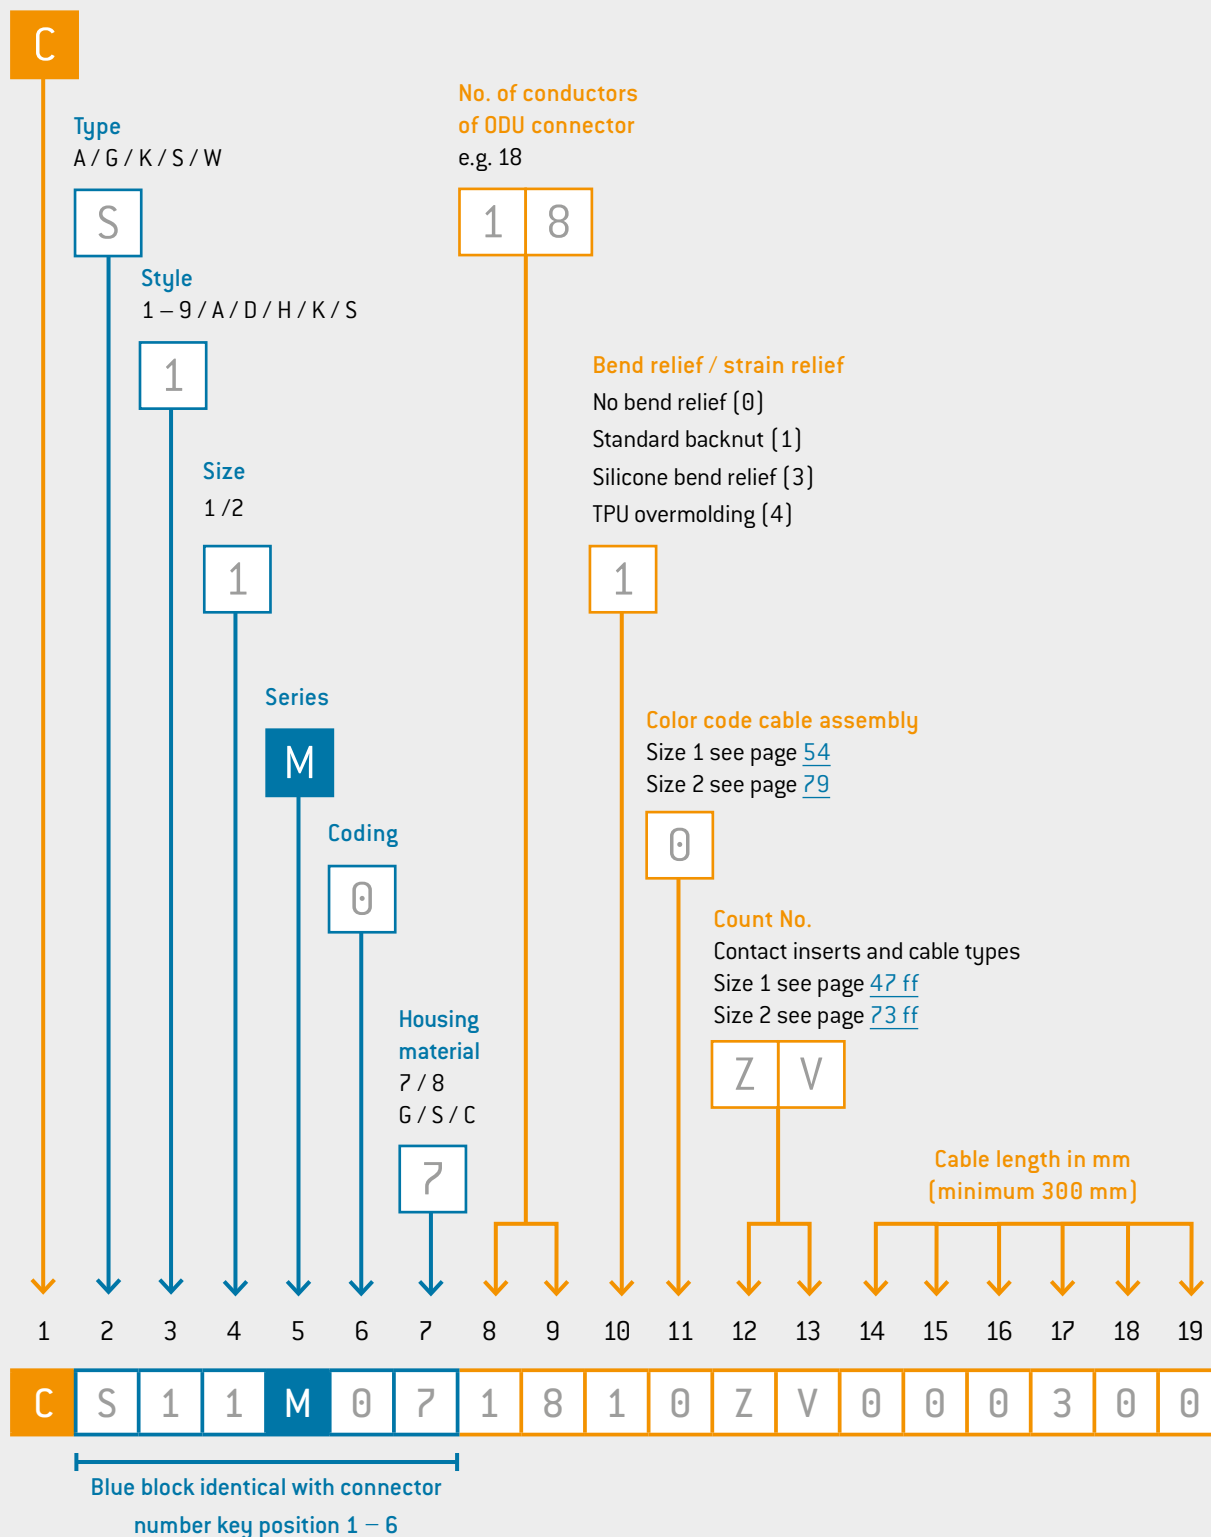

CABLE SPECIFICATIONS


TECHNICAL DATA



SINGLE WIRE PVC

UL-STYLE 1061 / 10002 | UL-STYLE 1007 / 1569 | UL-STYLE 1015

| | |
|-------------------|----------------------------------------------------------------------------------------------------------|
| Conductor | TPC – tin plated copper acc. to EN 13602:2013 |
| Insulation | UL-PVC semi-rigid (UL-Style 1061 / 10002) UL-PVC 105 °C (UL-Style 1007 / 1569 & 1015) |
| Temperature range | –10 up to +105 °C |
| Test voltage | 1,500 V RMS (UL-Style 1061 / 10002) 2,000 V RMS (UL-Style 1007 / 1569) 6,000 V RMS (UL-Style 1015) |
| Operating voltage | 300 V RMS (UL-Style 1061 / 10002 & 1007 / 1569) 600 V RMS (UL-Style 1015) |

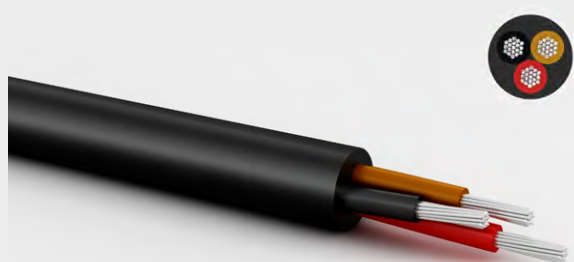

MULTI-CONDUCTOR CABLES PVC BLACK – UNSCREENED

UL / cUL – LIYY STYLE 2464 / 2517-10002

| | |
|----------------------|----------------------------------------------------|
| Conductor | TPC – tin plated copper acc. to EN 13602:2013 |
| Insulation | UL-PVC semi-rigid (core) UL-PVC 105 °C (jacket) |
| Temperature range | –10 up to +80 °C (style 2464) |
| Test voltage | 1,500 V RMS |
| Operating voltage UL | 300 V RMS |



MULTI-CONDUCTOR CABLES PVC WHITE – UNSCREENED

UL-STYLE 2464

| | |
|----------------------|-------------------------|
| Conductor | TPC – tin plated copper |
| Insulation | SR-PVC |
| Temperature range | –10 up to +80 °C |
| Test voltage | 1,500 V RMS |
| Operating voltage UL | 300 V RMS |



COAXIAL CABLES PVC BLACK

WITHOUT UL APPROVAL

| | |
|-------------------|-------------------------|
| Conductor | STAKU – conductor blank |
| Insulation | PVC |
| RG Type | RG 174 |
| Impedance | 50 Ohm |
| Shielding | Copper braid shield |
| Temperature range | –10 up to +80 °C |

OVERMOLDING SPECIFICATIONS

TECHNICAL DATA



OVERMOLDING

| | |
|-----------------------|------------------|
| Material | TPU |
| Color | Black, Gray |
| Operating temperature | –40 up to +85 °C |

SILICONE-OVERMOLDING

- + New surface with unique haptics – no stick-slip effect
- + Up to 500 autoclave cycles
- + Bend protection thanks to special shape of overmolding
- + Approved LSR and HTV processes available
- + Maximum alternating bending strength
- + Halogen- and latex-free




PREVENTION OF THE
STICK-SLIP EFFECT



AUTOCLAVABILITY




BEND PROTECTION AND
SMOOTHLY TRANSITIONING
OVERMOLDING

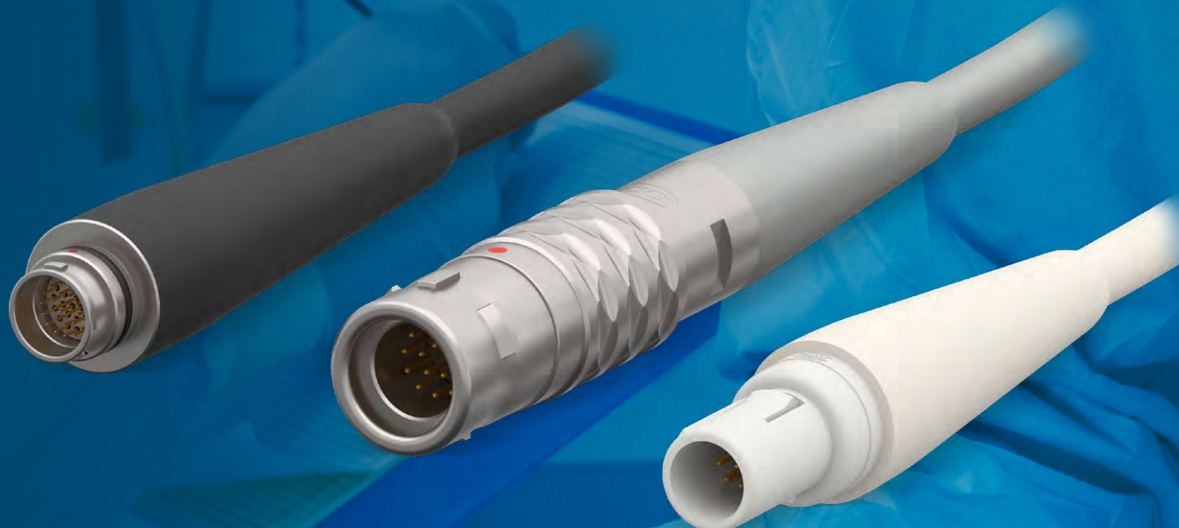

CABLE ASSEMBLY

- 
- + One point of contact for a complete system
 - + High technical expertise in the processing of third-party products
 - + 100 % final inspection
 - + Custom labeling and cable printing
 - + Close collaboration with leading cable manufacturers
 - + Process-controlled solder and crimp monitoring from initial samples to full production
 - + Cleanroom production possible in accordance with ISO 14644-1:2015-12
 - + Production in accordance with UL possible (File: E333666)
 - + Inhouse Technology Test Center for the development of technologies for customer-specific requirements
 - + Production based on IPC standards
- 

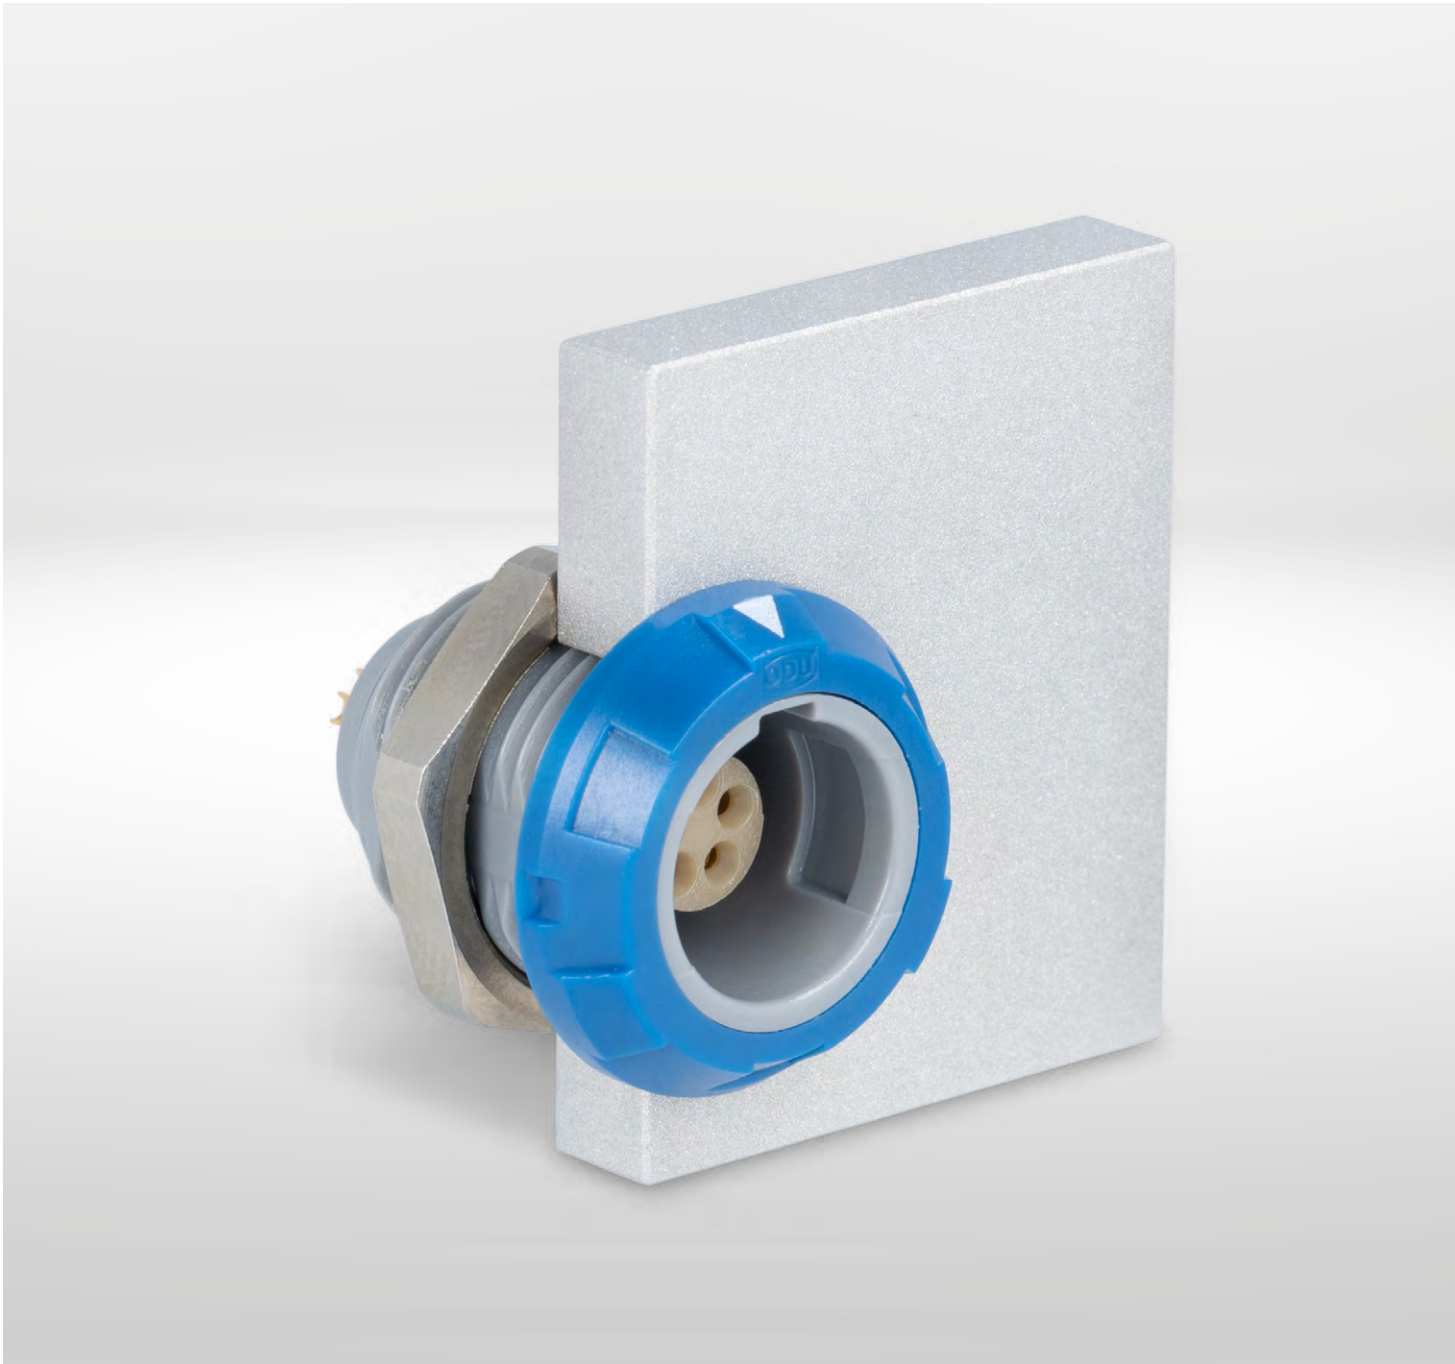

ODU MEDI-SNAP®



ODU MEDI-SNAP® WITH PLASTIC / METAL HOUSINGS SIZE 1

| | |
|---------------------------------------------------------------|--------------------|
| ODU MEDI-SNAP® Plastic / metal housing size 1 – Summary | 24 |
| Plug and cable assembly | 26 |
| In-line receptacle and cable assembly | 32 |
| Receptacle and cable assembly | 34 |
| Mechanical coding | 44 |
| Housing material and color coding | 45 |
| Contact insert and cable assembly | 46 |
| PCB layout | 52 |
| Cable collet system | 53 |
| Accessories | 54 |

ODU MEDI-SNAP® PLASTIC / METAL HOUSING SIZE 1 – SUMMARY

The ODU MEDI-SNAP® with plastic housing in size 1 is coded by pin and groove. These circular connectors can have a variety of configurations: numerous styles of connectors, receptacles and in-line receptacles as well as various termination types, contact inserts and color codings.

- Coding over pin and groove
- 8 color codings
- 6 mechanical codings
- 2–14 contacts
- 3 termination types
- Contacts for solder, crimp and PCB termination
- A selection of numerous connectors as well as receptacles and in-line receptacles
- IP50 / IP64 and IP67 available in mated condition
- Up to 5,000 mating cycles

BREAK-AWAY PLUG

P. 30

5,000
mating cycles

IP67

PL



A

5

PL Plastic
 MT Metal


STRAIGHT PLUG – PUSH-PULL

P. 26

2,000
mating cycles

IP50


PL



S

1

MT




S

1

IP50


PL



S

2

MT




S

2

IP64


PL



S

4

MT



S

4

RIGHT-ANGLED PLUG – PUSH-PULL

P. 28

2,000
mating cycles

IP50

PL



W

1

PL



W

2

For assembly instructions, please refer to our website: www.odu-connectors.com/downloads/assembly-instructions

IN-LINE RECEPTACLE

P. 32

5,000 mating cycles

IEC 60601-1: 2 M00P¹ and 1 M0PP¹ (Plastic only)

IP50

PL



K

1

MT



K

5

on request

PL



K

2

MT



K

6

on request

RECEPTACLE


P. 34

5,000 mating cycles

IEC 60601-1: 2 M00P¹ and 1 M0PP¹ (Plastic only)

IP50


PL



G

1


MT



G

1


PL



G

5


MT



G

5

PL




G

6

on request


PL



G

8

MT



G

K

RECEPTACLE

P. 40

5,000 mating cycles

IEC 60601-1: 2 M00P¹ and 2 M0PP¹ (Plastic only)

IP64
IP67

PL



G

4

IP50

PL



G

9

IP64
IP67
IP68²

PL



G

A

IP67
IP68²

MT




G

A

¹As per IEC 60601-1:2012 (VDE 0750-1:2013-12).
Max working voltage of the medical device 250 V AC
(degree of pollution 2).
Valid for plastic receptacles in combination with plastic plugs only.
All cable assemblies with plastic connectors in the catalog fulfill
1M00P/1M0PP.
To ensure the required clearance and creepage distance in the termina-
tion area of plug style A5, a corresponding potting sleeve must be used
(not included in the scope of delivery).
²IP68 in unmated condition with respect to the device

25

CABLE ASSEMBLY – STRAIGHT PLUG

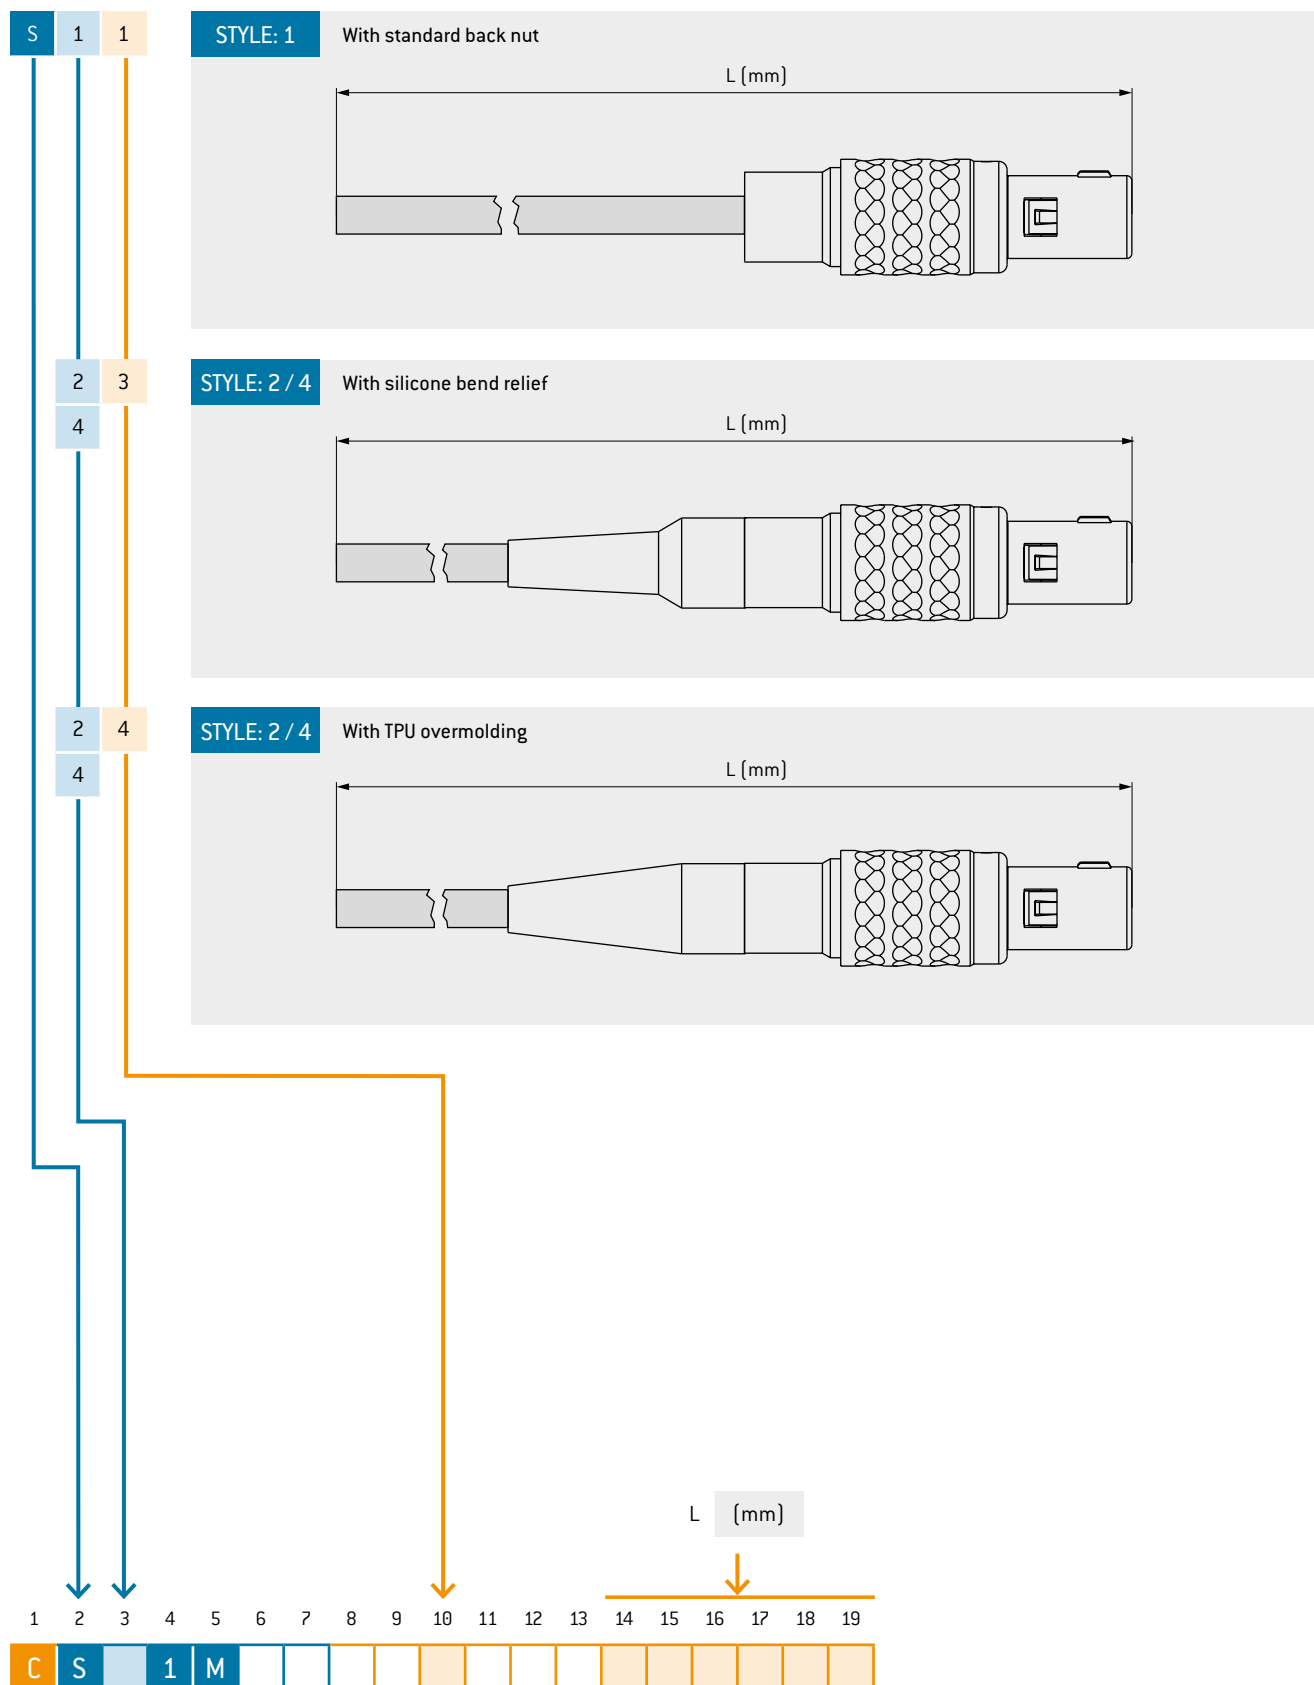

RIGHT-ANGLED PLUG

Push-pull styles

W

1


0

2


S

STYLE: 1

With standard back nut




PL

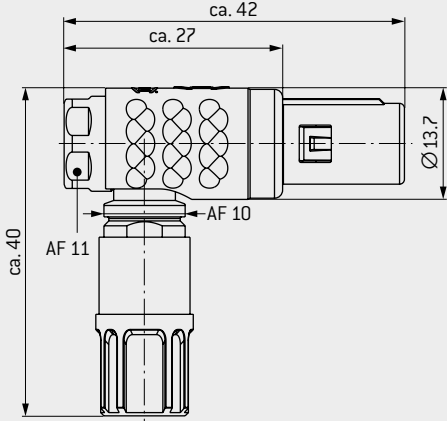


IP50

STYLE: 2

With back nut¹ for cable bend relief²



PL

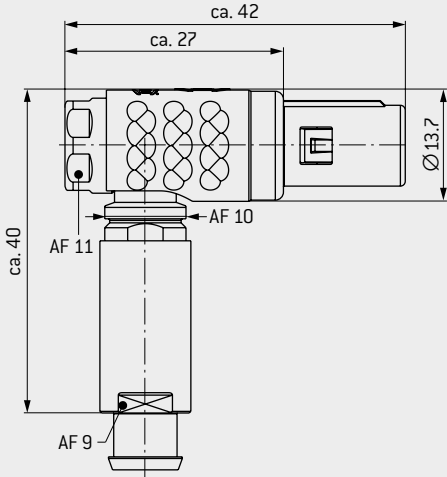

IP50

TECHNICAL DATA

- Contact configuration see page 46 ff.
- Mechanical and color coding see page 44 ff.
- Cable collet diameter see page 53.
- Housing material and color see page 45.
- Accessories see page 54 ff.
- IP rate in mated condition and depending on the mating receptacle

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

W

1

M

-

P

¹ Back nuts for cable bend reliefs have to be ordered in the same color as the connector housing. The color coding is based on the cable bend relief. ² Cable bend reliefs have to be ordered separately (see page 54).

STYLE: 1 With standard back nut

L (mm)

STYLE: 2 With silicone bend relief

L (mm)

L (mm)

| Cable Length (mm) | Color |
|-------------------|------------|
| 1 | Orange |
| 2 | Blue |
| 3 | Light Blue |
| 4 | Dark Blue |
| 5 | Orange |
| 6 | Orange |
| 7 | Orange |
| 8 | Orange |
| 9 | Orange |
| 10 | Orange |
| 11 | Orange |
| 12 | Orange |
| 13 | Orange |
| 14 | Orange |
| 15 | Orange |
| 16 | Orange |
| 17 | Orange |
| 18 | Orange |
| 19 | Orange |

BREAK-AWAY PLUG


Break-away styles


A

5

STYLE: 5

Suitable for overmolding (without cable outlet)

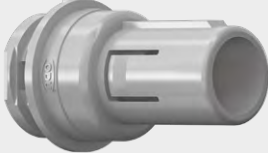

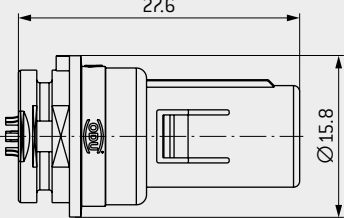

PL

IP67

TECHNICAL DATA

- Contact configuration see page 46 ff.
- Mechanical and color coding see page 44 ff.
- Housing material and color see page 45.
- Accessories see page 54 ff.
- IP rate in mated condition and depending on the mating receptacle
- Housing and insulator moulded in one piece
- Not mateable with metal receptacles

1

2

3

4

5

6

7

8¹

9

10

11

12

13

14

15

16

17

18

19

A

5

1

M

-

0

-

0


0

0

0

¹ In the case of this style, the connector housing as well as the insulator are made of the housing material PSU.

CABLE ASSEMBLY – BREAK-AWAY PLUG

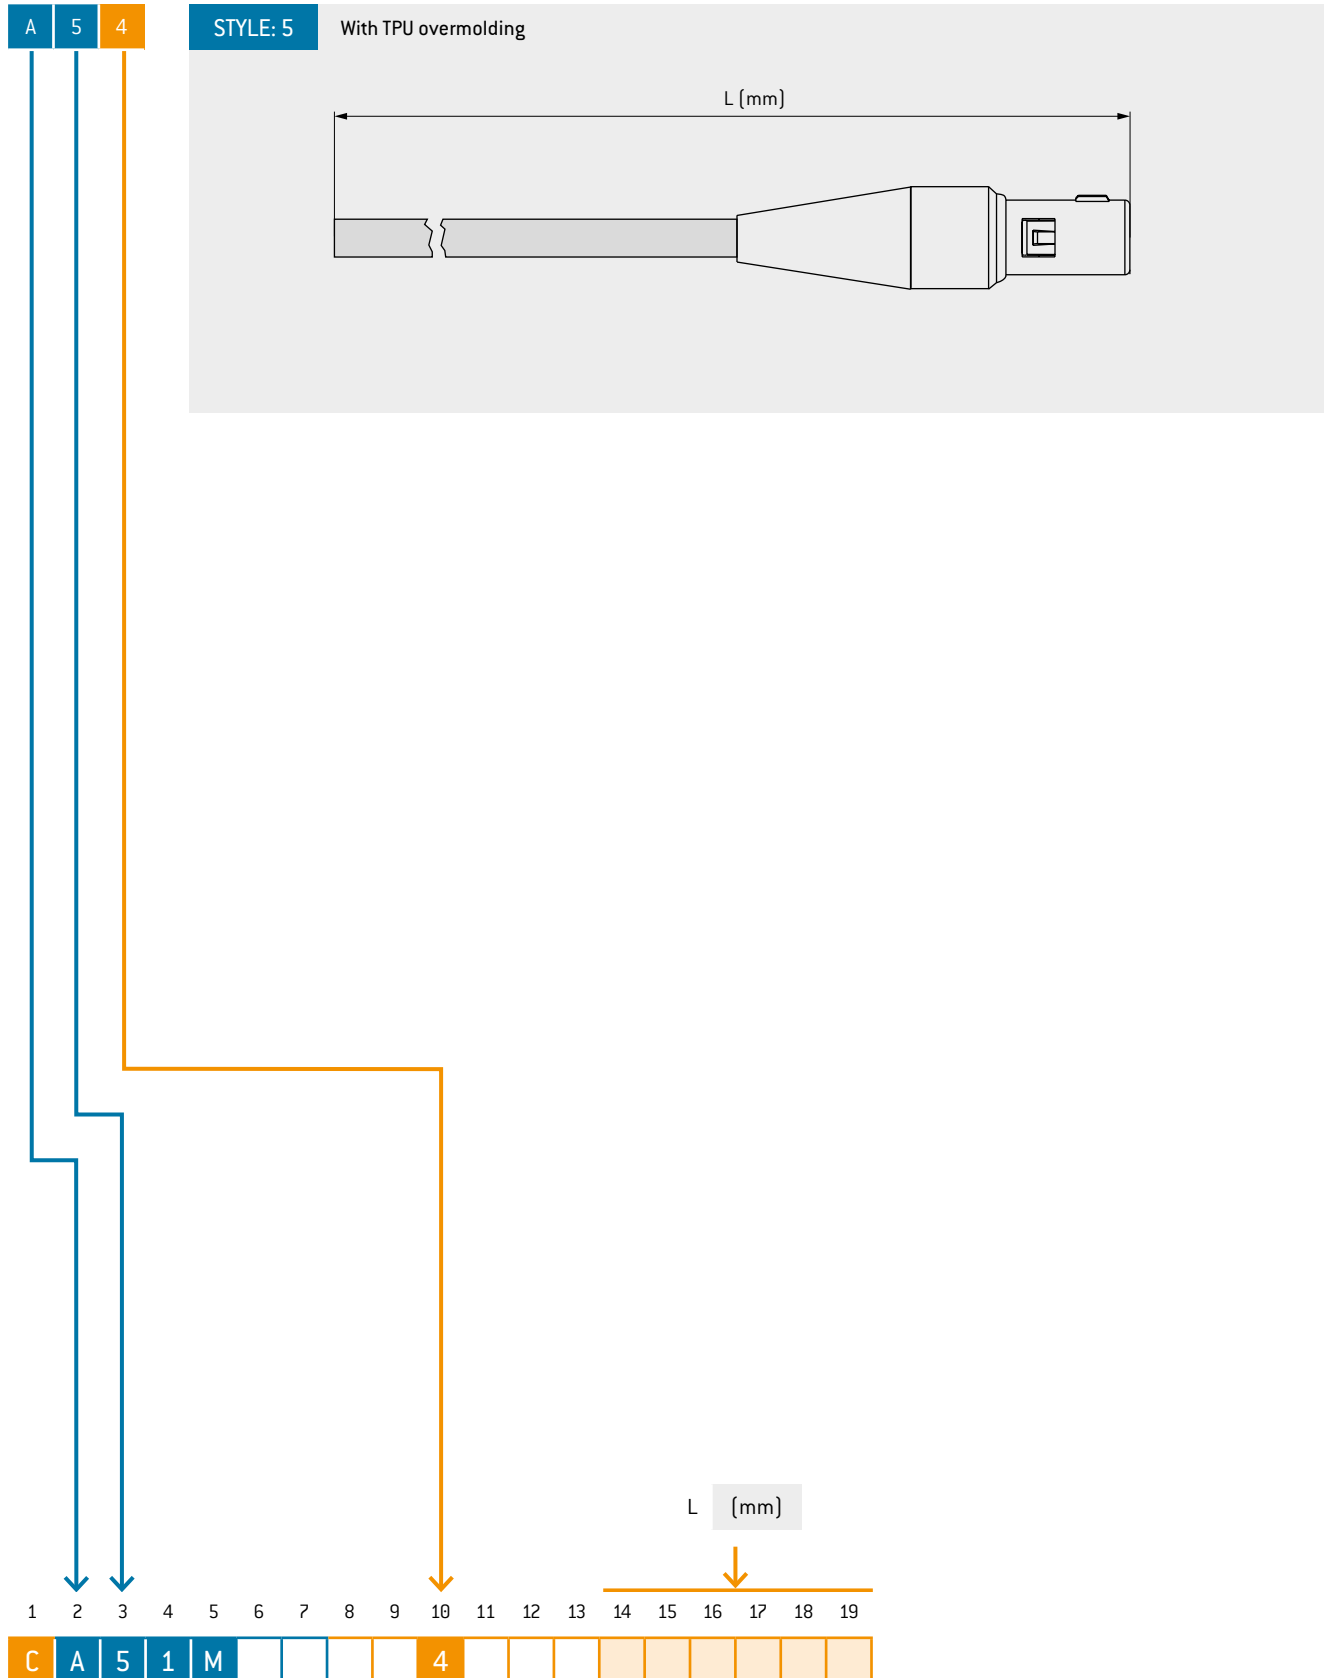

IN-LINE RECEPTACLE

Suitable for creating a cable to cable connection

K

1

0

5

0

2


S

6


S

STYLE: 1

With standard back nut



PL

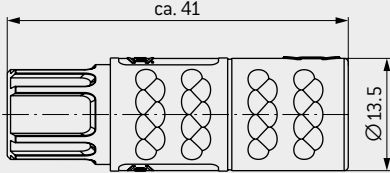

ca. 41


Ø 13.5

IP50


STYLE: 5

ON REQUEST

With standard back nut

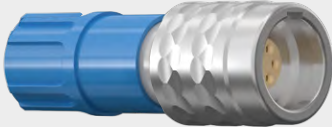

MT

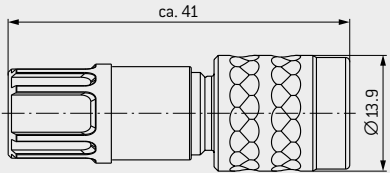


ca. 41

Ø 13.9


IP50

STYLE: 2

With back nut¹ for cable bend relief²



PL

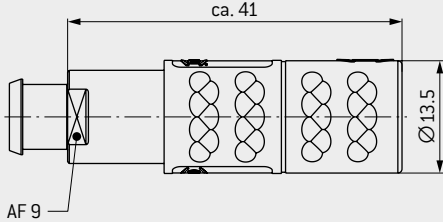

ca. 41

Ø 13.5


AF 9

IP50


STYLE: 6

ON REQUEST

With back nut¹ for cable bend relief²

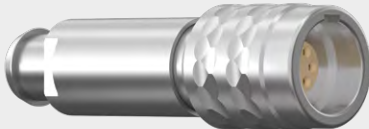

MT

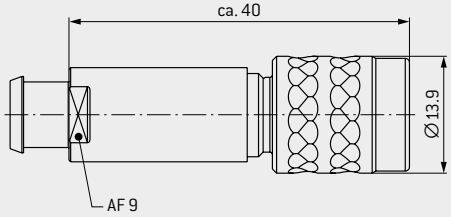

ca. 40

Ø 13.9

AF 9

IP50

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

K

1

M

-

P

TECHNICAL DATA

- Contact configuration see page 46 ff.
- Mechanical and color coding see page 44 ff.
- Cable collet diameter see page 53.
- Housing material and color see page 45.
- Accessories see page 54 ff.
- IP rate in mated condition

¹ Back nuts for cable bend reliefs have to be ordered in the same color as the connector housing. The color coding is based on the cable bend relief. ² Cable bend reliefs have to be ordered separately (see page 54).

32

The diagram illustrates three different styles of cable assemblies, each with a specific part number and a set of dimensions. The dimensions are represented by arrows and labels, and the part numbers are shown in a grid at the bottom.

STYLE: 1 / 5 With standard back nut

Dimensions: L (mm)

STYLE: 2 / 6 With silicone bend relief

Dimensions: L (mm)

STYLE: 2 / 6 With TPU overmolding

Dimensions: L (mm)

The part numbers are listed in a grid at the bottom, with columns labeled C, K, 1, M, and a series of empty boxes. The part numbers are: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19.

RECEPTACLE


G 6

STYLE: 6


ON REQUEST

IP50


With strain relief, suitable for front and rear installation



PL

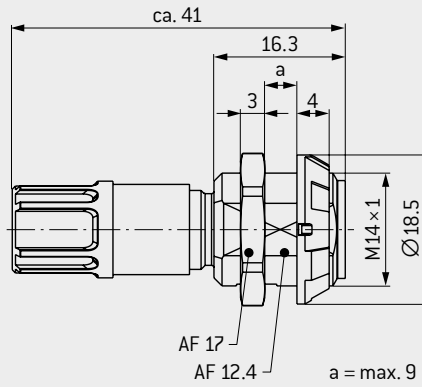

PANEL CUT-OUT



AF : 12.5 mm
Ø : 14.1 mm


TECHNICAL DATA

- Contact configuration see page 46 ff.
- Mechanical and color coding see page 44 ff.
- Cable collet diameter see page 53.
- Housing material and color see page 45.
- IP50 in mated condition
- IP50 with respect to the end device

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

G 6 1 M - P - 0

CABLE ASSEMBLY – RECEPTACLE

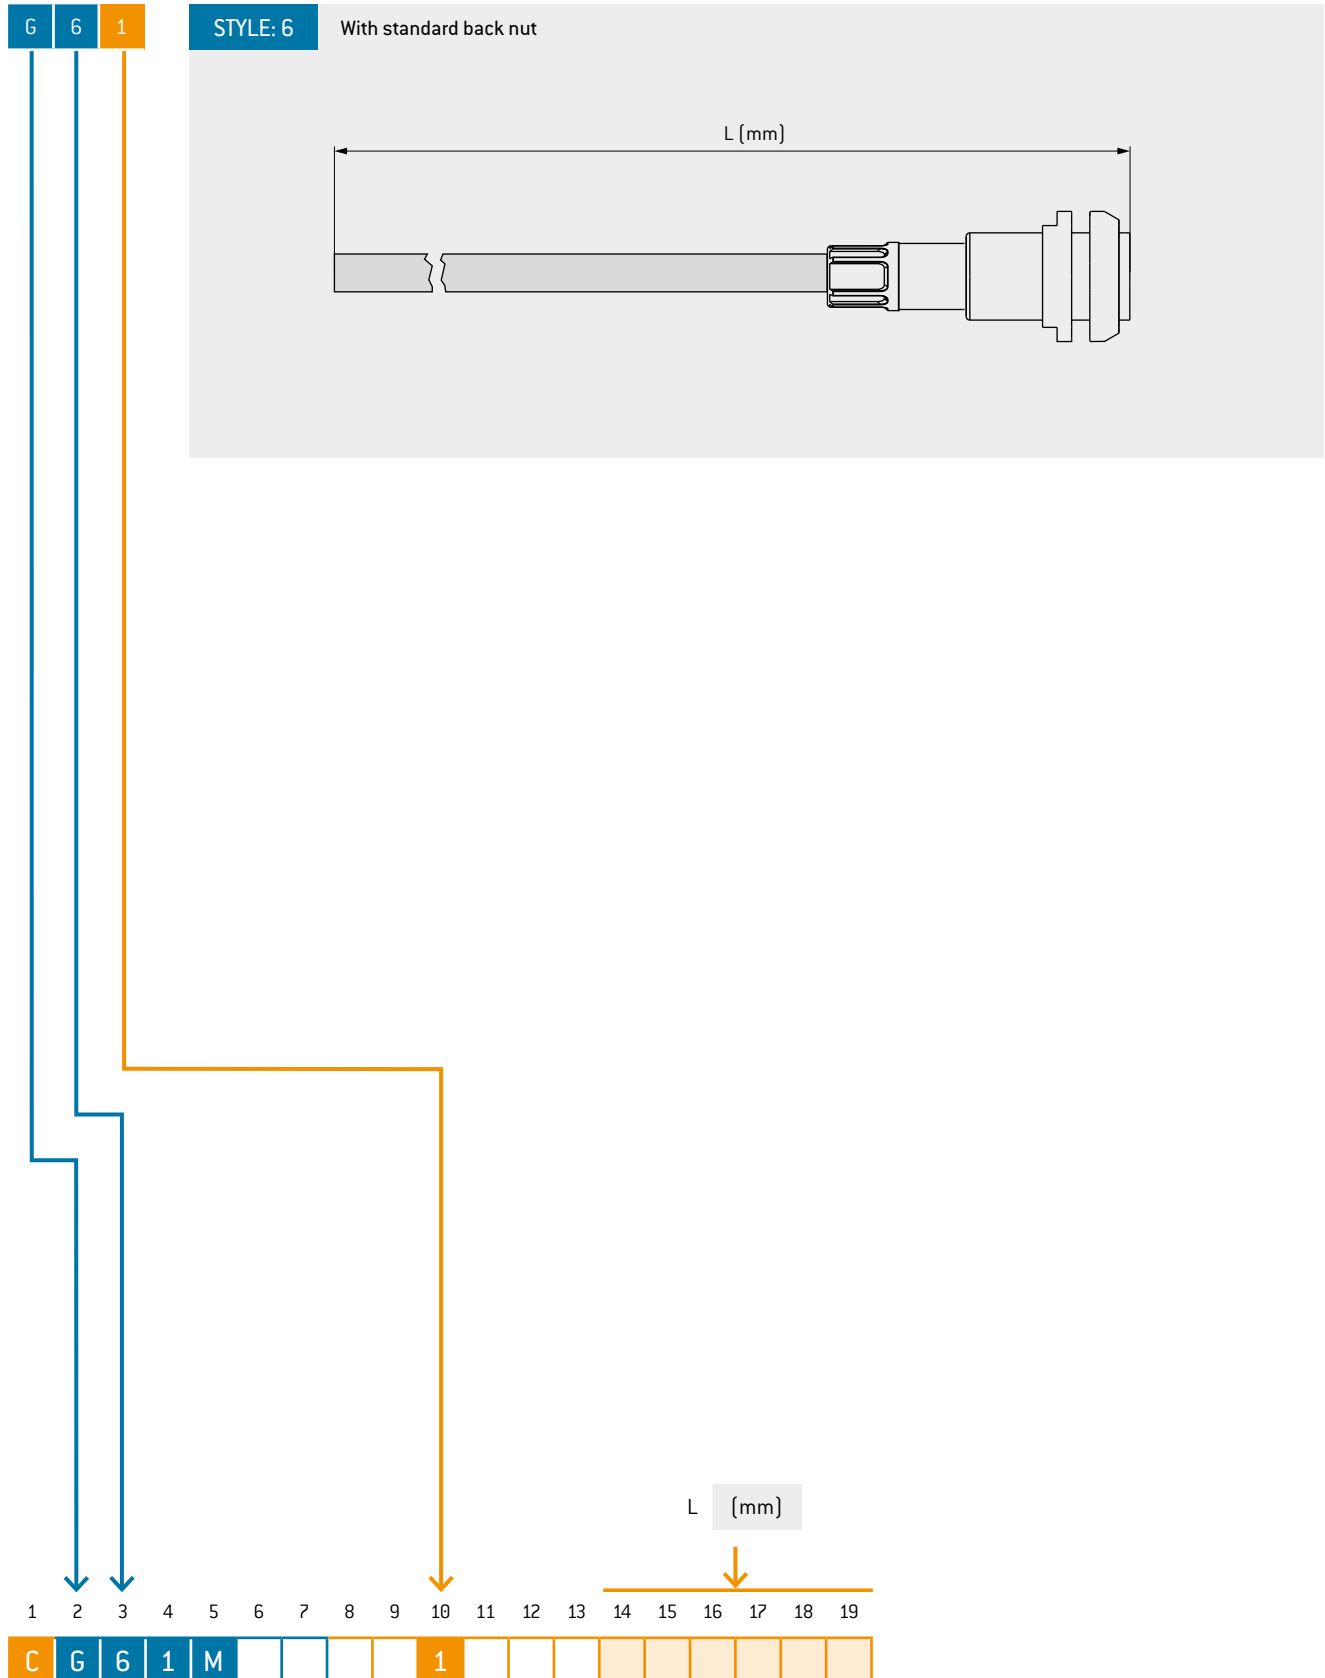

RECEPTACLE


G

1


STYLE: 1

IP50


For front panel installation




PL



MT

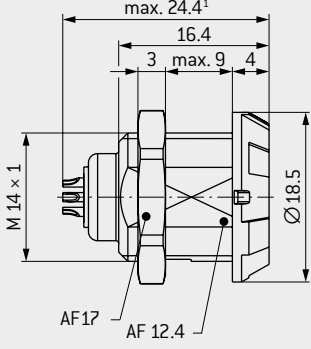

PANEL CUT-OUT




AF : 12.5 mm
Ø : 14.1 mm

5


STYLE: 5

IP50


Receptacle with continuous thread, can be installed from front or rear; extension in front of panel is adjustable




PL



MT

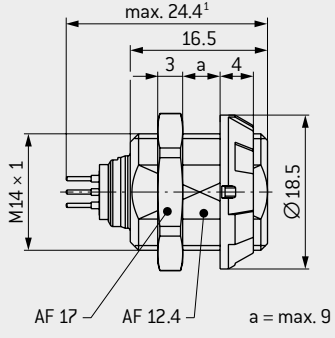

PANEL CUT-OUT



AF : 12.5 mm
Ø : 14.1 mm

TECHNICAL DATA


- Contact configuration see page 46 ff.
- PCB layouts see page 52.
- Mechanical and color coding see page 44 ff.
- Housing material and color see page 45.
- No color coding for metal receptacle style G1 possible
- IP50 in mated condition
- IP50 with respect to the end device

↓ Metal version style 1, default "C"

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| G | 1 | M | | | | | | | | | | | | | | | 0 | 0 |

¹ Depending on the insert

CABLE ASSEMBLY – RECEPTACLE

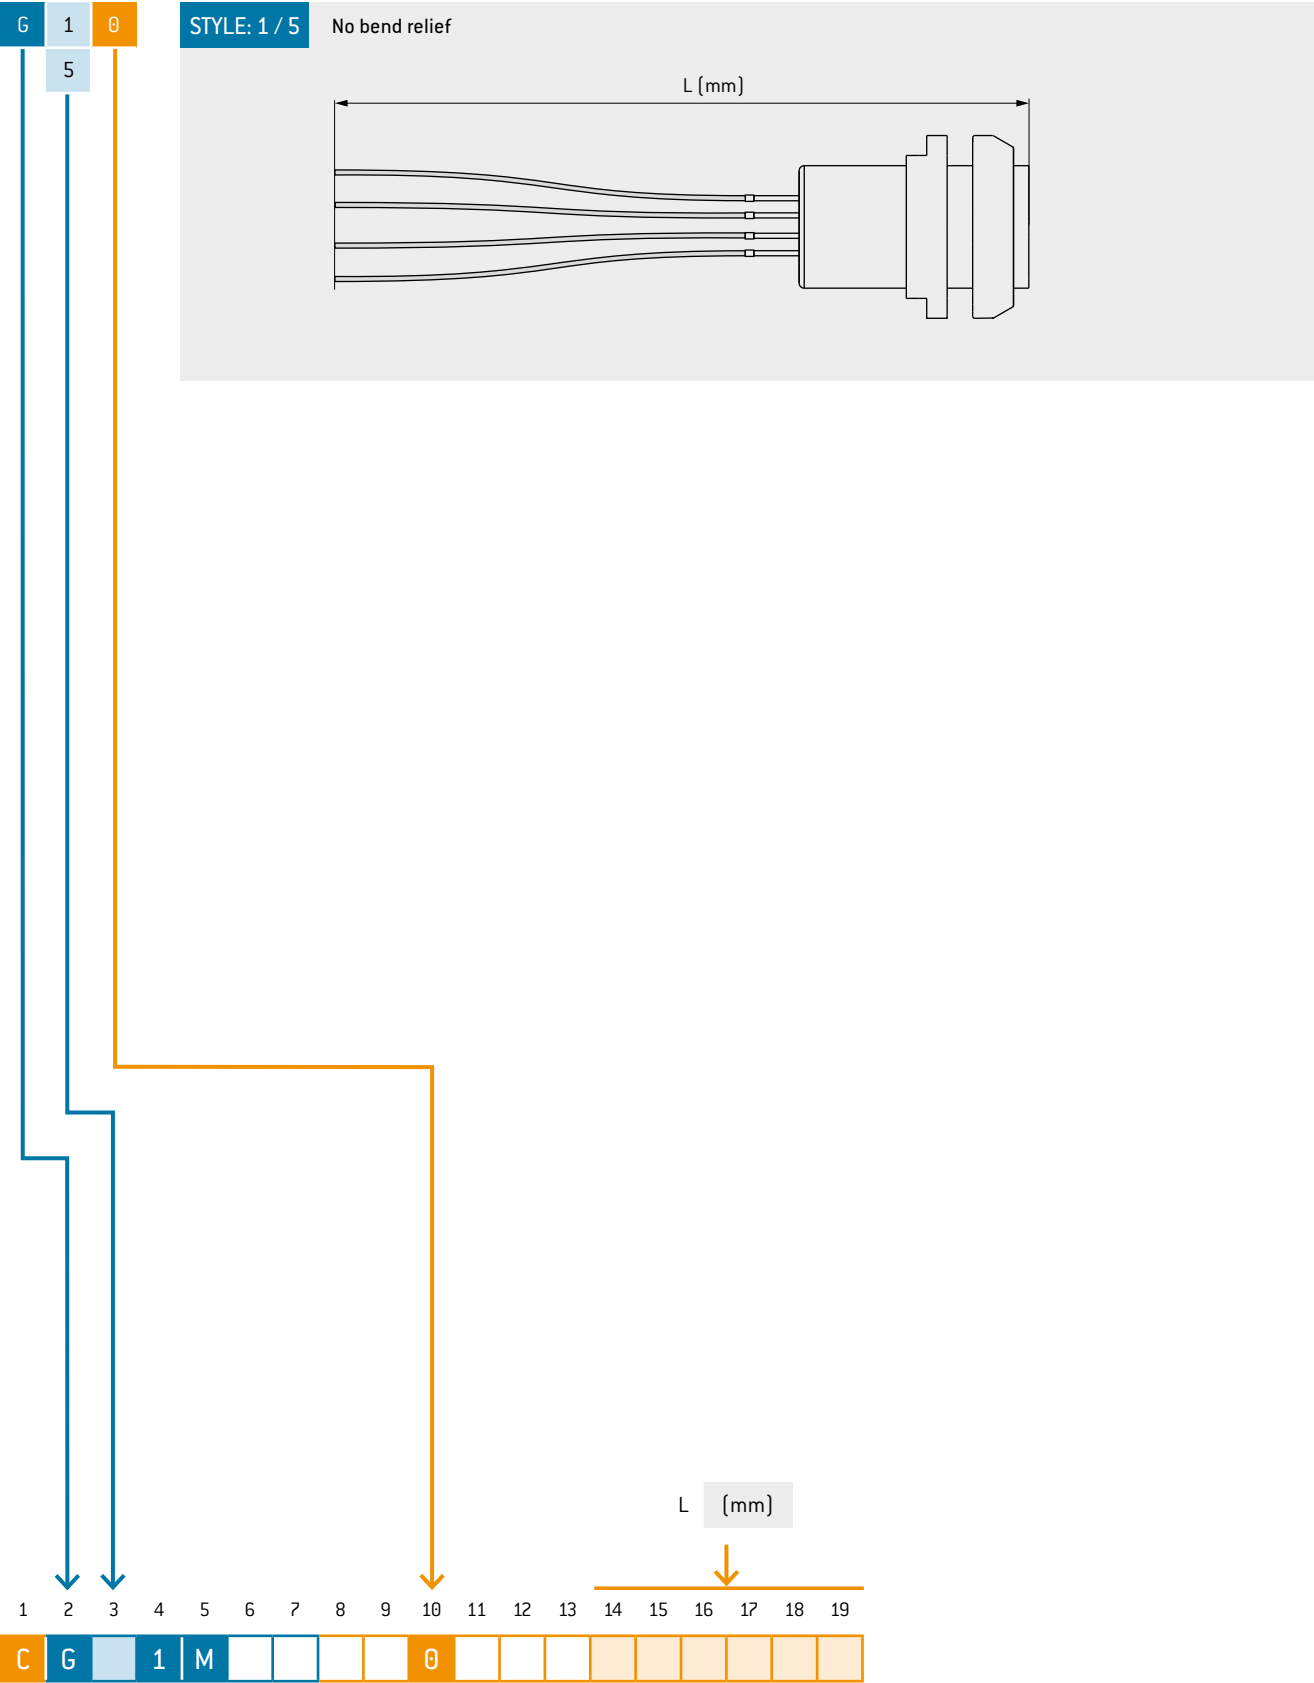


RECEPTACLE

G 8


STYLE: 8

For rear panel installation


IP50



PL



PANEL CUT-OUT




AF : 12.5 mm
Ø : 14.1 mm

K


STYLE: K

For rear panel installation


IP50



MT



PANEL CUT-OUT



AF : 12.5 mm
Ø : 14.1 mm


TECHNICAL DATA

- Contact configuration see page 46 ff.
- PCB layouts see page 52.
- Mechanical and color coding see page 44 ff.
- Housing material and color see page 45.
- IP50 in mated condition
- IP50 with respect to the end device

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| G | 1 | M | | | | | P | | | | | | | | | | | 0 |

¹ Depending on the insert

CABLE ASSEMBLY – RECEPTACLE

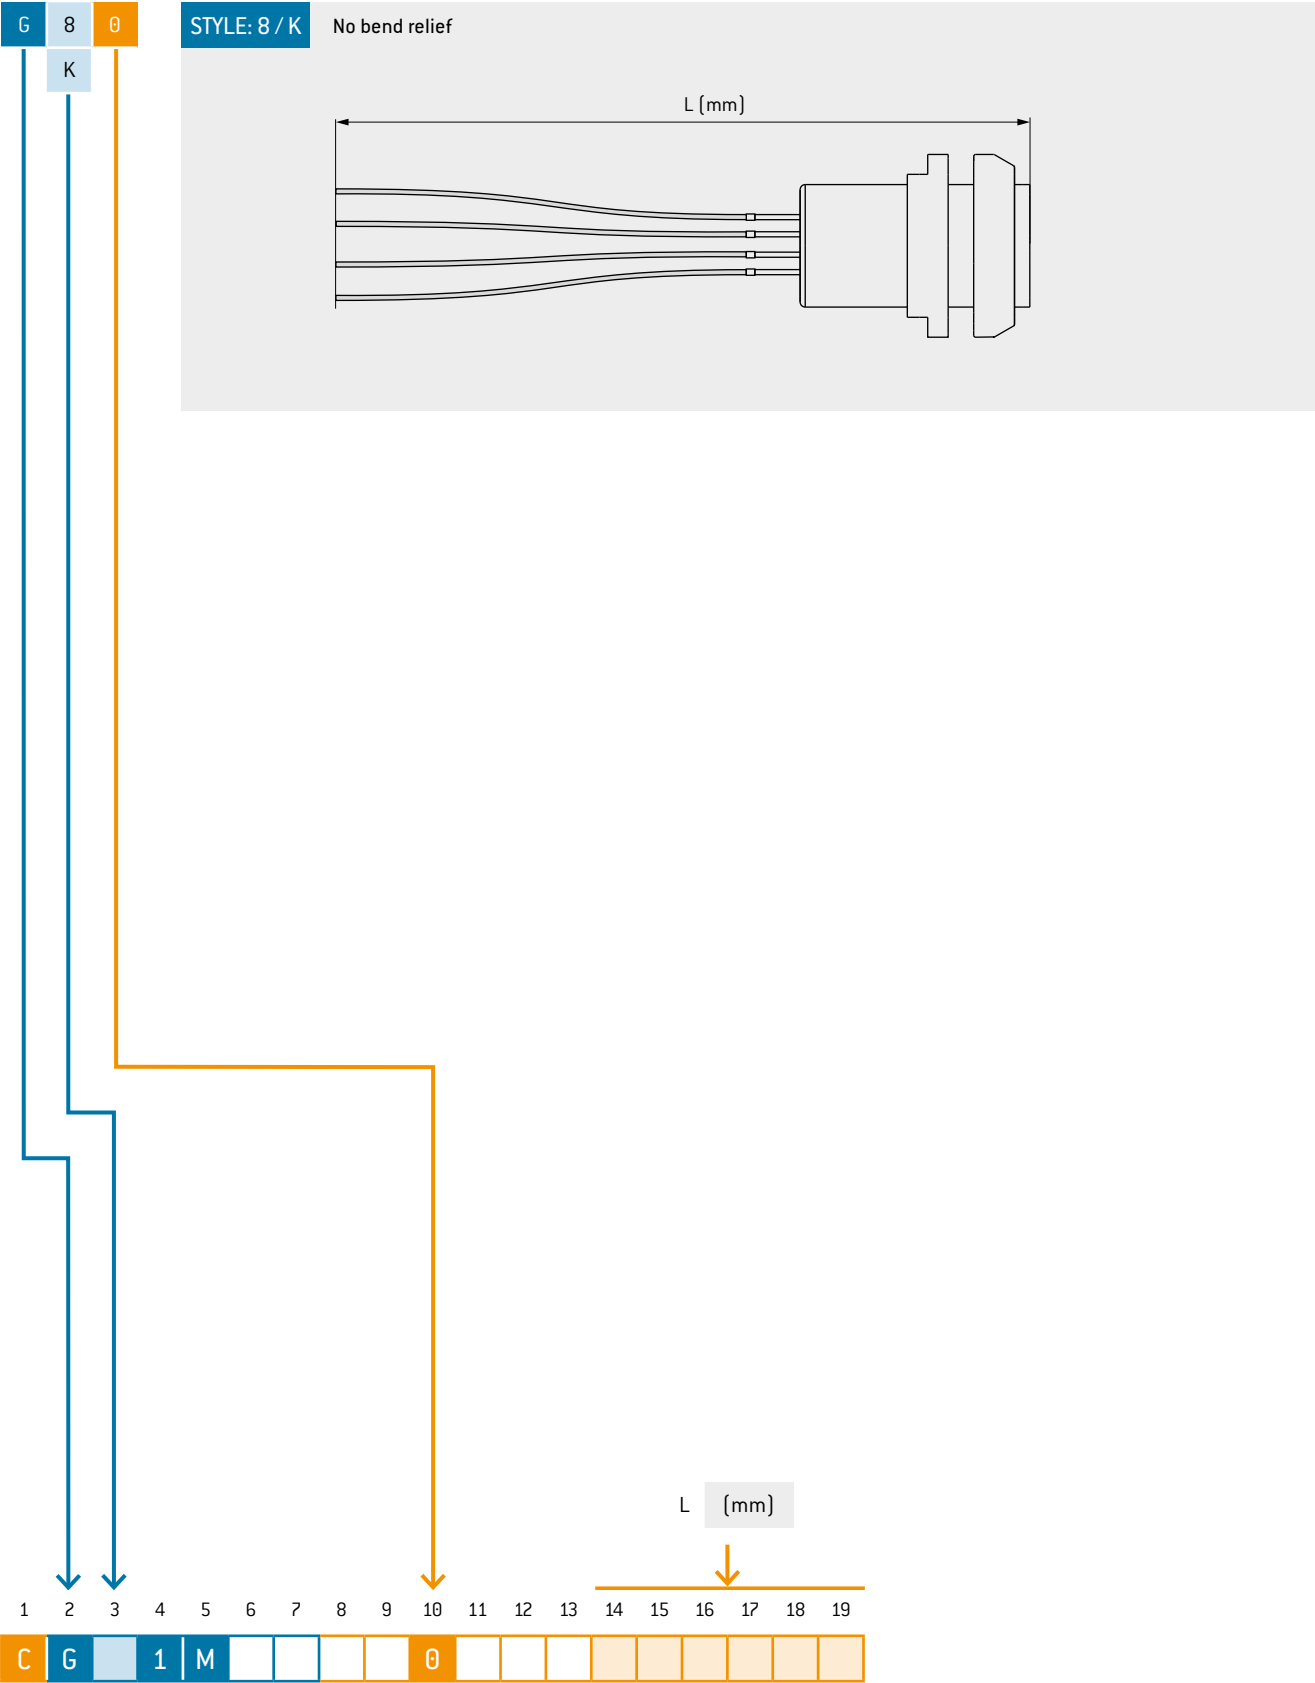

PLASTIC / METAL
HOUSING SIZE 1


RECEPTACLE

G

4

STYLE: 4

For front panel installation




PL



max. 28.5¹
20.4
1
3
a
8
M 14 x 1
Ø 18.5
AF 17
AF 12.4
a = max. 8

IP64/67

PANEL CUT-OUT



AF : 12.5 mm
Ø : 14.1 mm

TECHNICAL DATA

- Contact configuration see page 46 ff.
- Mechanical and color coding see page 44 ff.
- Housing material and color see page 45.
- Style 4 color coding via front nut
- IP64 in mated condition with push-pull plug style S4
- IP67 in mated condition with break-away plug
- IP50 with respect to the end device in unmated condition

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

G

4

1

M

-

P


-

0

¹ Depending on the insert

40

CABLE ASSEMBLY – RECEPTACLE

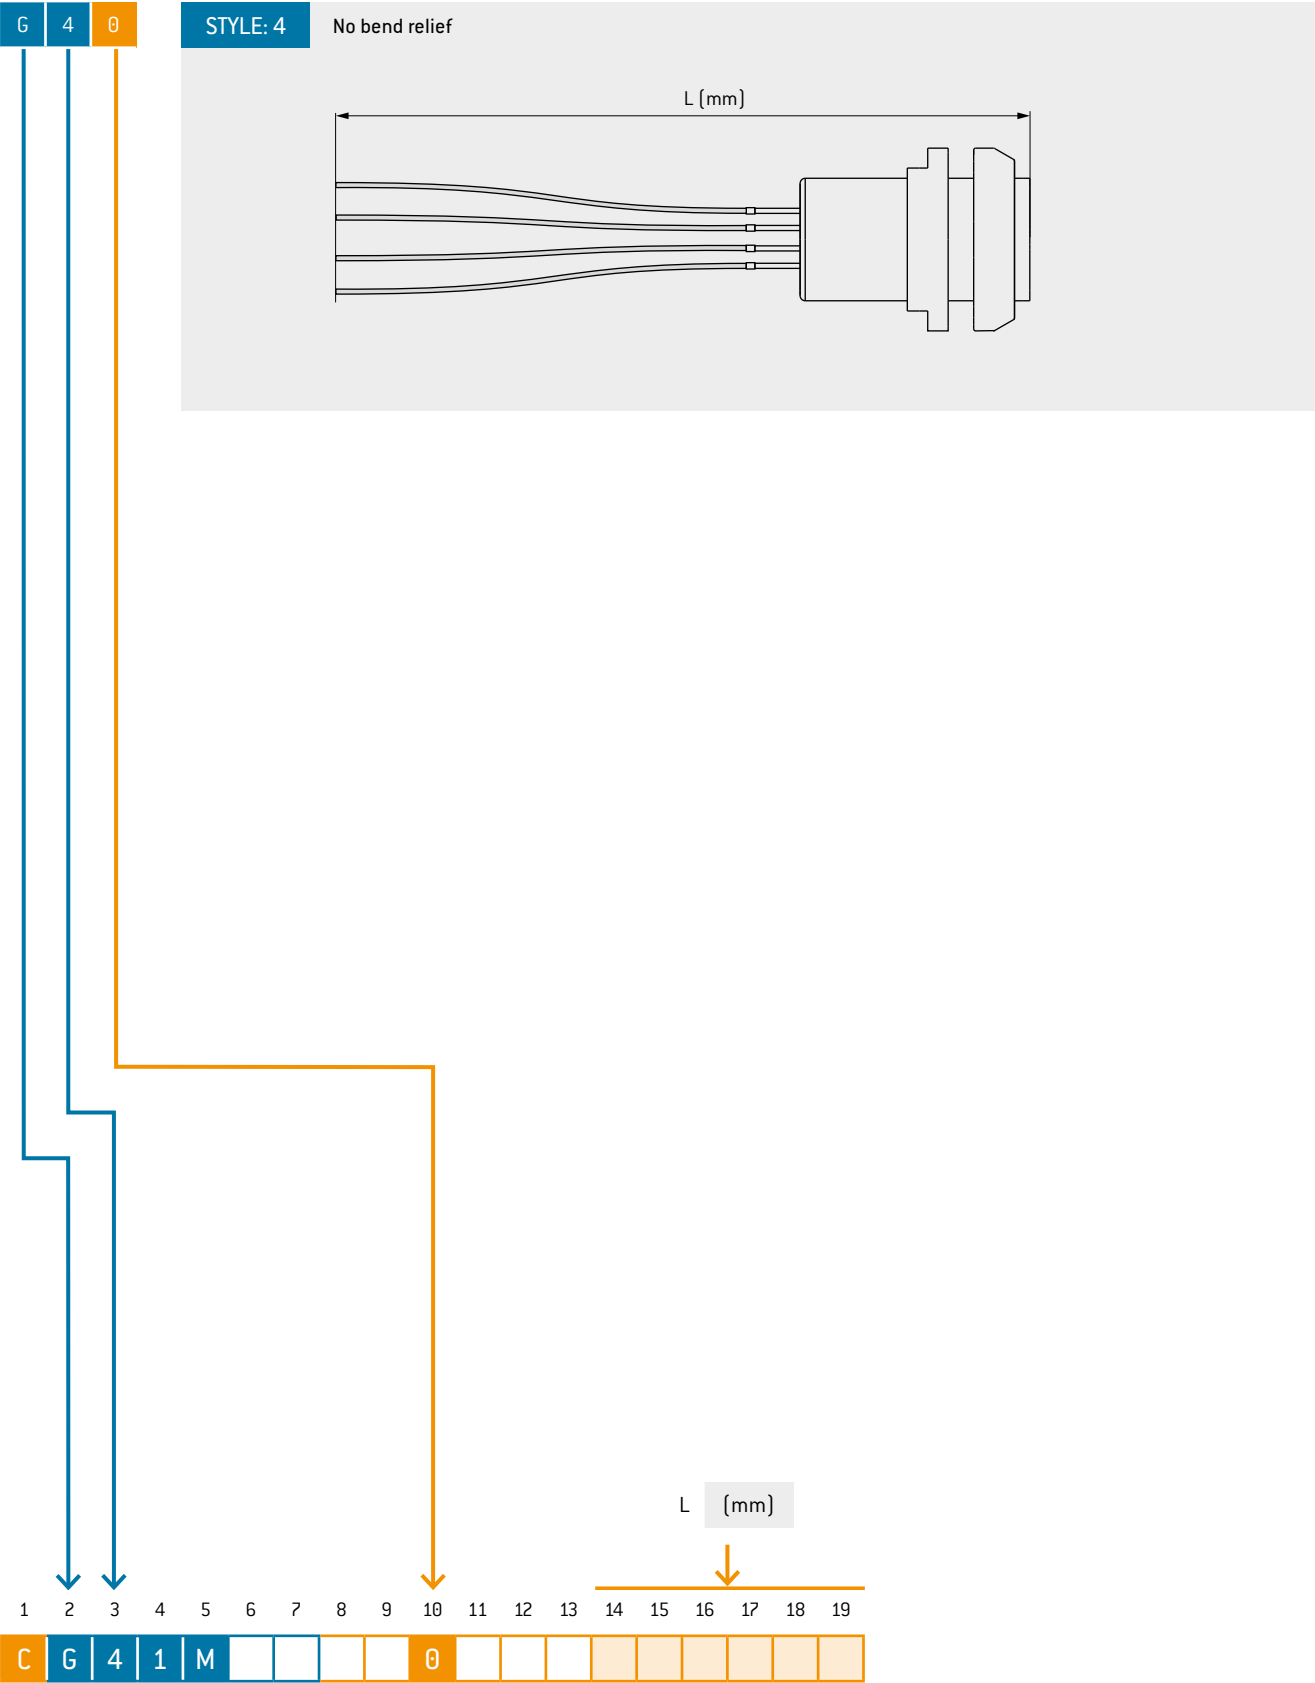

PLASTIC / METAL
HOUSING SIZE 1

RECEPTACLE

G 9


STYLE: 9

For front panel installation


IP50



PL

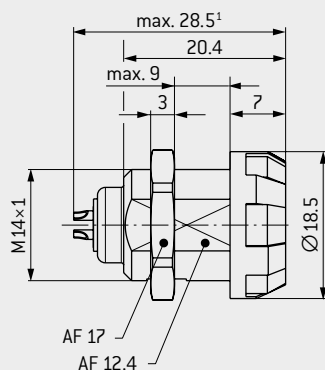

PANEL CUT-OUT



AF : 12.5 mm
Ø : 14.1 mm

TECHNICAL DATA

- Contact configuration see page 46 ff.
- IP50 in mated condition
- IP50 with respect to the end device
- Housing material and color see page 45.
- Available in Black or Gray (further colors on request)

A


STYLE: A

For front panel installation


IP64/67/68




PL

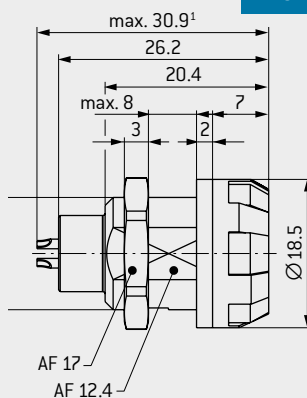

MT



PANEL CUT-OUT



AF : 12.5 mm
Ø : 14.1 mm

TECHNICAL DATA

- Contact configuration see page 46 ff.
- Housing material and color see page 45.
- Plastic version available in Black or Gray (further colors on request)
- IP64 in mated condition with push-pull plug style S4
- IP67 in mated condition with break-away plug (only mateable with plastic receptacle)
- IP68 with respect to the end device in unmated condition
- Solder contacts only


Style 9 and plastic version A needs "0"
Metal version "C"

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19







G 1 M - P - 0

¹ Depending on the insert

CABLE ASSEMBLY – RECEPTACLE

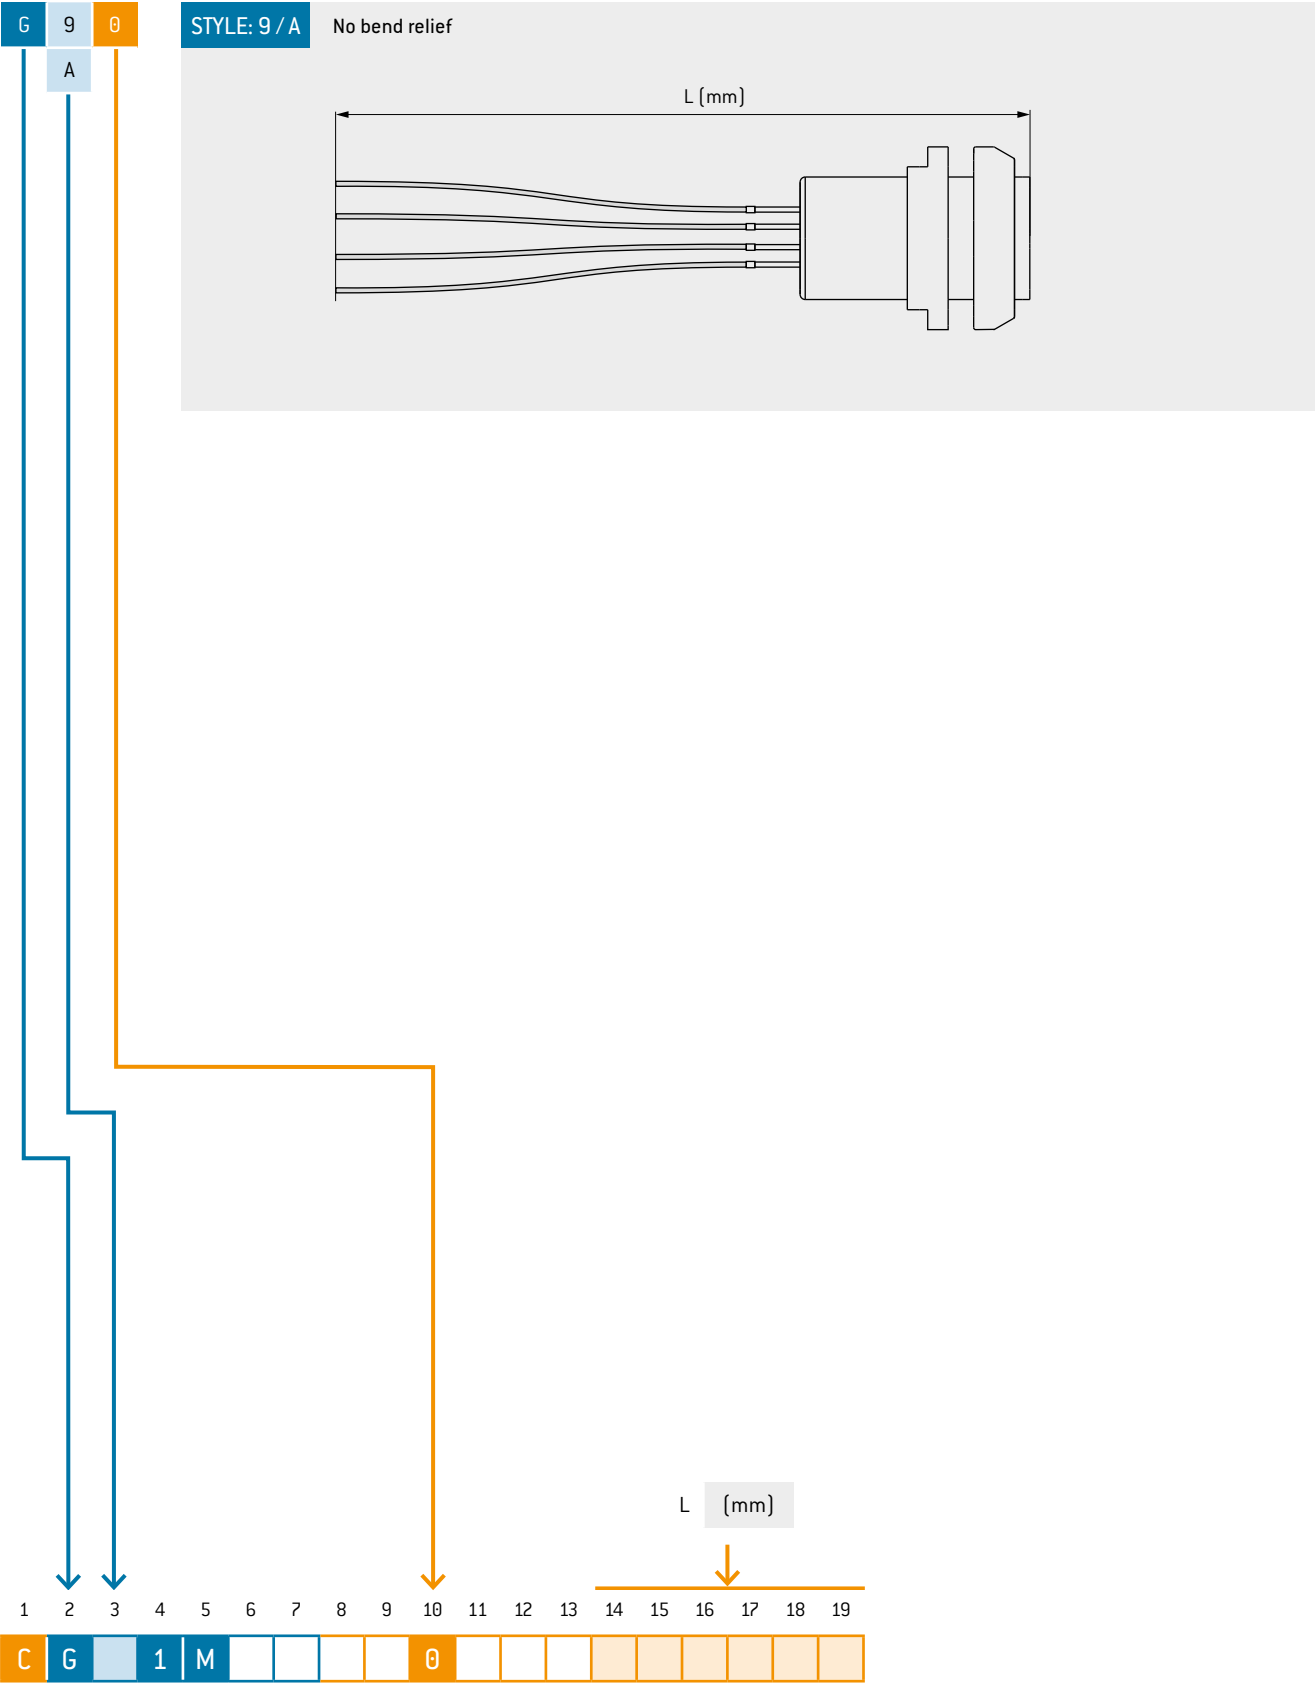

MECHANICAL CODING

| | Angle | Receptacle front view | Plastic | | | Metal | |
|---|-------|-------------------------------------------------------------------------------------|----------------|-----------------|------------|----------------|------------|
| | | | Push-pull plug | Break-away plug | Receptacle | Push-pull plug | Receptacle |
| 0 | 0° |  | ● | ● | ● | ● | ● |
| A | 40° |  | ● | ● | ● | ● | ● |
| C | 60° |  | ● | ● | ● | ● | ● |
| E | 80° |  | ● | ● | ● | ○ | ○ |
| H | 170° |  | ● | ● | ● | ○ | ○ |
| J | 205° |  | ● | ● | ● | ○ | ○ |

● Standard
○ On request

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| | | 1 | M | | | — | | | | | | | | — | | | | |

HOUSING MATERIAL AND COLOR CODING

For autoclaving, choose PEI for push-pull plugs or PSU for break-away plugs.
All receptacles and color codings are autoclavable.

| Color (similar classic RAL) | Material ¹ | Housing material | | | | Color coding | | |
|------------------------------------|-----------------------|-------------------|-------------------|------------|---|---------------|----------------------|----------------|
| | | Push-pull plug | Break-away plug | Receptacle | | Plug back nut | Receptacle front nut | |
| Gray (7045) | PSU | ● | ● autoclavable | ● | 7 | ● | ● | 7 |
| Gray (7045) | PEI | ● autoclavable | — | ● | 6 | ● | ● | 7 |
| Black (9004) | PSU | ● | ● autoclavable | ● | 8 | ● | ● | 8 |
| Black (9004) | PEI | ● autoclavable | — | ● | 5 | ● | ● | 8 |
| Chrome matt | Brass | ● | — | ● | C | ● | ● | C ³ |
| Red (3002) | PSU | ○ | ○ | ○ | 2 | ● | ● | 2 |
| White (9003) | PSU | ○ | ○ | ○ | 3 | ● | ● | 3 |
| Yellow (1016) | PSU | ○ | ○ | ○ | 4 | ● | ● | 4 |
| Green (6032) | PSU | ○ | ○ | ○ | 5 | ● | ● | 5 |
| Blue (5019) | PSU | ○ | ○ | ○ | 6 | ● | ● | 6 |
| Orange (2003) | PSU | ○ | ○ | ○ | 9 | ○ | ○ | 9 |

- Standard
- On request

For more detailed information on the topic of "autoclaving" see page [121](#)

¹ For information about biocompatible materials, please contact sales@odu-de

² Back nuts for cable bend relief have to be ordered in the same color as the connector housing. Please order bend relief separately.

³ Only for metal version

COLOR CODING
BEND RELIEF²
SEE PAGE [54](#)

COLOR CODING PLUG
BACK NUT

HOUSING






















COLOR CODING
FRONT NUT
RECEPTACLE


| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| | | 1 | M | | | — | | | | | | | | — | | | | |

CONTACT INSERT

For push-pull plugs and receptacles
For break-away plug A5, see page [50](#)

All working voltages, unless otherwise stated: < 50 V AC / < 75 V DC
Please refer to [Technical Information](#) for further information
and also for cases where a higher voltage is needed.

| Number of contacts | | Contact type | | Part number key insert | | | Contact diameter mm | Single contact nominal current ¹ A | Nominal current insert A | Clearance and creepage distance contact to contact mm | Test voltage ² EIA kV RMS | Termination diameter mm | Termination cross-section | | View on termination area | |
|--------------------|----------------|-----------------------------|--------|------------------------|---|---|------------------------|--------------------------------------------------|-----------------------------|----------------------------------------------------------|--------------------------------------------|----------------------------|---------------------------|-----------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| | | Termination | Socket | Pin | | | | | | | | | AWG | mm ² | Pin piece | Socket piece |
| 0 | 2 | Solder | L | M | P | N | 1.3 | 14.0 | 14.0 | 1.00 | 1.400 | 1.40 | 18 | 1.00 |  |  |
| | | Print straight ⁴ | O | – | P | H | | 11.0 | 11.0 | 1.30 | | 1.10 | 20 | 0.50 | | |
| | | Angled ⁴ | | | | | | | | | | 0.70 | – | – | | |
| | | | | | | | | | | | | 0.80 | – | – | | |
| 0 | 3 ⁵ | Solder | L | M | P | N | 1.3 | 14.0 | 14.0 | 0.90 | 1.550 | 1.40 | 18 | 1.00 |  |  |
| | | Print straight ⁴ | O | – | P | H | | 11.0 | 11.0 | 1.20 | | 1.10 | 20 | 0.50 | | |
| | | Angled ⁴ | | | | | | | | | | 0.70 | – | – | | |
| | | | | | | | | | | | | 0.80 | – | – | | |
| 0 | 4 | Solder | L | M | J | H | 0.9 | 9.0 | 9.0 | 0.90 | 1.300 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | J | H | | 7.5 | 7.5 | 1.20 | | 0.85 | 22 | 0.38 | | |
| | | Print straight ⁴ | O | – | J | G | | 9.0 | 9.0 | 0.90 | | – | 20–24 | 0.50–0.25 | | |
| | | Angled ⁴ | | | | | | | | | | – | 22–26 | 0.38–0.15 | | |
| 0 | 5 | Solder | L | M | J | H | 0.9 | 9.0 | 6.75 | 0.50 | 1.050 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | J | H | | 7.5 | 5.6 | 0.80 | | 0.85 | 22 | 0.38 | | |
| | | Print straight ⁴ | O | – | J | G | | 9.0 | 6.75 | 0.50 | | – | 20–24 | 0.50–0.25 | | |
| | | Angled ⁴ | | | | | | | | | | – | 22–26 | 0.38–0.15 | | |
| 0 | 6 | Solder | L | M | F | G | 0.7 | 7.5 | 5.6 | 0.65 | 1.100 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | F | G | | 5.0 | 3.75 | 0.85 | | 0.85 | 22 | 0.38 | | |
| | | Print straight ⁴ | O | – | F | D | | 7.5 | 5.6 | 0.65 | | 0.65 | 26 | 0.15 | | |
| | | Angled ⁴ | | | | | | | | | | – | 22–26 | 0.38–0.15 | | |
| 0 | 7 | Solder | L | M | F | G | 0.7 | 7.5 | 4.9 | 0.65 | 1.100 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | F | G | | 5.0 | 3.25 | 0.85 | | 0.85 | 22 | 0.38 | | |
| | | Print straight ⁴ | O | – | F | D | | 7.5 | 4.9 | 0.65 | | 0.65 | 26 | 0.15 | | |
| | | Angled ⁴ | | | | | | | | | | – | 22–26 | 0.38–0.15 | | |
| 0 | 8 | Solder | L | M | F | G | 0.7 | 7.5 | 4.9 | 0.40 | 0.950 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | F | G | | 5.0 | 3.25 | 0.60 | | 0.65 | 26 | 0.15 | | |
| | | Print straight ⁴ | O | – | F | D | | 7.5 | 4.9 | 0.40 | | – | 22–26 | 0.38–0.15 | | |
| | | Angled ⁴ | | | | | | | | | | 0.50 | – | – | | |
| 0 | 9 | Solder | L | M | C | D | 0.5 | 5.0 | 3.25 | 0.45 | 0.900 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | C | D | | 4.0 | 2.6 | 0.65 | | 0.65 | 26 | 0.15 | | |
| | | Print straight ⁴ | O | – | C | C | | 5.0 | 3.25 | 0.45 | | 0.45 | 28 | 0.08 | | |
| | | Angled ⁴ | | | | | | | | | | 0.50 | – | – | | |
| 1 | 0 | Solder | L | M | C | D | 0.5 | 5.0 | 2.75 | 0.30 | 0.600 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | C | C | | 4.0 | 2.2 | 0.50 | | 0.65 | 26 | 0.15 | | |
| | | Print straight ⁴ | O | – | C | C | | 5.0 | 2.75 | 0.30 | | 0.45 | 28 | 0.08 | | |
| | | Angled ⁴ | | | | | | | | | | 0.50 | – | – | | |
| 1 | 2 ⁵ | Solder | L | M | C | D | 0.5 | 5.0 | 2.75 | 0.40 | 0.650 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | C | D | | 4.0 | 2.2 | 0.50 | | 0.65 | 26 | 0.15 | | |
| | | Print straight ⁴ | O | – | C | C | | 5.0 | 2.75 | 0.40 | | 0.45 | 28 | 0.08 | | |
| | | Angled ⁴ | | | | | | | | | | 0.50 | – | – | | |
| 1 | 4 | Solder | L | M | C | D | 0.5 | 5.0 | 2.75 | 0.30 | 0.700 | 1.10 | 20 | 0.50 |  |  |
| | | Crimp ³ | N | P | C | D | | 4.0 | 2.0 | 0.50 | | 0.65 | 26 | 0.15 | | |
| | | Print straight ⁴ | O | – | C | C | | 5.0 | 2.75 | 0.30 | | 0.45 | 28 | 0.08 | | |
| | | Angled ⁴ | | | | | | | | | | 0.50 | – | – | | |

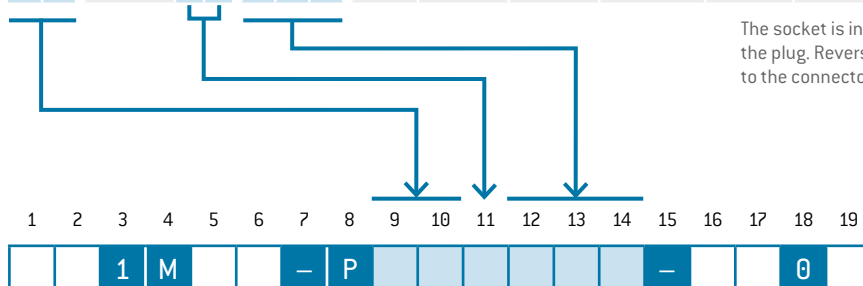

The socket is installed in the (in-line) receptacle, the pin is installed in the plug. Reversed gender variants on request. Values in the table refer to the connector only. Cable specification see page [19](#).

¹ Derating factor, see page [116](#).

² Acc. to EIA-364-20F:2019-02, further information on voltage rating on page [110](#).

³ Tools for crimping and adjustment dimensions for crimping tool, see page [104](#).

⁴ PCB layouts see page [52](#); print termination only available for receptacle styles 5 and 8

⁵ Not compatible to competition

CABLE TYPE

| Number of contacts | Contact type | | | | Single wires ¹ | | | Cable PVC Black unshielded | | | | Cable PVC White unshielded | | | |
|--------------------|--------------|--------|-----|--|---------------------------|------------------|-----|----------------------------|-------------------------|------------------|-----|----------------------------|-------------------------|------------------|-----|
| | Termination | Socket | Pin | | Count number | Wire diameter mm | AWG | Count number | Outer cable diameter mm | Wire diameter mm | AWG | Count number | Outer cable diameter mm | Wire diameter mm | AWG |
| 0 | Solder | L | – | | ZP | 2.15 ± 0.10 | 18 | ZP | 5.30 ± 0.20 | 1.80 ± 0.20 | 18 | ○ | | | |
| | | – | M | | – | – | – | Z0 | 5.30 ± 0.20 | 1.80 ± 0.20 | 18 | | | | |
| | Solder | L | – | | ZN | 1.50 ± 0.05 | 20 | ZN | 4.70 ± 0.20 | 1.50 ± 0.20 | 20 | XN | 4.4 | 1.40 ± 0.08 | 20 |
| | | – | M | | – | – | – | ZM | 4.70 ± 0.20 | 1.50 ± 0.20 | 20 | XM | 4.4 | 1.40 ± 0.08 | 20 |
| 0 | Solder | L | – | | YZ | 2.15 ± 0.10 | 18 | YZ | 5.60 ± 0.20 | 1.80 ± 0.20 | 18 | ○ | | | |
| | | – | M | | – | – | – | YY | 5.60 ± 0.20 | 1.80 ± 0.20 | 18 | | | | |
| | Solder | L | – | | YX | 1.50 ± 0.05 | 20 | YX | 4.90 ± 0.20 | 1.50 ± 0.20 | 20 | WX | 4.6 | 1.40 ± 0.08 | 20 |
| | | – | M | | – | – | – | YW | 4.90 ± 0.20 | 1.50 ± 0.20 | 20 | WW | 4.6 | 1.40 ± 0.08 | 20 |
| 0 | Solder | L | – | | Z3 | 1.50 ± 0.05 | 20 | Z3 | 5.40 ± 0.20 | 1.50 ± 0.20 | 20 | ○ | | | |
| | | – | M | | – | – | – | Z2 | 5.40 ± 0.20 | 1.50 ± 0.20 | 20 | | | | |
| | Solder | L | – | | Z1 | 1.30 ± 0.05 | 22 | Z1 | 4.80 ± 0.20 | 1.30 ± 0.20 | 22 | X1 | 4.5 | 1.25 ± 0.08 | 22 |
| | | – | M | | – | – | – | Z0 | 4.80 ± 0.20 | 1.30 ± 0.20 | 22 | X0 | 4.5 | 1.25 ± 0.08 | 22 |
| 0 | Solder | L | – | | Z3 | 1.50 ± 0.05 | 20 | Z3 | 5.80 ± 0.20 | 1.50 ± 0.20 | 20 | ○ | | | |
| | | – | M | | – | – | – | Z2 | 5.80 ± 0.20 | 1.50 ± 0.20 | 20 | | | | |
| | Solder | L | – | | Z1 | 1.30 ± 0.05 | 22 | Z1 | 5.30 ± 0.20 | 1.30 ± 0.20 | 22 | X1 | 4.9 | 1.25 ± 0.08 | 22 |
| | | – | M | | – | – | – | Z0 | 5.30 ± 0.20 | 1.30 ± 0.20 | 22 | X0 | 4.9 | 1.25 ± 0.08 | 22 |
| 0 | Solder | L | – | | ZL | 1.30 ± 0.05 | 22 | ZL | 5.70 ± 0.20 | 1.30 ± 0.20 | 22 | ○ | | | |
| | | – | M | | – | – | – | ZK | 5.70 ± 0.20 | 1.30 ± 0.20 | 22 | | | | |
| | Solder | L | – | | ZH | 1.00 ± 0.05 | 26 | ZH | 4.70 ± 0.20 | 1.00 ± 0.20 | 26 | XH | 4.6 | 1.00 ± 0.08 | 26 |
| | | – | M | | – | – | – | ZG | 4.70 ± 0.20 | 1.00 ± 0.20 | 26 | XG | 4.6 | 1.00 ± 0.08 | 26 |
| 0 | Solder | L | – | | ZL | 1.30 ± 0.05 | 22 | ○ | | | | ○ | | | |
| | | – | M | | – | – | – | | | | | | | | |
| | Solder | L | – | | ZH | 1.00 ± 0.05 | 26 | ZH | 4.80 ± 0.20 | 1.00 ± 0.20 | 26 | XH | 4.6 | 1.00 ± 0.08 | 26 |
| | | – | M | | – | – | – | ZG | 4.80 ± 0.20 | 1.00 ± 0.20 | 26 | XG | 4.6 | 1.00 ± 0.08 | 26 |
| 0 | Solder | L | – | | ZL | 1.30 ± 0.05 | 22 | ZL | 6.20 ± 0.20 | 1.30 ± 0.20 | 22 | ○ | | | |
| | | – | M | | – | – | – | ZK | 6.20 ± 0.20 | 1.30 ± 0.20 | 22 | | | | |
| | Solder | L | – | | ZH | 1.00 ± 0.05 | 26 | ZH | 5.10 ± 0.20 | 1.00 ± 0.20 | 26 | XH | 5.1 | 1.00 ± 0.08 | 26 |
| | | – | M | | – | – | – | ZG | 5.10 ± 0.20 | 1.00 ± 0.20 | 26 | XG | 5.1 | 1.00 ± 0.08 | 26 |
| 0 | Solder | L | – | | ZV | 1.00 ± 0.05 | 26 | ○ | | | | ○ | | | |
| | | – | M | | – | – | – | | | | | | | | |
| | Solder | L | – | | ZT | 0.90 ± 0.05 | 28 | ZT | 5.40 ± 0.20 | 0.90 ± 0.20 | 28 | XT | 5.0 | 0.85 ± 0.08 | 28 |
| | | – | M | | – | – | – | ZS | 5.40 ± 0.20 | 0.90 ± 0.20 | 28 | XS | 5.0 | 0.85 ± 0.08 | 28 |
| 1 | Solder | L | – | | ZV | 1.00 ± 0.05 | 26 | ZV | 5.70 ± 0.20 | 1.00 ± 0.20 | 26 | ○ | | | |
| | | – | M | | – | – | – | ZU | 5.70 ± 0.20 | 1.00 ± 0.20 | 26 | | | | |
| | Solder | L | – | | ZT | 0.90 ± 0.05 | 28 | ZT | 5.30 ± 0.20 | 0.90 ± 0.20 | 28 | XT | 5.0 | 0.85 ± 0.08 | 28 |
| | | – | M | | – | – | – | ZS | 5.30 ± 0.20 | 0.90 ± 0.20 | 28 | XS | 5.0 | 0.85 ± 0.08 | 28 |
| 1 | Solder | L | – | | ZZ | 1.00 ± 0.05 | 26 | ZZ | 5.90 ± 0.20 | 1.00 ± 0.20 | 26 | ○ | | | |
| | | – | M | | – | – | – | ZY | 5.90 ± 0.20 | 1.00 ± 0.20 | 26 | | | | |
| | Solder | L | – | | ZX | 0.90 ± 0.05 | 28 | ZX | 5.60 ± 0.20 | 0.90 ± 0.20 | 28 | XX | 5.0 | 0.85 ± 0.08 | 28 |
| | | – | M | | – | – | – | ZW | 5.60 ± 0.20 | 0.90 ± 0.20 | 28 | XW | 5.0 | 0.85 ± 0.08 | 28 |
| 1 | Solder | L | – | | ZV | 1.00 ± 0.05 | 26 | ZV | 6.20 ± 0.20 | 1.00 ± 0.20 | 26 | ○ | | | |
| | | – | M | | – | – | – | ZU | 6.20 ± 0.20 | 1.00 ± 0.20 | 26 | | | | |
| | Solder | L | – | | ZT | 0.90 ± 0.05 | 28 | ZT | 5.80 ± 0.20 | 0.90 ± 0.20 | 28 | XT | 5.5 | 0.85 ± 0.08 | 28 |
| | | – | M | | – | – | – | ZS | 5.80 ± 0.20 | 0.90 ± 0.20 | 28 | XS | 5.5 | 0.85 ± 0.08 | 28 |

○ On request

¹ For assembly with receptacle styles without bend relief only



| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| C | | | 1 | M | | | | | | | | | | | | | | |

SPECIAL-CONTACT INSERT

For push-pull plugs and receptacles
For break-away plug A5, see page 50



All working voltages, unless otherwise stated: < 50 V AC / < 75 V DC
Please refer to [Technical Information](#) for further information
and also for cases where a higher voltage is needed.

50 Ω coax

| Coax | | Contact type | | | Part number key insert | | | Contact diameter | Impedance | Frequency range VSWR R < 1.25 | Recommended cable | Nominal current | Test voltage ¹ | Termination cross-section | | View on termination area | |
|------|---|--------------|--------|-----|------------------------|---|---|------------------|-----------|-------------------------------|-------------------|-----------------|---------------------------|---------------------------|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | | Termination | Socket | Pin | | | | | | | | | | AWG | mm² | Pin piece | Socket piece |
| K | 1 | Crimp | N | P | C | D | 0 | 0.5 | 50 | 0 – 3 | RG 174 RG 316 | 2 | 1.000 | 26 | 0.15 |  |  |

<

3 positions main voltage – only for plastic version

| Number of contacts | | Contact type | | | Part number key insert | | | Contact diameter mm | Single contact nominal current A | No-mi-nal current insert A | Clearance and creepage distance contact to contact | | Contact-to-contact voltage | | | Termination diameter mm | Termination cross-section | | View on termination area | |
|--------------------|---|--------------|--------|-----|------------------------|---|---|-----------------------------------------------|-----------------------------------------|-----------------------------------|----------------------------------------------------|---------------|--------------------------------------------------|-----------------------------------------------------|-------------------------------------------------------|--------------------------------|---------------------------|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| | | Termination | Socket | Pin | | | | | | | mated mm | unmated mm | Working voltage ^{1,2,3} IEC V RMS | mated Test voltage ² IEC kV RMS | unmated Test voltage ² IEC kV RMS | | AWG | mm² | Pin piece | Socket piece |
| 0 | 3 | Solder | L | M | J | N | 0 | 1 × 0.9 (first mate last break) 2 × 0.9 | 10 | 10 | 4.7 | 2 | 230 | 3.500 | 2.100 | 1.4 | 18 | 1 |  |  |

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

1

M

—

P

0

3

J

N

0

—



The pin is installed in the [in-line] receptacle, the socket is installed in the plug. Values in the table refer to the connector only.

¹ In the case of the pin piece, voltage may only be applied in mated condition.

² IEC 60664-1:2020 (VDE 0110-1:2022-07): Overvoltage category III (in three phase 230 V / 400V AC supply systems. Rated impulse voltage 4.000 kV) (p. 111)

³ IEC 60664-1:2020 (VDE 0110-1:2022-07): Pollution degree 3 (p. 111)

Media feed through

| Media feed through | Feed through | Contact type | | Part number key insert | | | Contact inner diameter mm | Working pressure max. bar | Termination diameter mm | Tube diameter max. mm | View on termination area | |
|--------------------|--------------|--------------|-----|------------------------|---|---|------------------------------|------------------------------|----------------------------|--------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| | | Socket | Pin | | | | | | | | Pin piece | Socket piece |
| F | Non Shut Off | B | S | 1 | 1 | 0 | 2.5 | 2 | 4 | 6 |  |  |

Shut off version on request

The socket is installed in the (in-line) receptacle, the pin is installed in the plug.

CABLE TYPE

50 Ω coax

| Number of contacts | | Contact type | | | Coax cable PVC RG 174 | | |
|--------------------|---|--------------|--------|-----|-----------------------|----------------------------|----------------------------|
| | | Termination | Socket | Pin | Count number | Outer cable diameter mm | Inner cable diameter mm |
| K | 1 | Crimp | L | – | VN | 2.80 ± 0.15 | 1.52 ± 0.10 |
| | | | – | M | VM | 2.80 ± 0.15 | 1.52 ± 0.10 |

12

13

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

C

1

M

K


1

3 positions main voltage – only for plastic version

| Number of contacts | | Contact type | | | Single wires | | | Cable PVC Black unshielded | | | | Cable PVC White unshielded | | | |
|--------------------|---|--------------|--------|-----|--------------|---------------------|-----|----------------------------|----------------------------|---------------------|-----|----------------------------|----------------------------|---------------------|-----|
| | | Termination | Socket | Pin | Count number | Wire diameter mm | AWG | Count number | Outer cable diameter mm | Wire diameter mm | AWG | Count number | Outer cable diameter mm | Wire diameter mm | AWG |
| 0 | 3 | Solder | L | – | ○ | | | ○ | | | | ○ | | | |
| | | | – | M | | | | | | | | | | | |

○ On request

Media feed through – Air and fluid hoses assembly on request

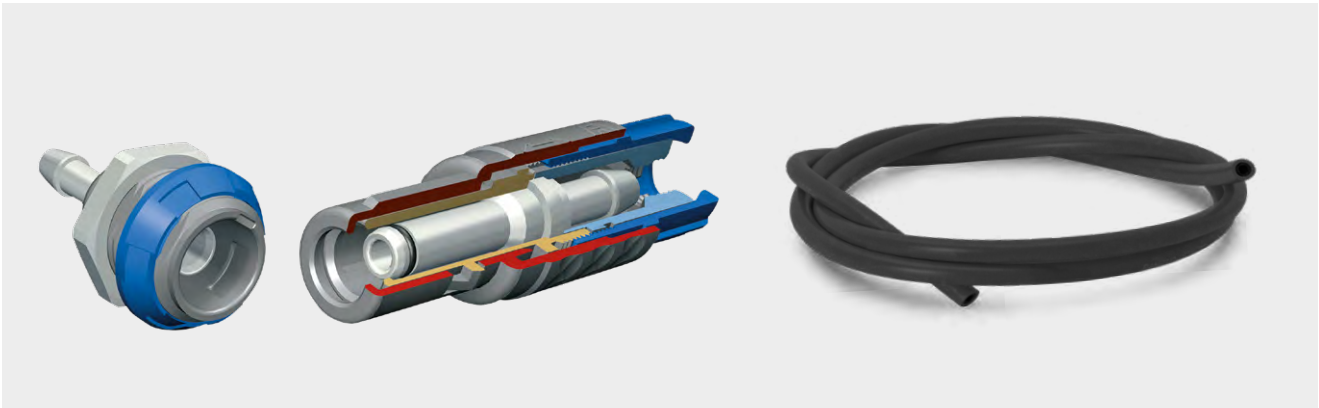

CONTACT INSERT STYLE A5




All working voltages, unless otherwise stated: < 50 V AC / < 75 V DC
Please refer to [Technical Information](#) for further information
and also for cases where a higher voltage is needed.

| Number of contacts | | Contact type | | Part number key insert | | | Contact diameter mm | Single contact nominal current ¹ A | Nominal current insert A | Clearance and creepage distance contact to contact mm | Test voltage ² EIA kV RMS | Termination diameter mm | Termination cross-section | | View on termination area Pin piece |
|--------------------|---|--------------|-----|------------------------|---|---|------------------------|--------------------------------------------------|-----------------------------|----------------------------------------------------------|-----------------------------------------|----------------------------|---------------------------|------|---------------------------------------|
| | | Termination | Pin | | | | | | | | | | AWG | mm² | |
| 0 | 2 | Solder | B | P | H | 0 | 1.3 | 11.0 | 11.0 | 1.30 | 1.400 | 1.10 | 20 | 0.50 | |
| 0 | 3 | Solder | | P | H | 9 | 1.3 | 11.0 | 11.0 | 1.20 | 1.550 | 1.10 | 20 | 0.50 | |
| 0 | 4 | Solder | | J | G | 0 | 0.9 | 7.5 | 7.5 | 1.20 | 1.300 | 0.85 | 22 | 0.38 | |
| 0 | 5 | Solder | | J | G | 0 | 0.9 | 7.5 | 5.6 | 0.80 | 1.050 | 0.85 | 22 | 0.38 | |
| 0 | 6 | Solder | | F | D | 0 | 0.7 | 5.0 | 3.75 | 0.85 | 1.100 | 0.65 | 26 | 0.15 | |
| 0 | 7 | Solder | | F | D | 0 | 0.7 | 5.0 | 3.25 | 0.85 | 1.100 | 0.65 | 26 | 0.15 | |
| 0 | 8 | Solder | | F | D | 0 | 0.7 | 5.0 | 3.25 | 0.60 | 0.950 | 0.65 | 26 | 0.15 | |
| 0 | 9 | Solder | | C | C | 0 | 0.5 | 4.0 | 2.6 | 0.65 | 0.900 | 0.45 | 28 | 0.08 | |
| 1 | 0 | Solder | | C | C | 0 | 0.5 | 4.0 | 2.2 | 0.50 | 0.600 | 0.45 | 28 | 0.08 | |
| 1 | 2 | Solder | | C | C | 9 | 0.5 | 4.0 | 2.2 | 0.50 | 0.650 | 0.45 | 28 | 0.08 | |
| 1 | 4 | Solder | | C | C | 0 | 0.5 | 4.0 | 2.0 | 0.50 | 0.700 | 0.45 | 28 | 0.08 | |

Values in the table refer to the connector only.
Cable specification see page 19.


¹ Derating factor, see page 116.

² Acc. to EIA-364-20F:2019-02, further information on voltage rating on page 110.

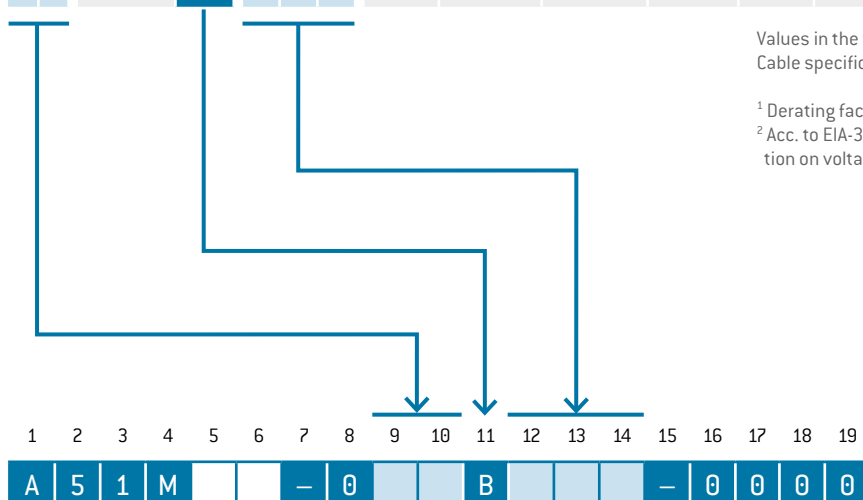













































CABLE TYPE

| Number of contacts | | Contact type | | Cable PVC Black unshielded | | | | Cable PVC White unshielded | | | |
|--------------------|---|--------------|-----|----------------------------|----------------------------|---------------------|-----|----------------------------|----------------------------|---------------------|-----|
| | | Termination | Pin | Count number | Outer cable diameter mm | Wire diameter mm | AWG | Count number | Outer cable diameter mm | Wire diameter mm | AWG |
| 0 | 2 | Solder | B | ZE | 4.70 ± 0.20 | 1.50 ± 0.20 | 20 | XE | 4.40 ± 0.20 | 1.40 ± 0.08 | 20 |
| 0 | 3 | Solder | B | ZC | 4.90 ± 0.20 | 1.50 ± 0.20 | 20 | XC | 4.60 ± 0.20 | 1.40 ± 0.08 | 20 |
| 0 | 4 | Solder | B | ZA | 4.80 ± 0.20 | 1.30 ± 0.20 | 22 | XA | 4.50 ± 0.20 | 1.20 ± 0.08 | 22 |
| 0 | 5 | Solder | B | ZA | 5.30 ± 0.20 | 1.30 ± 0.20 | 22 | XA | 4.90 ± 0.20 | 1.20 ± 0.08 | 22 |
| 0 | 6 | Solder | B | Z8 | 4.70 ± 0.20 | 1.00 ± 0.20 | 26 | X8 | 4.60 ± 0.20 | 1.00 ± 0.08 | 26 |
| 0 | 7 | Solder | B | Z8 | 4.80 ± 0.20 | 1.00 ± 0.20 | 26 | X8 | 4.60 ± 0.20 | 1.00 ± 0.08 | 26 |
| 0 | 8 | Solder | B | Z8 | 5.10 ± 0.20 | 1.00 ± 0.20 | 26 | X8 | 5.10 ± 0.20 | 1.00 ± 0.08 | 26 |
| 0 | 9 | Solder | B | Z6 | 5.40 ± 0.20 | 0.90 ± 0.20 | 28 | X6 | 5.00 ± 0.20 | 0.85 ± 0.08 | 28 |
| 1 | 0 | Solder | B | Z6 | 5.30 ± 0.20 | 0.90 ± 0.20 | 28 | X6 | 5.00 ± 0.20 | 0.85 ± 0.08 | 28 |
| 1 | 2 | Solder | B | Z4 | 5.60 ± 0.20 | 0.90 ± 0.20 | 28 | X4 | 5.00 ± 0.20 | 0.85 ± 0.08 | 28 |
| 1 | 4 | Solder | B | Z6 | 5.80 ± 0.20 | 0.90 ± 0.20 | 28 | X6 | 5.50 ± 0.20 | 0.85 ± 0.08 | 28 |

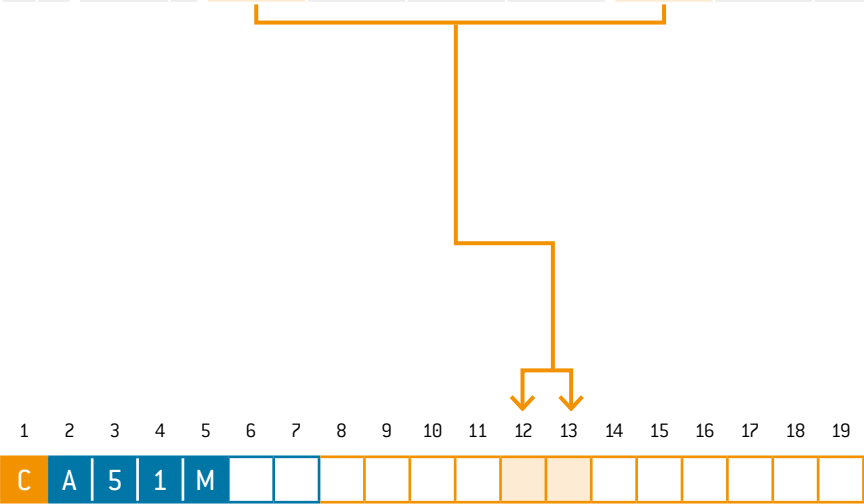

PCB LAYOUT

For PCB contacts [Size 1]

| | Straight | 90° right-angled | | Straight | 90° right-angled |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2 contacts |  <p>Contact borehole: $\varnothing 0.8$ mm</p>  |  <p>Contact borehole: $\varnothing 0.9$ mm</p>  | 8 contacts |  <p>Contact borehole: $\varnothing 0.6$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  |
| 3 contacts |  <p>Contact borehole: $\varnothing 0.8$ mm</p>  |  <p>Contact borehole: $\varnothing 0.9$ mm</p>  | 9 contacts |  <p>Contact borehole: $\varnothing 0.6$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  |
| 4 contacts |  <p>Contact borehole: $\varnothing 0.8$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  | 10 contacts |  <p>Contact borehole: $\varnothing 0.6$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  |
| 5 contacts |  <p>Contact borehole: $\varnothing 0.8$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  | 12 contacts |  <p>Contact borehole: $\varnothing 0.6$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  |
| 6 contacts |  <p>Contact borehole: $\varnothing 0.6$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  | 14 contacts |  <p>Contact borehole: $\varnothing 0.6$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  |
| 7 contacts |  <p>Contact borehole: $\varnothing 0.6$ mm</p>  |  <p>Contact borehole: $\varnothing 0.7$ mm</p>  | | | |

All specifications are only valid for socket inserts, pin inserts on request. Further PCB layouts upon request


RIGHT-ANGLED PCB CONTACT IN THE RECEPTACLE

A

RIGHT-ANGLED PCB CONTACT

IP50

For plastic style G5 / G8
For metal style G5 / GK



| Contact diameter | Termination diameter |
|------------------|----------------------|
| mm | mm |
| 0.5 | 0.5 |
| 0.7 | 0.6 |
| 0.9 | 0.6 |
| 1.3 | 0.8 |


12345678910111213141516171819

| | | | | | | | | | | | | | | | | | | |
|--|--|---|---|--|--|---|---|--|--|--|--|--|--|--|---|---|---|--|
| | | 1 | M | | | - | P | | | | | | | | - | A | 0 | |
|--|--|---|---|--|--|---|---|--|--|--|--|--|--|--|---|---|---|--|

CABLE COLLET SYSTEM

For strain relief of push-pull plugs, inline receptacles and receptacles style 6

| | | Cable diameter | Material |
|---|---|----------------|-----------|
| | | mm | |
| 3 | 9 | > 2.7–3.9 | PSU / PEI |
| 5 | 2 | > 4.0–5.2 | |
| 6 | 5 | > 5.3–6.5 | |

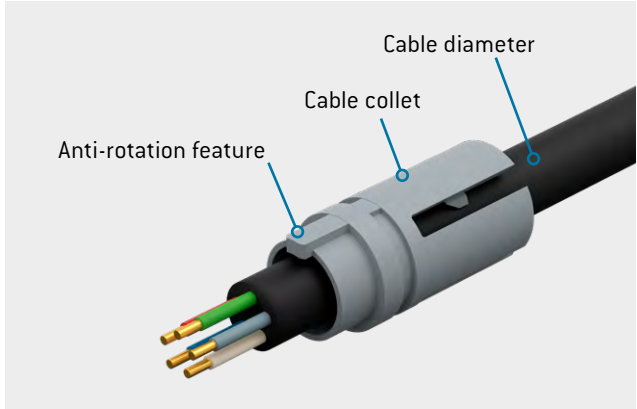



12345678910111213141516171819

| | | | | | | | | | | | | | | | | | | |
|--|--|---|---|--|--|---|---|--|--|--|--|--|--|--|---|--|--|--|
| | | 1 | M | | | - | P | | | | | | | | - | | | |
|--|--|---|---|--|--|---|---|--|--|--|--|--|--|--|---|--|--|--|

CABLE BEND RELIEF

For push-pull plug style 2 / 4 and in-line receptacle style 2 / 6

SILICONE CABLE BEND RELIEF

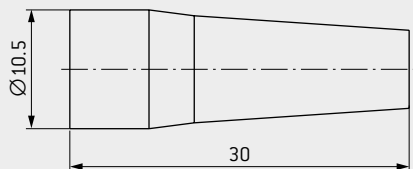

| Part number | Cable diameter | |
|----------------------|----------------|------|
| | min. | max. |
| 701.023.____.965.025 | 2.5 | 3.0 |
| 701.023.____.965.030 | 3.0 | 3.5 |
| 701.023.____.965.035 | 3.5 | 4.0 |
| 701.023.____.965.040 | 4.0 | 5.0 |
| 701.023.____.965.050 | 5.0 | 6.0 |
| 701.023.____.965.060 | 6.0 | 6.5 |

| Color code | Color (Similar classic RAL) |
|------------|-----------------------------|
| 202 | Red (3020) |
| 203 | White (9010) |
| 204 | Yellow (1016) |
| 205 | Green (6032) |
| 206 | Blue (5002) |
| 207 | Gray (7005) |
| 208 | Black (9005) |

COLOR CODE FOR CABLE ASSEMBLY (SIMILAR CLASSIC RAL)

Plastic receptacle style 9, A, E
Metal receptacle style 1, A

Silicone bend relief

TPU overmolding


Push-pull plug back nut style 1
In-line receptacle style 1 / 5
Plastic receptacle front nut style 1 / 4 / 5 / 6 / 8
Metal receptacle front nut style 5, K

| | | | | | | | |
|---|----------------|---|---------------|---|--------------|---|---------------|
| 0 | not applicable | 2 | Red (3020) | 7 | Gray (7045) | 2 | Red (3002) |
| | | 3 | White (9010) | 8 | Black (9005) | 3 | White (9003) |
| | | 4 | Yellow (1016) | | | 4 | Yellow (1016) |
| | | 5 | Green (6032) | | | 5 | Green (6032) |
| | | 6 | Blue (5002) | | | 6 | Blue (5019) |
| | | 7 | Gray (7005) | | | 7 | Gray (7045) |
| | | 8 | Black (9005) | | | 8 | Black (9004) |

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

C 1 M

RIGHT ANGLED CABLE OUTLET BACKSHELL FOR BREAK-AWAY PLUG

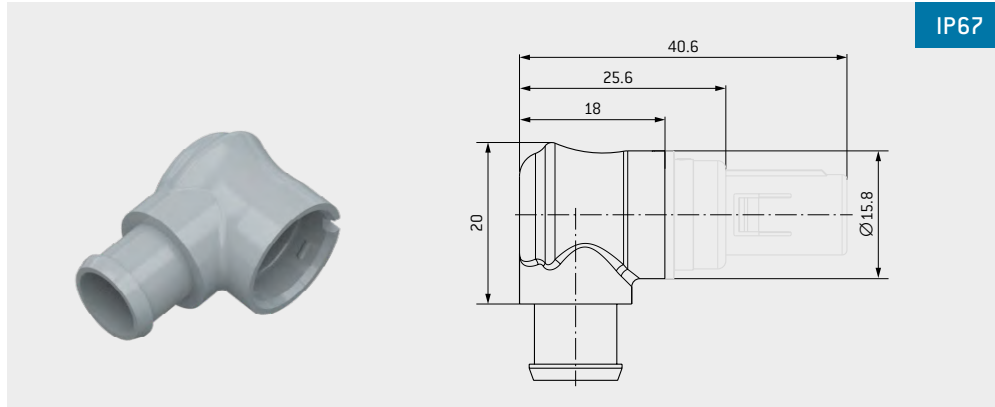


IP67 in assembled and potted condition / potting for strain relief necessary

| Part number | Material | Cable diameter max. | Color [Similar classic RAL] |
|---------------------|----------|---------------------|-------------------------------|
| 026.KM1.013.701.007 | PSU | 6.5 | Gray (7045) |
| 026.KM1.013.701.008 | PSU | | Black (9004) |

CABLE BEND RELIEF FOR RIGHT ANGLED CABLE OUTLET BACKSHELL


| Part number | Dim. L | Cable diameter | |
|----------------------|--------|----------------|------|
| | mm | min. | max. |
| 702.023.____.965.025 | 36 | 2.5 | 3.0 |
| 702.023.____.965.030 | | 3.0 | 3.5 |
| 702.023.____.965.035 | | 3.5 | 4.0 |
| 702.023.____.965.040 | | 4.0 | 5.0 |
| 702.023.____.965.050 | | 5.0 | 6.0 |
| 702.023.____.965.060 | | 6.0 | 6.5 |

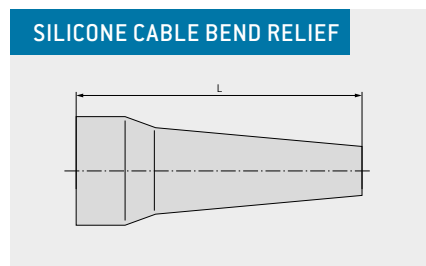

| Color code | Color [Similar classic RAL] |
|------------|-------------------------------|
| 202 | Red (3020) |
| 203 | White (9010) |
| 204 | Yellow (1016) |
| 205 | Green (6029) |
| 206 | Blue (5002) |
| 207 | Gray (7005) |
| 208 | Black (9005) |



STRAIGHT CABLE OUTLET BACKSHELL FOR BREAK-AWAY PLUG

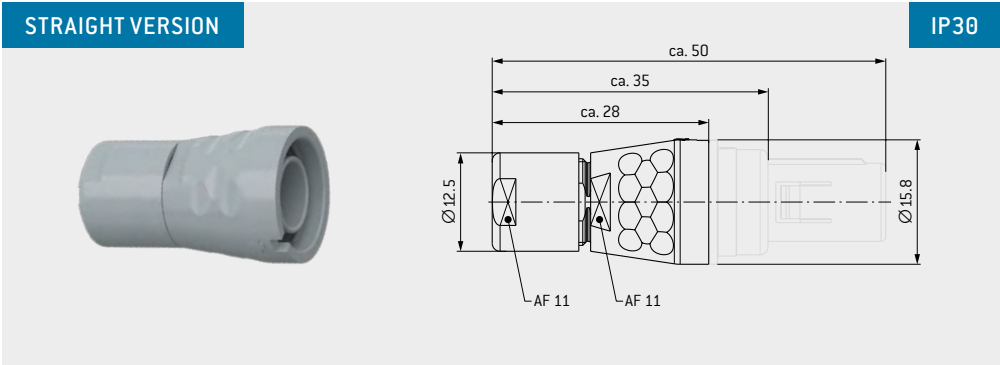


Straight version includes cable collet system for strain relief.

| Part number | Material | Cable diameter mm | Color code | Color (Similar classic RAL) |
|--------------------|---------------------------|----------------------|------------|-----------------------------|
| 026.KM1.129.9__025 | PSU / PEI ¹ | > 1.5 – 2.5 | 07 | Gray (7045) |
| 026.KM1.129.9__037 | | > 2.5 – 3.7 | 08 | Black (9004) |
| 026.KM1.129.9__049 | | > 3.7 – 4.9 | | |
| 026.KM1.129.9__060 | | > 4.9 – 6.0 | | |

¹ Housing and cable clamp PSU, back nut PEI

PROTECTIVE COVER


Applicable to receptacles and in-line receptacles with plastic housing

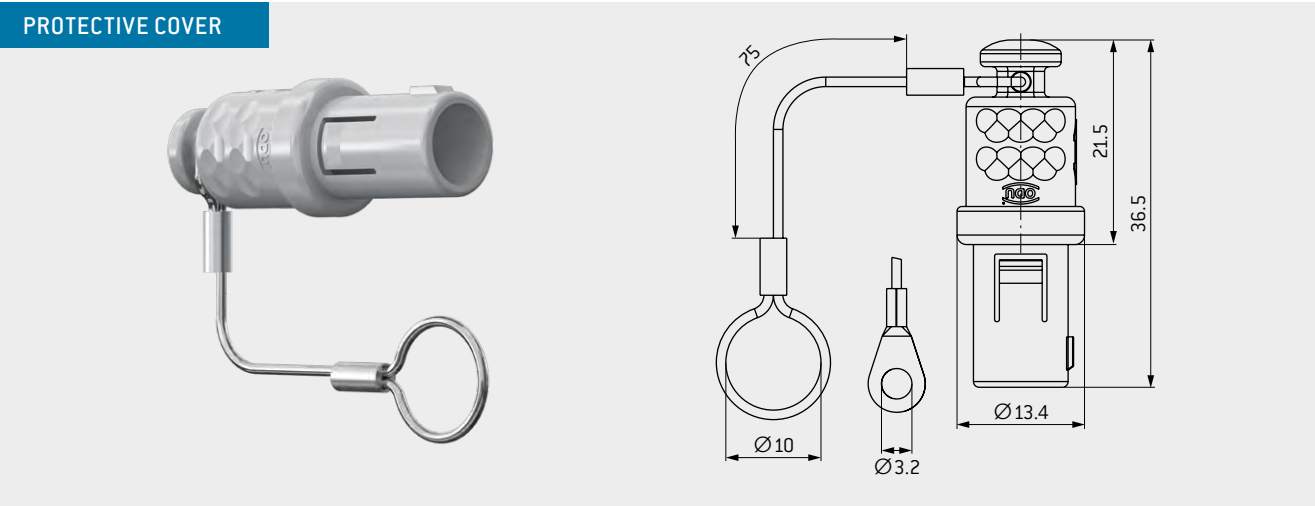

| Part number | Material | Color (Similar classic RAL) | | Coding | Lanyard material | |
|---------------------|----------|-----------------------------|-------------------|--------|------------------|-------------------------------------------|
| | | Cover | Polyamide lanyard | | | |
| KM1.097.0_6.934._02 | PSU | Red (3020) | White | 0 | 0° | 0 Polyamide lanyard with loop |
| KM1.097.0_6.934._03 | PSU | White (9003) | | A | 40° | |
| KM1.097.0_6.934._04 | PSU | Yellow (1016) | | C | 60° | 1 Stainless steel lanyard with loop |
| KM1.097.0_6.934._05 | PSU | Green (6032) | | E | 80° | 2 Polyamide lanyard with solder lug |
| KM1.097.0_6.934._06 | PSU | Blue (5019) | | H | 170° | |
| KM1.097.0_6.934._07 | PSU | Gray (7045) | | J | 205° | 3 Stainless steel lanyard with solder lug |
| KM1.097.0_6.934._08 | PSU | Black (9005) | Black | | | |
| KM1.097.0_6.933._08 | PEI | | | | | |

TRANSPORTATION CAP

Applicable to all straight plugs, right-angled plugs as well as break-away plugs

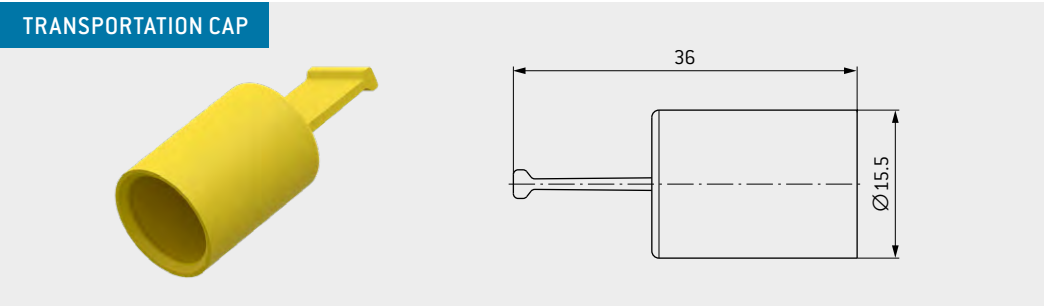

| Part number | Material | Color (Similar classic RAL) |
|---------------------|----------|-----------------------------|
| 922.000.002.000.075 | TPE | Yellow (1016) |



ODU MEDI-SNAP®



ODU MEDI-SNAP® WITH PLASTIC HOUSING SIZE 2

| | |
|-------------------------------------------------------|--------------------|
| ODU MEDI-SNAP® Plastic housing size 2 – Summary | 60 |
| Plug and cable assembly | 62 |
| Receptacle and cable assembly | 66 |
| Mechanical coding | 70 |
| Housing material and color coding | 71 |
| Contact insert and cable assembly | 72 |
| PCB layout | 76 |
| Cable collet system | 78 |
| Accessories | 79 |

ODU MEDI-SNAP® PLASTIC HOUSING SIZE 2 – SUMMARY

The ODU MEDI-SNAP® with plastic housing in size 2 is coded by pin and groove. These circular connectors can have a variety of configurations: numerous styles of connectors and receptacles as well as various termination types, contact inserts and color codings.

- Coding over pin and groove
- 8 color codings
- 3 mechanical codings
- 3–26 contacts
- 2 termination types
- Contacts for solder and PCB termination
- A selection of numerous connectors and receptacles
- IP50 and IP64 available in mated condition
- Up to 2,000 / 5,000 mating cycles

| STRAIGHT PLUG – PUSH-PULL | | P. 62 | 2,000 mating cycles |
|---------------------------|-------------------------------------------------------------------------------------|-------|------------------------|
| IP50 |  | PL | S 1 |
| IP 64 |  | PL | S 4 |
| BREAK-AWAY PLUG | | P. 64 | 2,000 mating cycles |
| IP 64 |  | PL | A 5 |

PL Plastic

For assembly instructions, please refer to our website: www.odu-connectors.com/downloads/assembly-instructions

| RECEPTACLE | | P. 66 | 5,000 mating cycles |
|----------------------------------------------------------|------------------------------------------------------------------------------------|-------|------------------------|
| IEC 60601-1: 2 M00P ¹ and 1 M0PP ¹ | | | |
| IP50 | | | |
| PL |  | G | 1 |
| IEC 60601-1: 2 M00P ¹ and 2 M0PP ¹ | | | |
| IP64 | | | |
| PL |  | G | 4 |
| IEC 60601-1: 2 M00P ¹ and 1 M0PP ¹ | | | |
| IP50 | | | |
| PL |  | G | 5 |

¹ As per IEC 60601-1:2012 (VDE 0750-1:2013-12).

Max working voltage of the medical device 250 V AC (degree of pollution 2).
All cable assemblies in the catalog fulfill 1M00P/1M0PP.

To ensure the required clearance and creepage distance in the termination area of plug style A5, a corresponding potting sleeve must be used (not included in the scope of delivery).

CABLE ASSEMBLY – STRAIGHT PLUG

S

1

1

4

3

STYLE: 1

With standard back nut

L (mm)

STYLE: 4

With silicone bend relief

L (mm)

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

C

S

2

M

L (mm)

For support and customer specific solutions: sales@odu.de

BREAK-AWAY PLUG

Break-away styles


A

5


STYLE: 5

Suitable for overmolding (without cable outlet)

IP64



PL

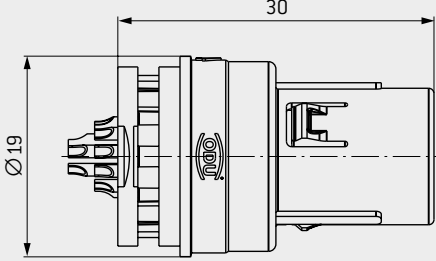

TECHNICAL DATA

- Contact configuration see page 74 ff.
- Mechanical and color coding see page 70.
- Housing material and color see page 71.
- Accessories see page 79 ff.
- IP rate in mated condition and depending on the mating receptacle
- Housing and insulator moulded in one piece

1

2

3

4

5

6

7

8¹

9

10

11

12

13

14

15

16

17

18

19

A

5

2

M

C

7

—

0

—

0


0

0

0

¹ In the case of this style, the connector housing as well as the insulator are made of the housing material PSU.

CABLE ASSEMBLY – BREAK-AWAY PLUG

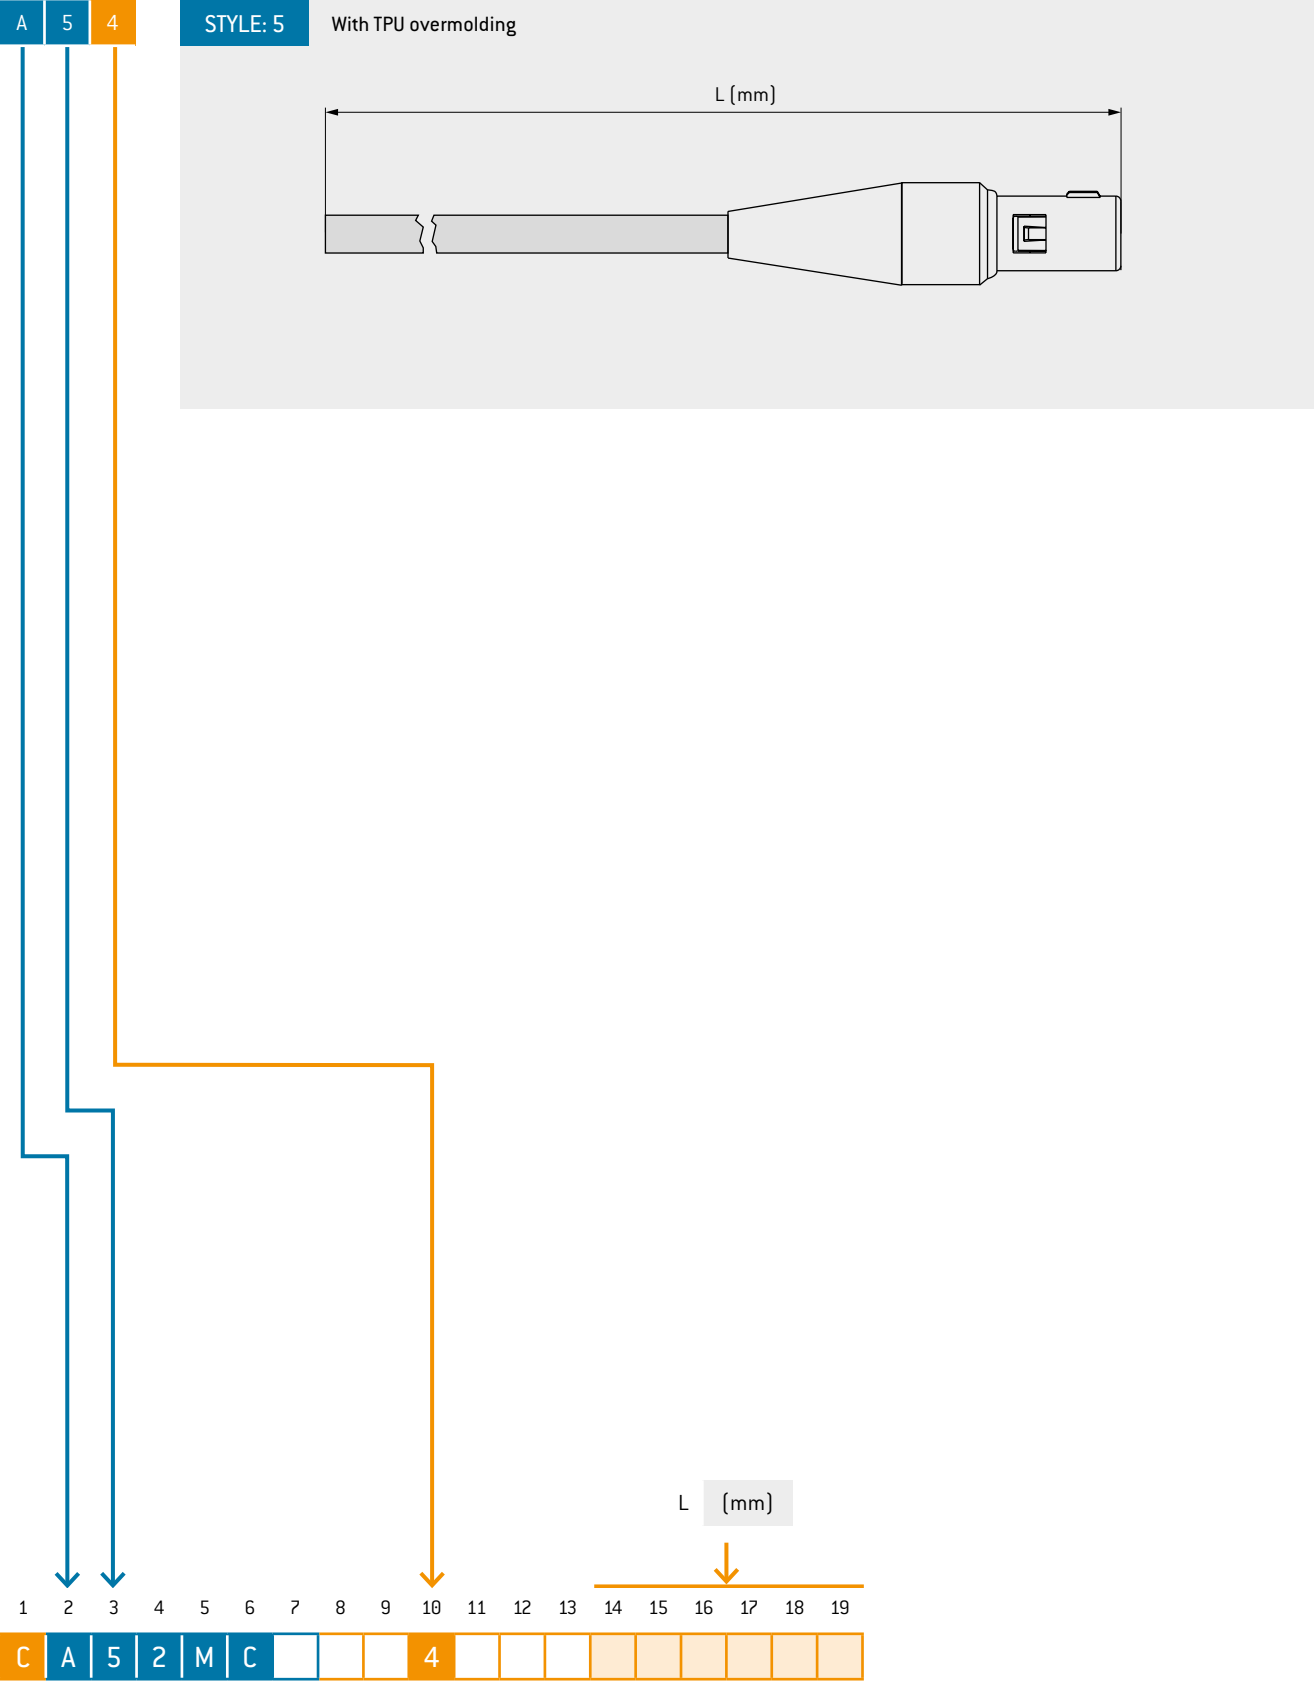

RECEPTACLE

G


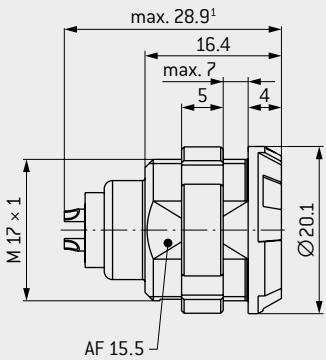
1


5

STYLE: 1

IP50

For front panel installation


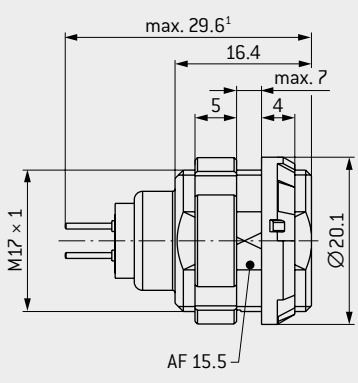



AF : 15.6 mm
Ø : 17.1 mm

STYLE: 5

IP50

For front or rear panel installation



AF : 15.6 mm
Ø : 17.1 mm

TECHNICAL DATA

- Contact configuration see page 72 ff.
- Mechanical and color coding see page 70.
- Style G1 available in Black or Gray (further color on request)
- Housing material and color see page 71.
- IP50 in mated condition
- IP50 with respect to the end device in unmated condition

Style 1,
default "0"

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17


18

19

G 2 M 7 - P - 0 1

¹ Depending on the insert

CABLE ASSEMBLY – RECEPTACLE

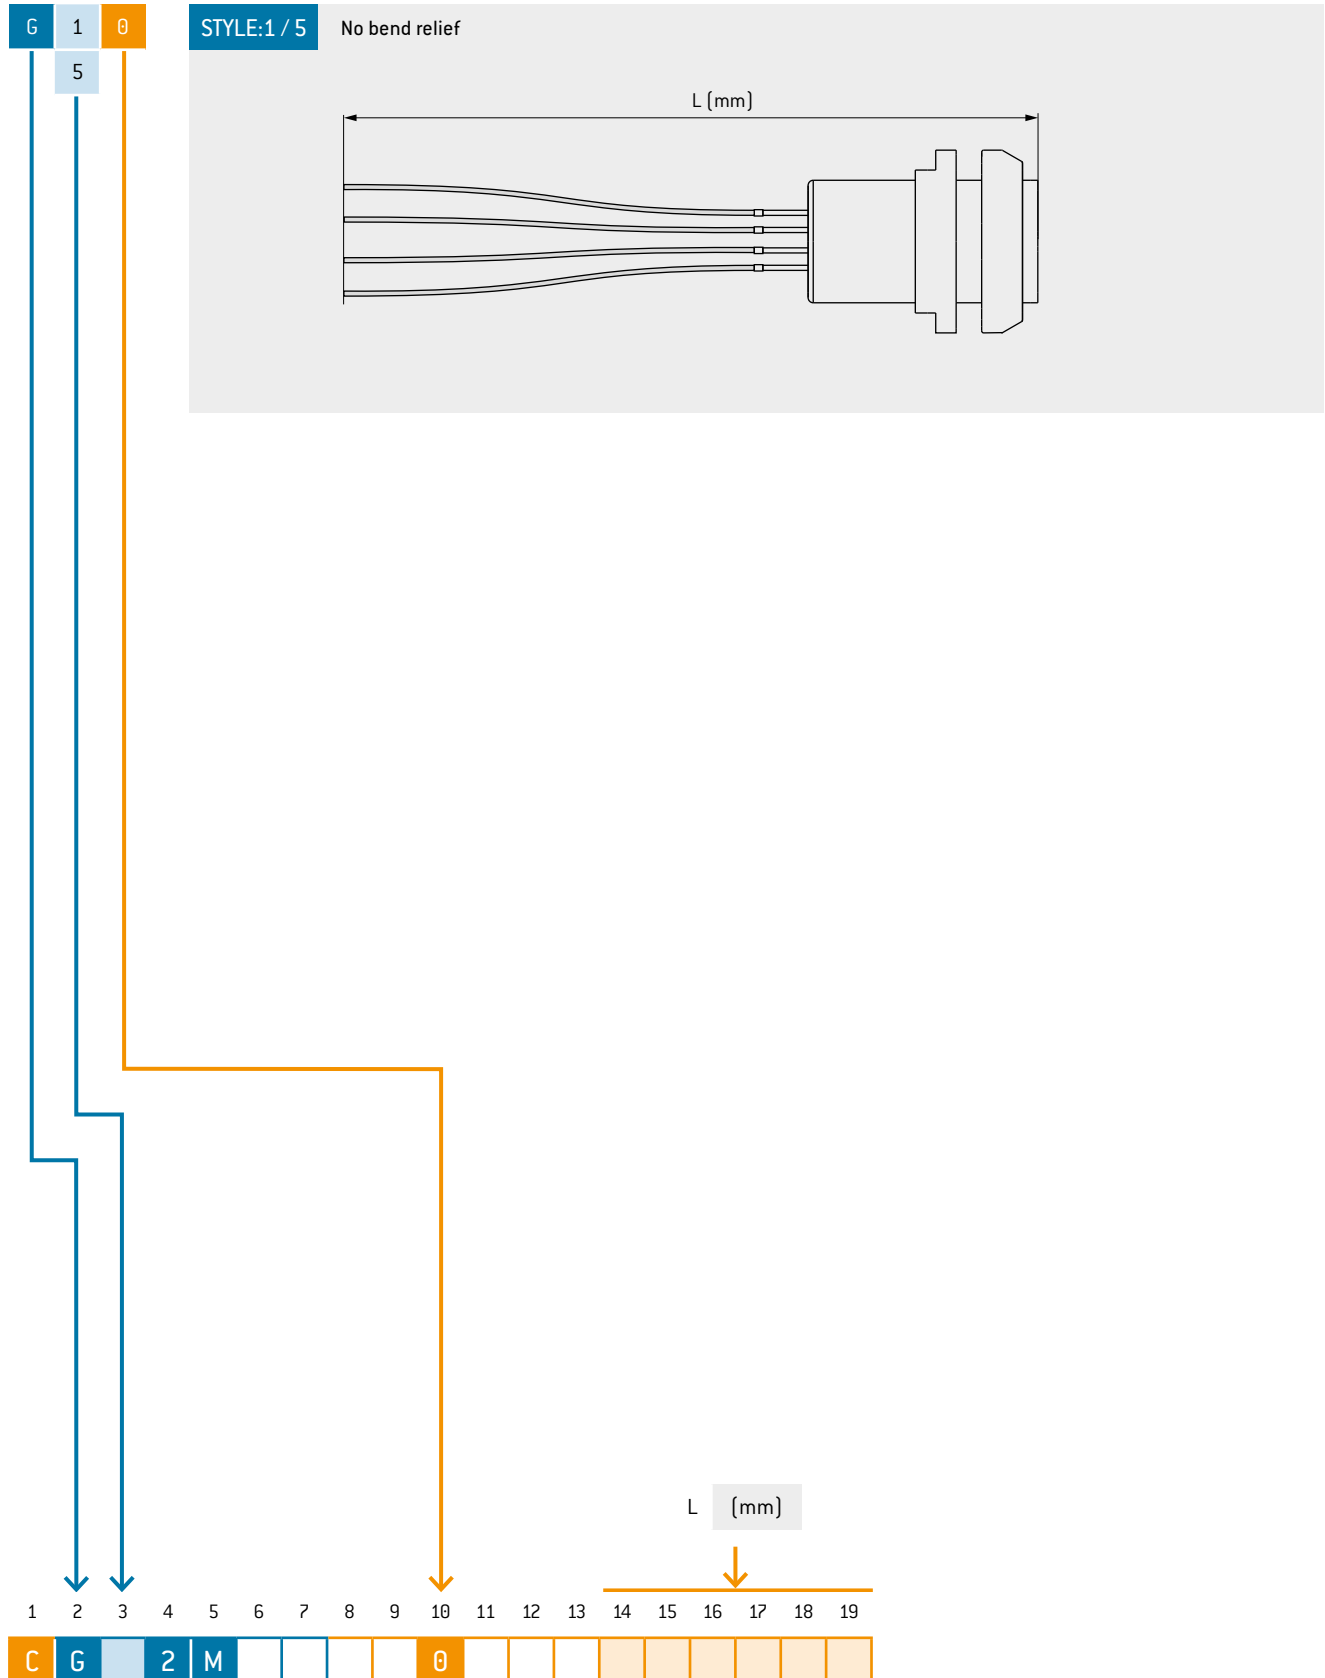

RECEPTACLE



G 4

STYLE: 4

For front panel installation

IP64

PANEL CUT-OUT

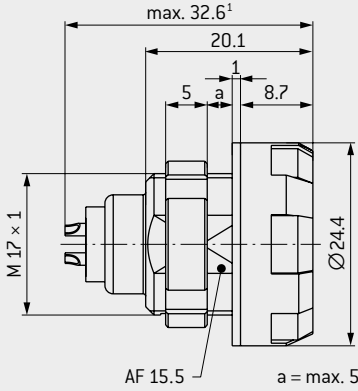

AF : 15.6 mm
Ø : 17.1 mm


TECHNICAL DATA

- Contact configuration see page 72 ff.
- Mechanical and color coding see page 70.
- Housing material and color see page 71.
- IP64 in mated condition with push-pull plug style S4
- IP50 with respect to the end device in unmated condition

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| G | 4 | 2 | M | | 7 | - | P | | | | | | | - | | 0 | | 1 |

¹ Depending on the insert

CABLE ASSEMBLY – RECEPTACLE

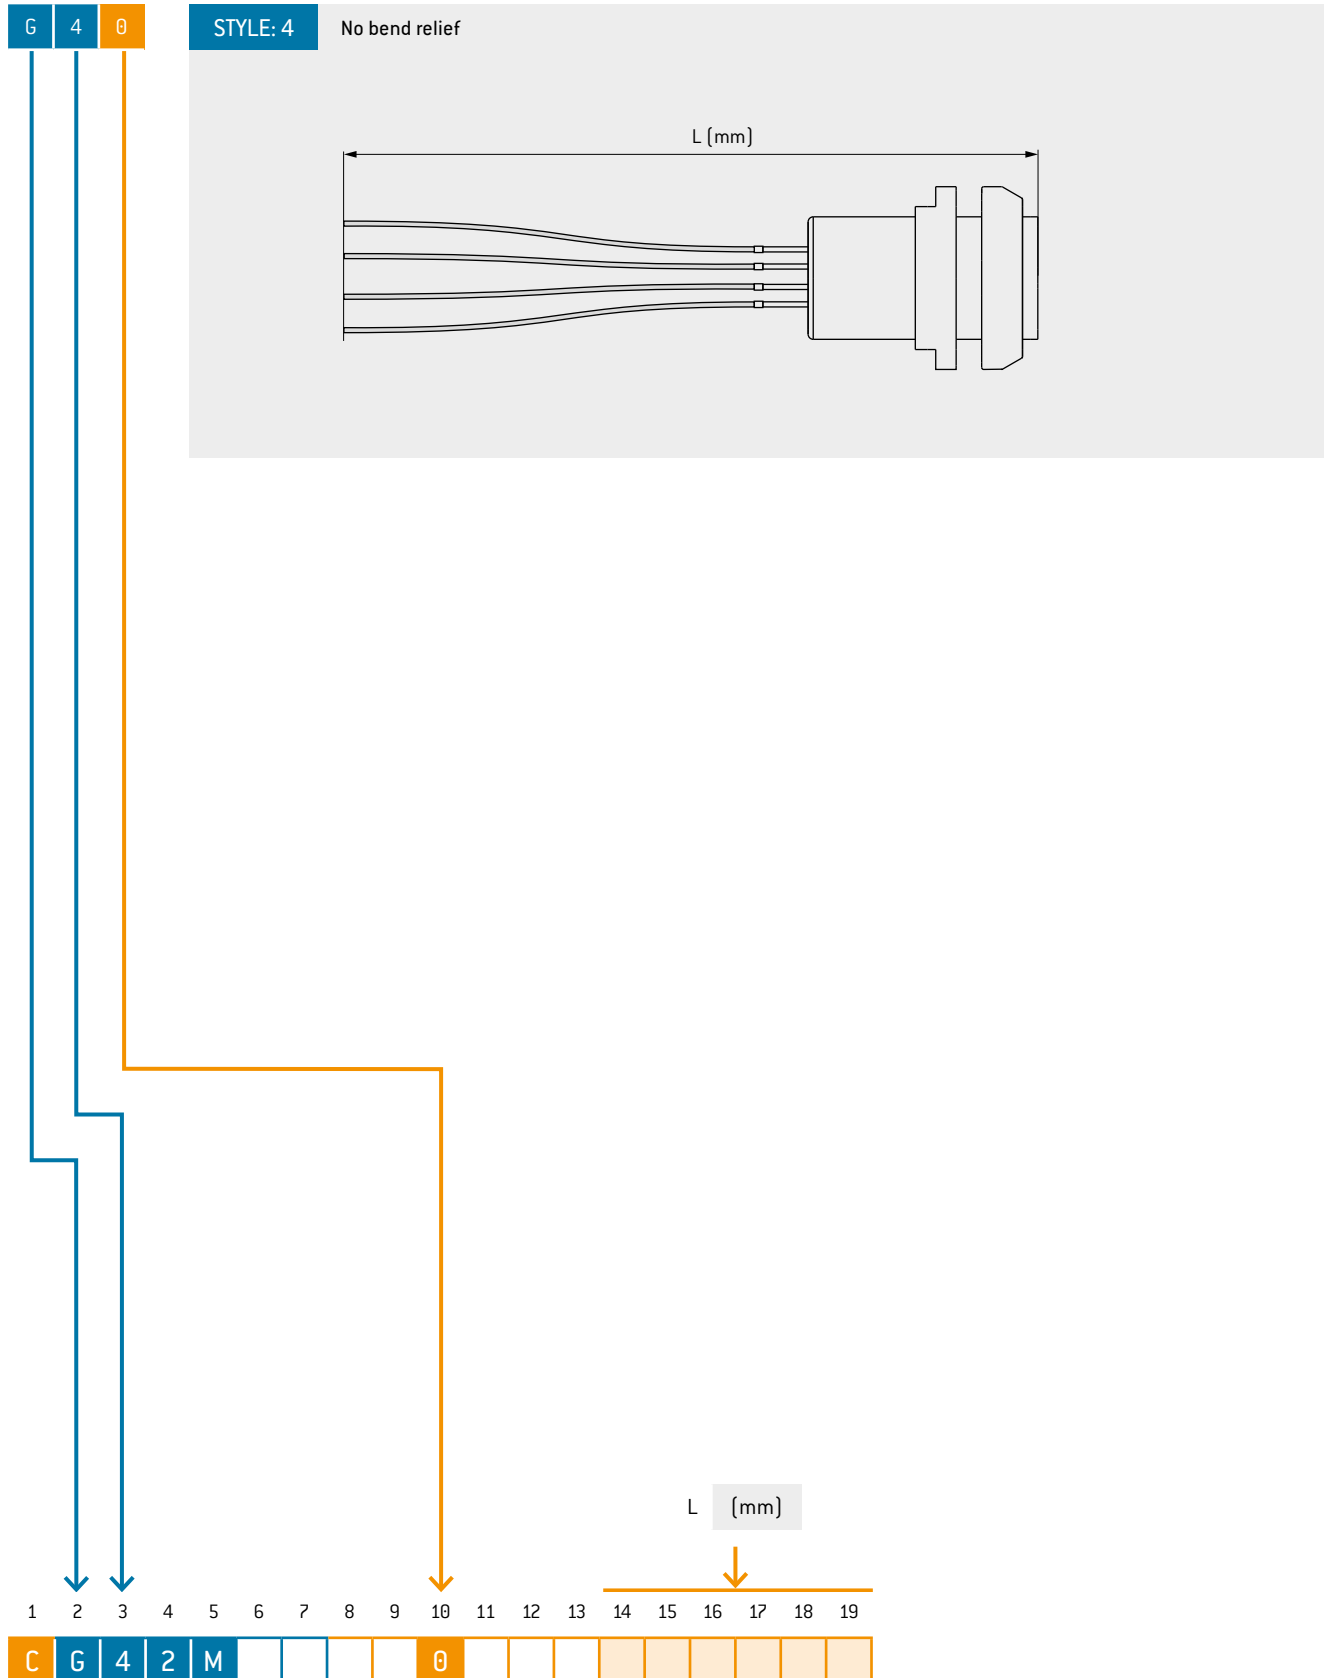

MECHANICAL CODING

| | Angle | Receptacle front view | Plastic | | |
|---|-------|-----------------------|----------------|-----------------|------------|
| | | | Push-pull plug | Break-away plug | Receptacle |
| C | 60° | | ● | ● | ● |
| E | 80° | | ● | ○ | ● |
| F | 90° | | ● | ○ | ● |

● Standard
○ On request

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| | | 2 | M | | | — | | | | | | | | — | | | | |

HOUSING MATERIAL AND COLOR CODING

For autoclaving, choose PEI for push-pull plugs or PSU for break-away plugs.
All receptacles and color codings are autoclavable.

| Color (similar classic RAL) | Material ¹ | Housing material | | | | Color coding | | |
|------------------------------------|-----------------------|-------------------|-------------------|------------|---|---------------|----------------------|---|
| | | Push-pull plug | Break-away plug | Receptacle | | Plug back nut | Receptacle front nut | |
| Gray (7045) | PSU | ● | ● autoclavable | ● | 7 | ● | ● | 7 |
| Gray (7045) | PEI | ● autoclavable | — | ● | 6 | ● | ● | 7 |
| Black (9004) | PSU | ● | ● autoclavable | ● | 8 | ● | ● | 8 |
| Black (9004) | PEI | ● autoclavable | — | ● | 5 | ● | ● | 8 |
| Red (3002) | PSU | ○ | ○ | ○ | 2 | ● | ● | 2 |
| White (9003) | PSU | ○ | ○ | ○ | 3 | ● | ● | 3 |
| Yellow (1016) | PSU | ○ | ○ | ○ | 4 | ● | ● | 4 |
| Green (6032) | PSU | ○ | ○ | ○ | 5 | ● | ● | 5 |
| Blue (5019) | PSU | ○ | ○ | ○ | 6 | ● | ● | 6 |
| Orange (2003) | PSU | ○ | ○ | ○ | 9 | ○ | ○ | 9 |

- Standard
- On request

For more detailed information on the topic of “autoclaving” see page 121 ff.

¹ For information about biocompatible materials, please contact sales@odu.de

² Back nuts for cable bend relief have to be ordered in the same color as the connector housing. Please order bend relief separately.

COLOR CODING
BEND RELIEF²
SEE PAGE 79

COLOR CODING PLUG
BACK NUT

HOUSING











COLOR CODING
FRONT NUT
RECEPTACLE


| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| | 2 | M | | | | — | | | | | | | | — | | | | |

CONTACT INSERT

For push-pull plugs and receptacles
For break-away plug A5, see page 74

All working voltages, unless otherwise stated: < 50 V AC / < 75 V DC
Please refer to [Technical Information](#) for further information
and also for cases where a higher voltage is needed.

| Number of contacts | | Contact type | | | Part number key insert | | | Contact diameter | Single contact nominal current ¹ | Nominal current insert | Clearance and creepage distance contact to contact | Test voltage ² | Termination | | Termination cross-section | | View on termination area | |
|--------------------|---|-----------------------------|--------|-----|---------------------------|----|------|---------------------|---------------------------------------------------|------------------------------|----------------------------------------------------------|------------------------------|-------------|----|------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----|
| | | Termination | Socket | Pin | | | | | | | | | mm | A | A | mm | EIA kV RMS | mm |
| 0 | 4 | Solder | L | M | P | N | 0 | 1.3 | 14.00 | 14.00 | 1.6 | 1.950 | 1.40 | 18 | 1.00 |  |  | |
| | | P | H | 0 | 1.10 | 20 | 0.50 | | | | | | | | | | | |
| | | Print straight ³ | 0 | — | P | 0 | 0 | | 0.70 | — | — | | | | | | | |
| | | Angled ³ | 0 | — | P | 0 | 0 | | 0.80 | — | — | | | | | | | |
| 1 | 2 | Solder | L | M | F | G | 0 | 0.7 | 7.50 | 3.75 | 0.8 | 1.050 | 0.85 | 22 | 0.38 |  |  | |
| | | F | D | 0 | 0.65 | 26 | 0.15 | | | | | | | | | | | |
| | | Print straight ³ | 0 | — | F | 0 | 0 | | 0.70 | — | — | | | | | | | |
| | | Angled ³ | 0 | — | F | 0 | 0 | | 0.60 | — | — | | | | | | | |
| 1 | 6 | Solder | L | M | F | G | 0 | 0.7 | 7.50 | 3.75 | 0.5 | 1.200 | 0.85 | 22 | 0.38 |  |  | |
| | | F | D | 0 | 0.65 | 26 | 0.15 | | | | | | | | | | | |
| | | Print straight ³ | 0 | — | F | 0 | 0 | | 0.70 | — | — | | | | | | | |
| | | Angled ³ | 0 | — | F | 0 | 0 | | 0.60 | — | — | | | | | | | |
| 1 | 9 | Solder | L | M | F | G | 0 | 0.7 | 7.50 | 3.40 | 0.5 | 1.050 | 0.85 | 22 | 0.38 |  |  | |
| | | F | D | 0 | 0.65 | 26 | 0.15 | | | | | | | | | | | |
| | | Print straight ³ | 0 | — | F | 0 | 0 | | 0.70 | — | — | | | | | | | |
| | | Angled ³ | 0 | — | F | 0 | 0 | | 0.60 | — | — | | | | | | | |
| 2 | 6 | Solder | L | M | C | C | 0 | 0.5 | 4.00 | 1.60 | 0.5 | 1.000 | 0.45 | 28 | 0.08 |  |  | |
| | | Print straight ³ | 0 | — | C | 0 | 0 | | | | | | 0.50 | — | — | | | |
| | | Angled ³ | 0 | — | C | 0 | 0 | | | | | | 0.50 | — | — | | | |

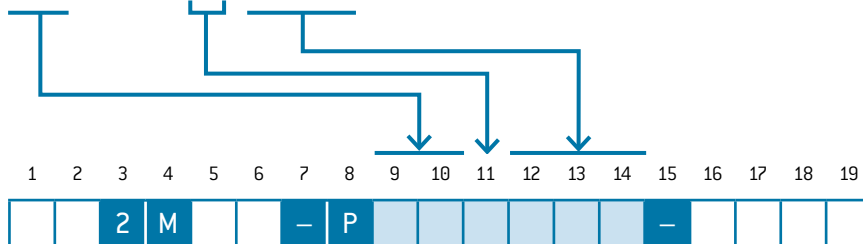

The socket is installed in the receptacle, the pin is installed in the plug.
Reversed gender variants on request.
Values in the table refer to the connector only.
Cable specification see page 19.

¹ Derating factor, see page 116.

² Acc. to EIA-364-20F:2019-02, further information on voltage rating on page 110.

³ PCB layouts, see page 76; print termination only available for receptacle style 5

SPECIAL-CONTACT INSERT

For main and high-voltage

| Insulator material ⁷ | Number of contacts ⁵ | | | Contact type | | | Part number key insert | | Contact diameter mm | Single contact nominal current ¹ A | Nominal current insert A | Clearance and creepage distance contact to contact | | Contact-to-contact voltage | | | Termination diameter mm | Termination cross-section | | View on termination area | | | | | | | | |
|---------------------------------|---------------------------------|---|--|--------------|----------------|-----|------------------------|---|------------------------|--------------------------------------------------|-----------------------------|----------------------------------------------------|------------|----------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------|----------------------------|---------------------------|-----------------|--------------------------|--------------|--|----------------------|------|-----|--------------------|--------------------|-------|
| | | | | Termination | Socket | Pin | | | | | | mated mm | unmated mm | Working voltage ^{2, 4} IEC V RMS | mated ³ Test voltage ³ IEC kV RMS | unmated ³ Test voltage ³ IEC kV RMS | | AWG | mm ² | Pin piece | Socket piece | | | | | | | |
| P | 0 | 3 | | Solder | L | M | T | S | 0 | 1 × 2 (first mate last break) | 22.5 | 22.5 | 4.7 | 2.0 | 230 | 3.500 | 2.100 | 2.4 | 14 | 2.5 | | | | | | | | |
| T | 0 | 5 | | Solder | L ⁸ | | P | Q | 9 | 1 × 1.3 (first mate last break) | 16.0 | 12.0 | 9.9 | 3.2 | 600 ⁶ | 3.500 ⁶ | 2.100 | 1.9 | 16 | 1.5 | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | 2 × 1.3 (lagging) | 13.6 | 3.2 | 1.000 ⁶ | 3.500 ⁶ | 2.100 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Values in the table refer to the connector only. Cable specification see page 19.

¹ Derating factor, see page 116.
² In the case of the pin piece, voltage may only be applied in mated condition.
³ IEC 60664-1:2020 [VDE 0110-1:2022-07]: Overvoltage category III (in three phase 230 V / 400 V AC supply systems. Rated impulse voltage 4.000kV) (p. 111)

⁴ IEC 60664-1:2020 [VDE 0110-1:

2022-07]: Pollution degree 3 (p. 111)

⁵ Normal and reversed gender is possible.

⁶ Voltage may only be applied to fully assembled and potted connectors in mated condition.

⁷ P: PEEK / T: PBT (not autoclavable)

⁸ 4 x socket / 1 x pin

⁹ 1 x socket / 4 x pin

CABLE TYPE

| Number of contacts | | Contact type | | | Single wires ¹ | | | Cable PVC Black unshielded | | | | Cable PVC White unshielded | | | |
|--------------------|---|--------------|--------|-----|---------------------------|------------------|-----|----------------------------|-------------------------|------------------|-----|----------------------------|-------------------------|------------------|-----|
| | | Termination | Socket | Pin | Count number | Wire diameter mm | AWG | Count number | Outer cable diameter mm | Wire diameter mm | AWG | Count number | Outer cable diameter mm | Wire diameter mm | AWG |
| 0 | 4 | Solder | L | – | ZP | 2.15 ± 0.10 | 18 | – | | | | ○ | | | |
| | | | – | M | | n.a. | | ZO | 6.10 ± 0.20 | 1.80 ± 0.20 | 18 | | | | |
| | | Solder | L | – | ZN | 1.50 ± 0.05 | 20 | – | | | | ○ | | | |
| | | | – | M | | n.a. | | ZM | 5.40 ± 0.20 | 1.50 ± 0.20 | 20 | | | | |
| 1 | 2 | Solder | L | – | ZL | 1.30 ± 0.05 | 22 | – | | | | ○ | | | |
| | | | – | M | | n.a. | | ZK | 7.20 ± 0.20 | 1.30 ± 0.20 | 22 | | | | |
| | | Solder | L | – | ZH | 1.00 ± 0.05 | 26 | – | | | | ○ | | | |
| | | | – | M | | n.a. | | ZI | 5.90 ± 0.20 | 1.00 ± 0.20 | 26 | | | | |
| 1 | 6 | Solder | L | – | ZL | 1.30 ± 0.05 | 22 | ○ | | | | ○ | | | |
| | | | – | M | | n.a. | | – | | | | ○ | | | |
| | | Solder | L | – | ZH | 1.00 ± 0.05 | 26 | – | | | | ○ | | | |
| | | | – | M | | n.a. | | ZG | 6.50 ± 0.20 | 1.00 ± 0.20 | 26 | | | | |
| 1 | 9 | Solder | L | – | ZL | 1.30 ± 0.05 | 22 | ○ | | | | ○ | | | |
| | | | – | M | | n.a. | | – | | | | ○ | | | |
| | | Solder | L | – | ZH | 1.00 ± 0.05 | 26 | – | | | | ○ | | | |
| | | | – | M | | n.a. | | ZG | 7.10 ± 0.25 | 1.00 ± 0.20 | 26 | | | | |
| 2 | 6 | Solder | L | – | ZT | 0.90 ± 0.05 | 28 | – | | | | ○ | | | |
| | | | – | M | | n.a. | | ZS | 7.40 ± 0.25 | 0.90 ± 0.20 | 28 | ○ | | | |

○ On request

¹ For assembly with receptacle styles without bend relief only

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| C | | | 2 | M | | | | | | | | | | | | | | |

| Number of contacts | | Contact type | | | Single wires | | | Cable PVC Black unshielded | | | | Cable PVC White unshielded | | | |
|--------------------|---|--------------|--------|-----|--------------|------------------|-----|----------------------------|----------------------------|------------------|-----|----------------------------|----------------------------|------------------|-----|
| | | Termination | Socket | Pin | Count number | Wire diameter mm | AWG | Count number | Outer cable diameter in mm | Wire diameter mm | AWG | Count number | Outer cable diameter in mm | Wire diameter mm | AWG |
| 0 | 3 | Solder | L | – | ○ | | | ○ | | | | ○ | | | |
| | | | – | M | | | | | | | | | | | |
| 0 | 5 | Solder | L | – | ○ | | | ○ | | | | ○ | | | |
| | | | – | M | | | | | | | | | | | |

○ On request

CONTACT INSERT STYLE A5




All working voltages, unless otherwise stated: < 50 V AC / < 75 V DC
Please refer to [Technical Information](#) for further information
and also for cases where a higher voltage is needed.

| Number of contacts | | Contact type | | Part number key insert | | | Contact diameter | Single contact nominal current ¹ | Nominal current insert | Clearance and creepage distance contact to contact | Test voltage ² | Termination diameter | Termination cross-section | | View on termination area |
|--------------------|---|--------------|-----|------------------------|---|---|------------------|---------------------------------------------|------------------------|----------------------------------------------------|---------------------------|----------------------|---------------------------|------|-------------------------------------------------------------------------------------|
| | | Termination | Pin | | | | | | | | | | AWG | mm² | |
| | | | | | | | mm | A | A | mm | EIA kV RMS | mm | | | Pin piece |
| 1 | 6 | Solder | M | F | G | 0 | 0.7 | 7.5 | 3.8 | 0.5 | 1.200 | 0.85 | 22 | 0.38 |  |
| 2 | 6 | | | C | D | 0 | 0.5 | 5.0 | 2.0 | 0.4 | 1.000 | 0.65 | 26 | 0.15 |  |

¹ Derating factor, see page 116.

² Acc. to EIA-364-20F:2019-02, further information on voltage rating on page 110.

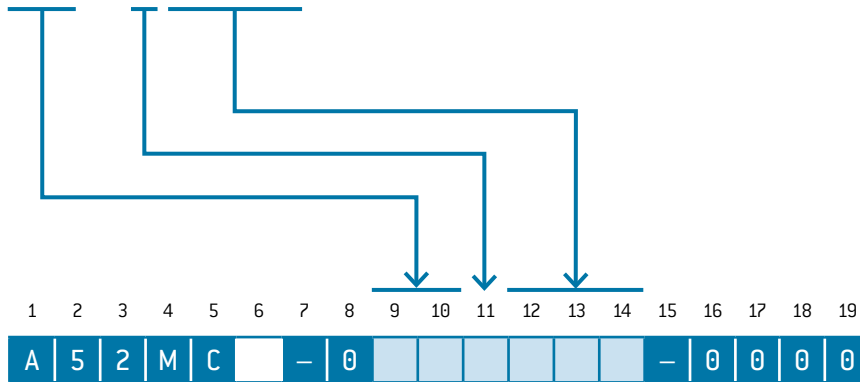

SPECIAL-CONTACT INSERT STYLE A5

Avoidance of "hot plugging" due to lagging contacts

CAUTION: Style A5 (5-pos.) mateable with the following receptacles:
G12MC7-P05LMM9-0001
G42MC7-P05LMM9-00071
G52MC7-P05LMM9-00002
Other variants upon request.

| Number of contacts | | Contact type | | Part number key insert | | | Contact diameter | Single contact nominal current | Nominal current insert | Clearance and creepage distance contact to contact | | Contact-to-contact voltage | | | Termination diameter | Termination cross-section | | View on termination area |
|--------------------|----------------|--------------|-----|------------------------|---|---|-----------------------------------------------|--------------------------------|------------------------|----------------------------------------------------|------------|--------------------------------------------|--------------------------------------------|----------------------------------------------|----------------------|---------------------------|-----|--------------------------|
| | | Termination | Pin | | | | | | | mated mm | unmated mm | Working voltage ^{2,3,4} IEC V RMS | mated Test voltage ³ IEC kV RMS | unmated Test voltage ³ IEC kV RMS | | mm | AWG | |
| 0 | 5 ⁵ | Solder | M | M | M | 9 | 1 × 1.3 (first mate last break) 2 × 1.3 | 16.0 | 12.0 | 8.2 | 1.8 | 320 ⁵ | 1.250 | 1.250 | 1.85 | 16 | 1.5 | |
| | | | | | | | 2 × 0.9 lagging signal contacts | 9.0 | 6.5 | 8.2 | 1.8 | | 1.250 | 1.250 | 1.10 | 20 | 0.5 | |


¹ Derating factor, see page 116.

² In the case of the pin piece, voltage may only be applied in mated condition.

³ IEC 60664-1:2020 (VDE 0110-1:2022-07): Overvoltage category III [in three phase 230V/400V AC supply systems. Rated impulse voltage 4.000kV] (p. 111)

⁴ IEC 60664-1:2020 (VDE 0110-1:2022-07): Pollution degree 3 (p. 111)

⁵ Voltage may only be applied to fully assembled and potted connectors in mated condition.

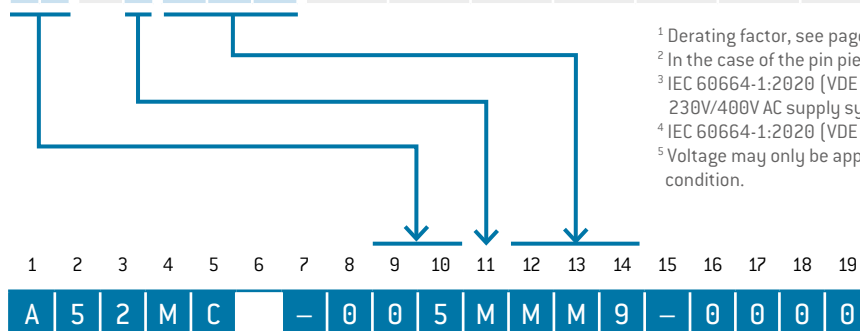

CABLE TYPE

| Number of contacts | | Contact type | | Cable PVC Black unshielded | | | | Cable PVC White unshielded | | | |
|--------------------|---|--------------|-----|----------------------------|-------------------------|------------------|-----|----------------------------|-------------------------|------------------|-----|
| | | Termination | Pin | Count number | Outer cable diameter mm | Wire diameter mm | AWG | Count number | Outer cable diameter mm | Wire diameter mm | AWG |
| 1 | 6 | Solder | M | ○ | | | | ○ | | | |
| 2 | 6 | Solder | M | ZU | 7.40 ± 0.25 | 0.90 ± 0.20 | 28 | ○ | | | |

○ On request











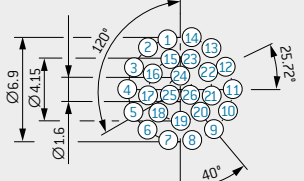
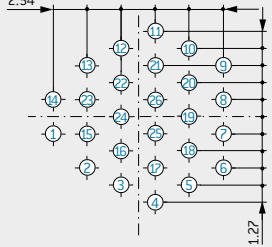
| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| C | A | 5 | 2 | M | C | | | | | | | | | | | | | |

| Number of contacts | | Contact type | | Cable PVC Black unshielded | | | | Cable PVC White unshielded | | | |
|--------------------|---|--------------|-----|----------------------------|----------------------------|---------------|-----|----------------------------|----------------------------|---------------|-----|
| | | Termination | Pin | Count number | Outer cable diameter in mm | Wire diameter | AWG | Count number | Outer cable diameter in mm | Wire diameter | AWG |
| 0 | 5 | Solder | M | ○ | | | | ○ | | | |

○ On request

PCB LAYOUT

For PCB contacts [Size 2]

| | Straight | 90° right-angled |
|-------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| |  |  |
| | Contact borehole: $\varnothing 0.8$ mm | Contact borehole: $\varnothing 0.9$ mm |
| 4 contacts |  |  |
| | Contact borehole: $\varnothing 0.8$ mm | Contact borehole: $\varnothing 0.7$ mm |
| 12 contacts |  |  |
| | Contact borehole: $\varnothing 0.8$ mm | |
| 16 contacts |  |  |
| | Contact borehole: $\varnothing 0.8$ mm | |
| 19 contacts |  |  |
| | Contact borehole: $\varnothing 0.6$ mm | Contact borehole: $\varnothing 0.6$ mm |
| 26 contacts |  |  |

○ On request

RIGHT-ANGLED PCB CONTACT IN THE RECEPTACLE

A

RIGHT-ANGLED PCB CONTACT

For style G5



IP50

| Contact diameter | Termination diameter |
|------------------|----------------------|
| mm | mm |
| 0.5 | 0.5 |
| 0.7 | 0.6 |
| 1.3 | 0.8 |

12345678910111213141516171819

2

M

7

-

P

-

A


0

1

CABLE COLLET SYSTEM

For strain relief of push-pull plugs

| | | Cable diameter | Material |
|---|---|----------------|-----------|
| | | mm | |
| 5 | 4 | > 3.2 – 5.4 | PSU / PEI |
| 7 | 4 | > 5.4 – 7.4 | |
| 9 | 2 | > 7.4 – 9.2 | |

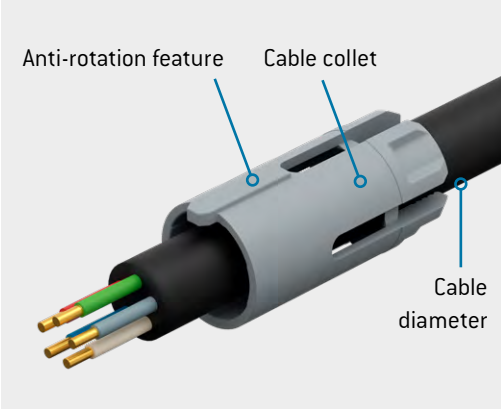


| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| | | 2 | M | | 7 | – | P | | | | | | | – | | | | |

CABLE BEND RELIEF

For push-pull plug style 4

SILICONE CABLE BEND RELIEF

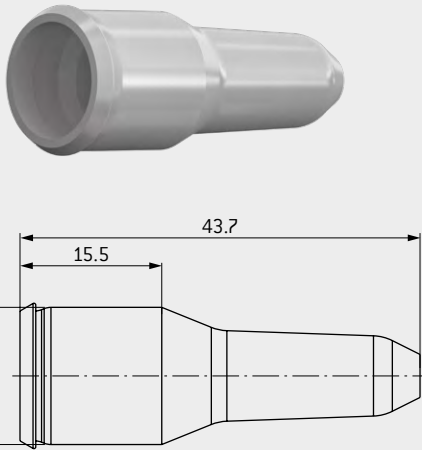

| Part number | Cable diameter | |
|----------------------|----------------|------|
| | min. | max. |
| KM2.023.____.965.032 | 3.2 | 4.7 |
| KM2.023.____.965.047 | 4.7 | 6.2 |
| KM2.023.____.965.062 | 6.2 | 7.7 |
| KM2.023.____.965.077 | 7.7 | 9.2 |

| Color code | Color (Similar classic RAL) |
|------------|-----------------------------|
| 207 | Gray (7000) |
| 208 | Black (9005) |


COLOR CODE FOR CABLE ASSEMBLY (SIMILAR CLASSIC RAL)

| Receptacle style 1 | | Silicone bend relief | | TPU overmolding | | Push-pull plug back nut style 1 Plastic receptacle front nut style 4, 5 | |
|--------------------|----------------|----------------------|--------------|-----------------|--------------|----------------------------------------------------------------------------|---------------|
| 0 | not applicable | 7 | Gray (7000) | 7 | Gray (7045) | 2 | Red (3002) |
| | | 8 | Black (9005) | 8 | Black (9005) | 3 | White (9003) |
| | | | | | | 4 | Yellow (1016) |
| | | | | | | 5 | Green (6032) |
| | | | | | | 6 | Blue (5019) |
| | | | | | | 7 | Gray (7045) |
| | | | | | | 8 | Black (9004) |

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

C 2 M

STRAIGHT CABLE OUTLET BACKSHELL FOR BREAK-AWAY PLUG

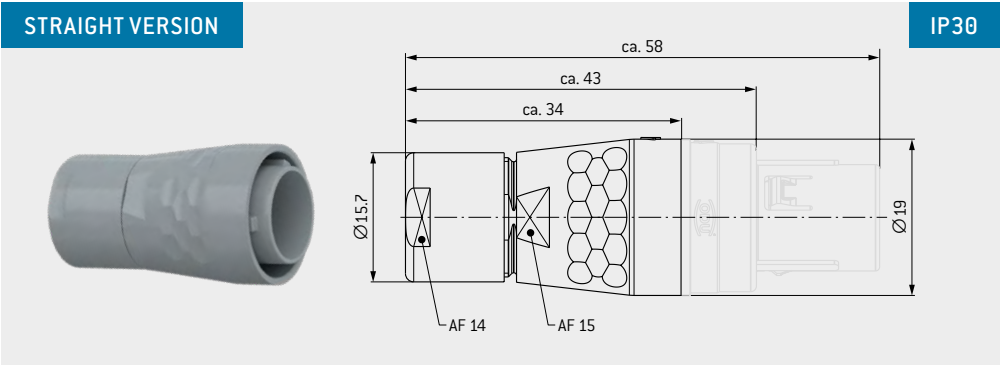


Straight version includes cable collet system for strain relief.

| Part number | Material | Cable diameter mm | Color code | Color (Similar classic RAL) |
|--------------------|---------------------------|----------------------|------------|-----------------------------|
| 026.KM2.129.9__045 | PSU / PEI ¹ | > 3.1 – 4.5 | 07 | Gray (7045) |
| 026.KM2.129.9__060 | | > 4.5 – 6.0 | 08 | Black (9004) |
| 026.KM2.129.9__075 | | > 6.0 – 7.5 | | |
| 026.KM2.129.9__090 | | > 7.5 – 9.0 | | |

¹ Housing and cable clamp PSU, back nut PEI


TRANSPORTATION CAP

Applicable to all straight plugs as well as break-away plugs

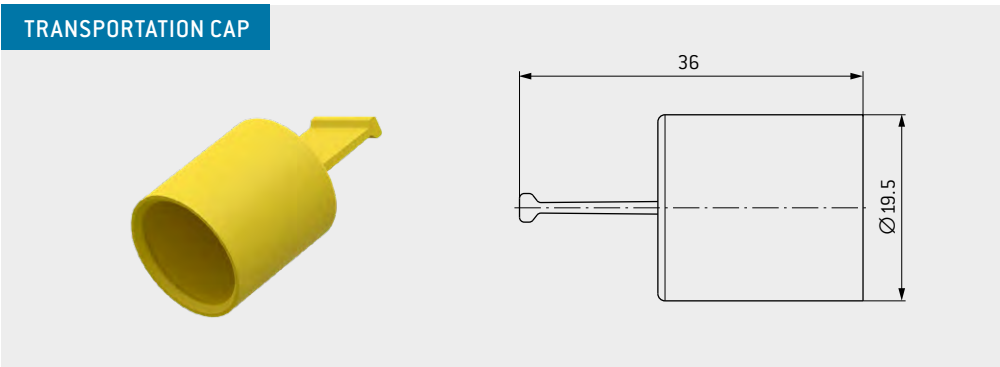


| Part number | Material | Color (similar classic RAL) |
|---------------------|----------|-----------------------------|
| 922.000.002.000.079 | TPE | Yellow (1016) |



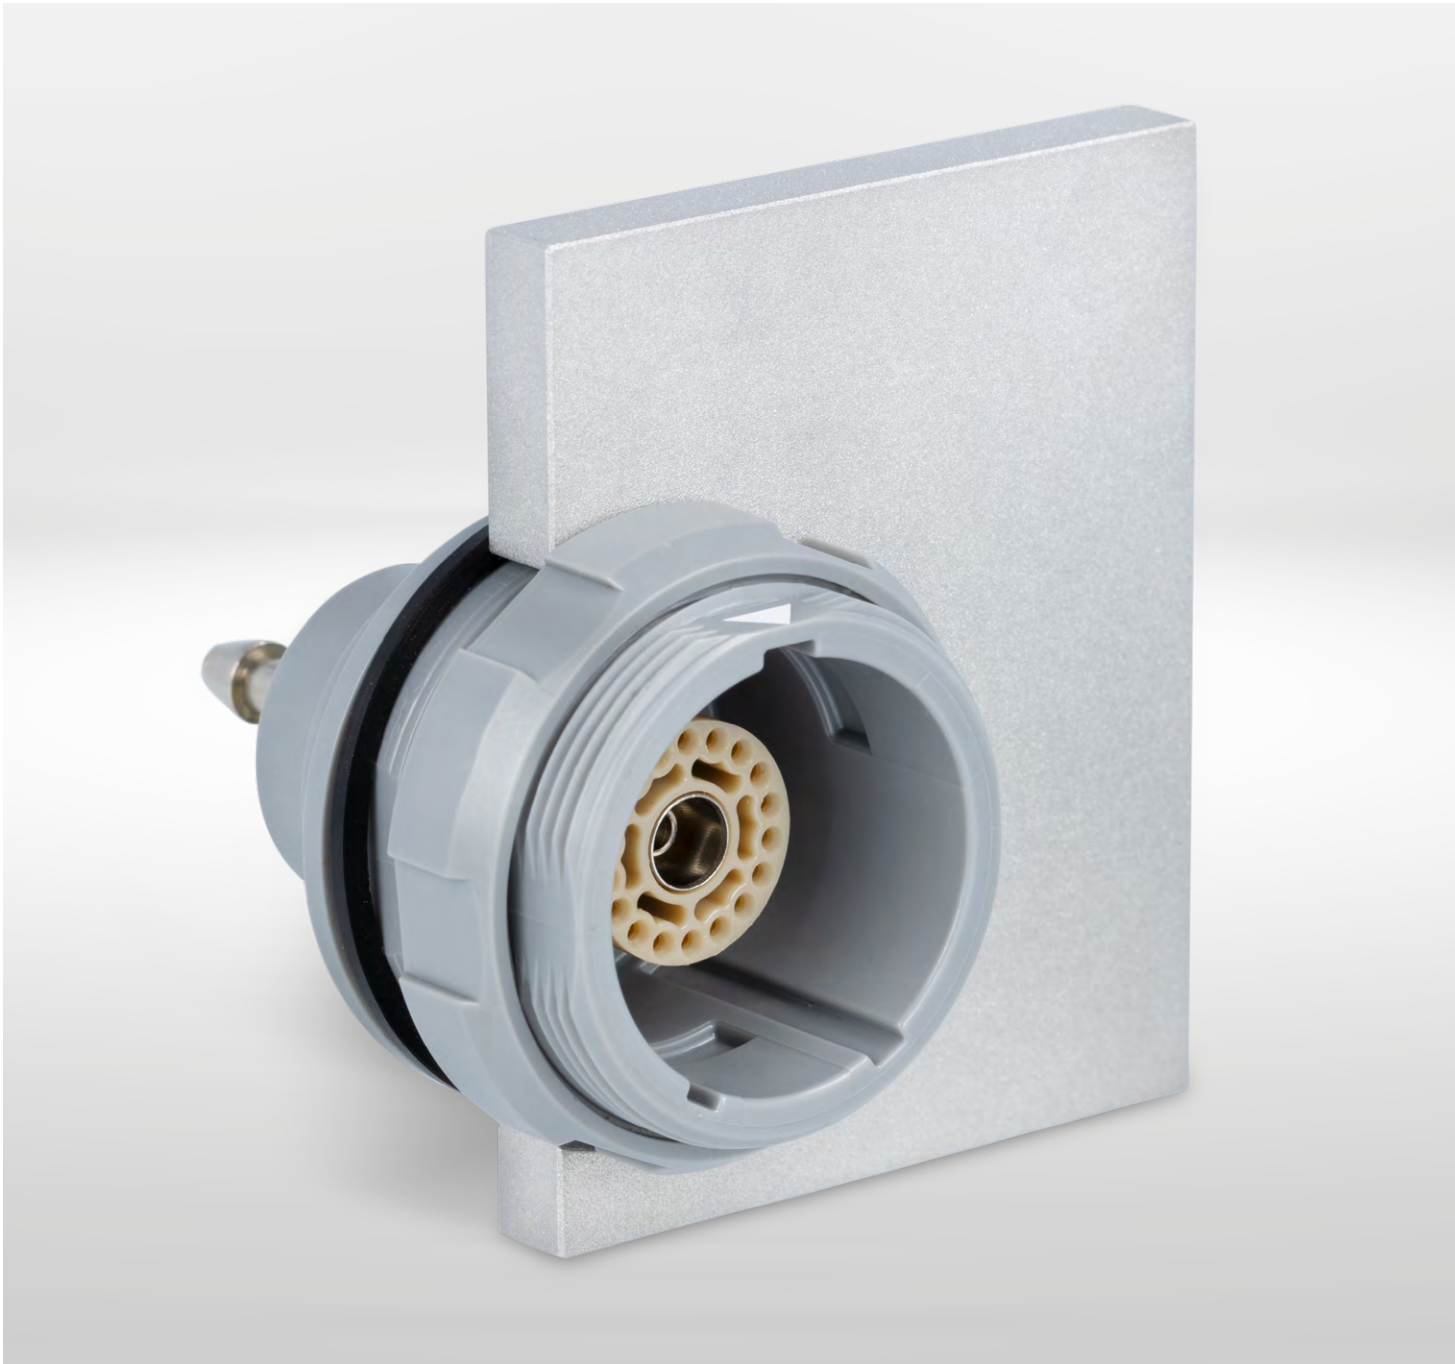

ODU MED-SNAP®

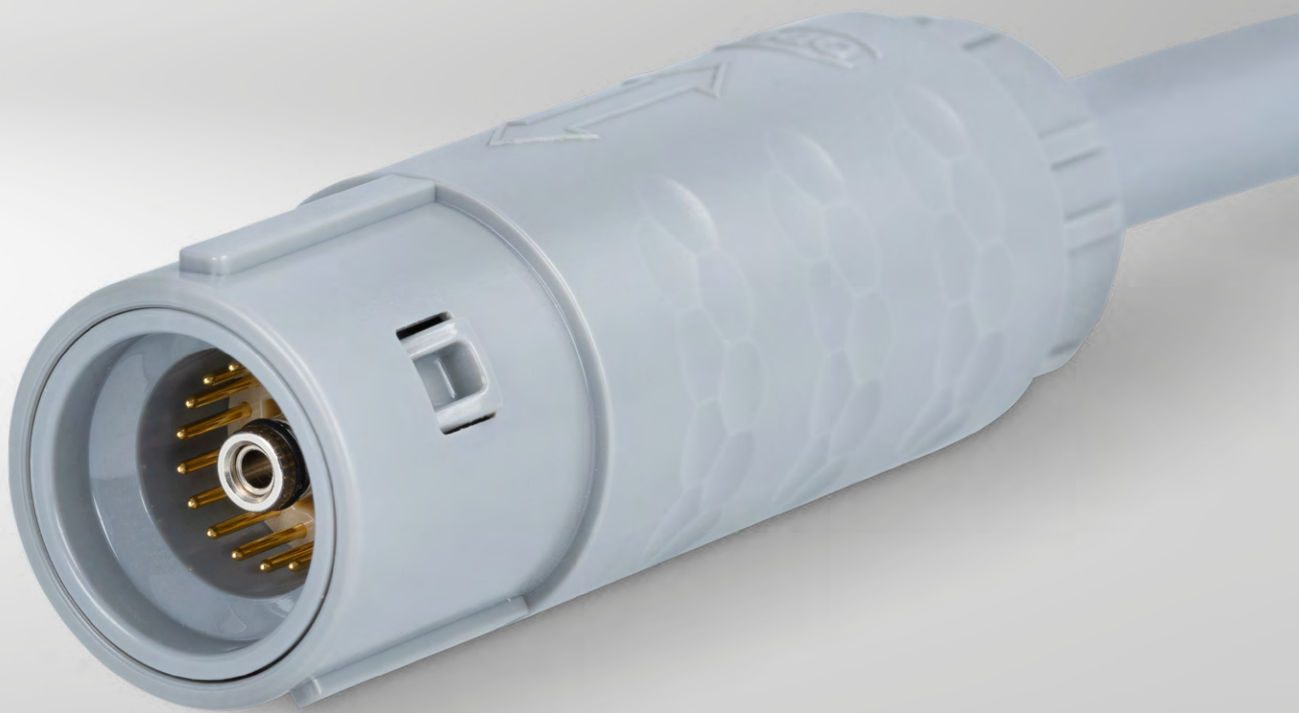

ODU MEDI-SNAP® PLASTIC HOUSING SIZE 3.5

| | |
|---------------------------------------------------------|--------------------|
| ODU MEDI-SNAP® Plastic housing size 3.5 – Summary | 84 |
| Plug | 86 |
| Receptacle | 87 |
| Mechanical coding | 90 |
| Housing material and color coding | 91 |
| Contact insert | 92 |
| Can't find the perfect solution? | 93 |
| Cable collet system | 94 |
| Accessories | 95 |

ODU MEDI-SNAP® PLASTIC HOUSING SIZE 3.5 – SUMMARY

The ODU MEDI-SNAP® with plastic housing in size 3.5 is coded by pin and groove. These circular connectors can have a variety of configurations: numerous styles of connectors and receptacles as well as various termination types, contact inserts and color codings.

- Coding over pin and groove
- 8 color codings
- 3 mechanical codings
- 19 / 41 contacts
- 2 termination types
- Contacts for solder PCB termination
- A selection of numerous connector and receptacle styles
- IP50 and IP68 available in mated condition
- Up to 5,000 mating cycles
- Hybrid inserts including signals and media feedthrough

| STRAIGHT PLUG – PUSH-PULL | | P. 86 | 5,000 mating cycles |
|---------------------------|-------------------------------------------------------------------------------------|-------|------------------------|
| IP50 |  | S | 1 |
| IP68 |  | S | 3 |
| IP50 |  | S | 2 |
| IP68 |  | S | 4 |

PL Plastic

For assembly instructions, please refer to our website: www.odu-connectors.com/downloads/assembly-instructions

| RECEPTACLE | | P. 87 | 5,000 mating cycles |
|----------------------------------------------------------|-------------------------------------------------------------------------------------|-------|------------------------|
| IEC 60601-1: 2 MOPP ¹ and 2 MOPP ¹ | | | |
| IP50 |  | G | 1 |
| IP50 |  | G | 8 |
| IP68 |  | G | E |
| IP68 |  | G | C |
| IP68 |  | G | A ² |
| IP68 |  | G | D ² |

¹As per IEC 60601-1:2012 (VDE 0750-1:2013-12).
Max. working voltage of the medical device 250 V AC (degree of pollution 2).

²IP68 in unmated condition with respect to the device

STRAIGHT PLUG


Push-pull styles

S110


S24S

STYLE: 1 / 3

With standard back nut




PL

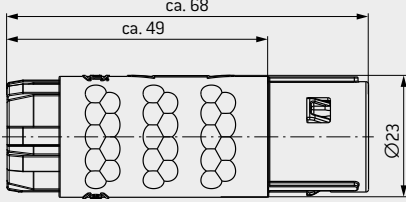


S1: IP50 / S3: IP68

STYLE: 2 / 4

With back nut¹ for cable bend relief²



PL

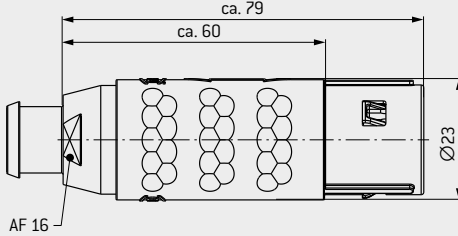

S2: IP50 / S4: IP68

TECHNICAL DATA

- Contact configuration see page 92 ff.
- Mechanical coding see page 90.
- Cable collet diameter see page 94.
- Housing material and color see page 91.
- Accessories see page 95 ff.
- IP rate in mated condition and depending on the mating receptacle

Size (3.5)

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

S

B

M

-

P

-

-

-

-

-

-

-

-

-

-

-

-

-

-

¹ Back nuts for cable bend reliefs have to be ordered in the same color as the connector housing. The color coding is based on the cable bend relief. ² Cable bend reliefs have to be ordered separately (see page 95).

RECEPTACLE


G 1

STYLE: 1


For front panel installation

IP50

PL

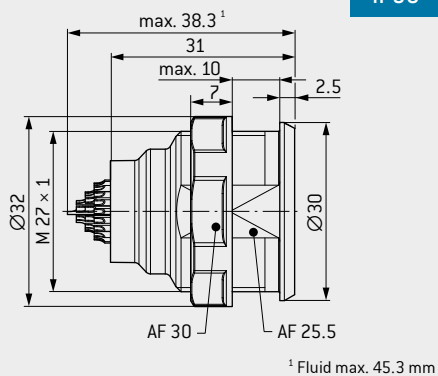

PANEL CUT-OUT


AF : 25.6 mm
Ø : 27.1 mm


8

STYLE: 8


For rear panel installation

IP50

PL

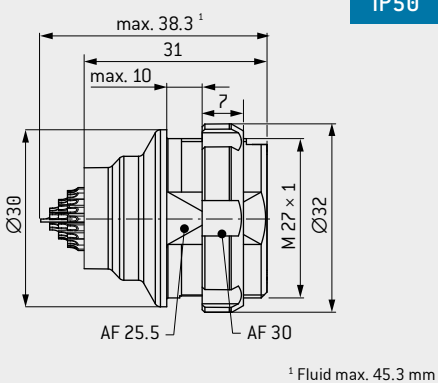

PANEL CUT-OUT


AF : 25.6 mm
Ø : 27.1 mm

TECHNICAL DATA

- Contact configuration see page 92 ff.
- Mechanical coding see page 90.
- Housing material and color see page 91.
- Style 8 color coding via front nut
- Style 1 available in Black or Gray (further colors on request)
- IP50 in mated condition
- IP50 with respect to the end device in unmated condition

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

G B M - P - 0 0 1

Style 1, default "0"

RECEPTACLE


G

E

C


STYLE: E

For front panel installation




PL

IP68

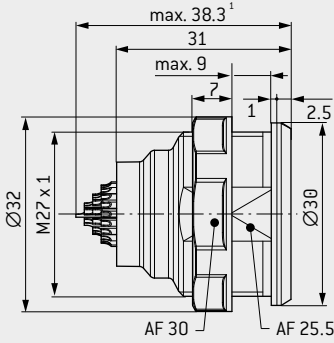


PANEL CUT-OUT



AF : 25.6 mm
Ø : 27.1 mm


STYLE: C

For rear panel installation




PL

IP68

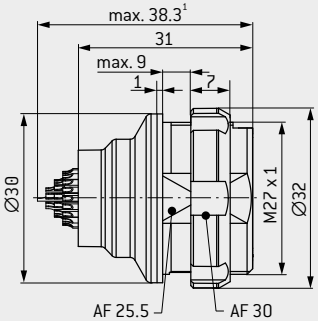

PANEL CUT-OUT



AF : 25.6 mm
Ø : 27.1 mm

TECHNICAL DATA

- Contact configuration see page 92 ff.
- Mechanical color coding see page 90.
- Housing material and color see page 91.
- Style C color coding via front nut
- Style E available in Black or Gray (further colors on request)
- IP68 in mated condition with push-pull plug style S3 or S4
- IP50 with respect to the end device in unmated condition

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

Size (3.5)

Style E, default "0"

G

B

M

-

P

-

0

0

1

88

RECEPTACLE


G A

STYLE: A


For front panel installation

IP68

PL

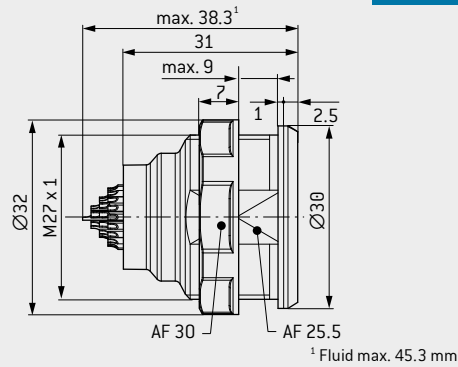

PANEL CUT-OUT



AF : 25.6 mm
Ø : 27.1 mm



D

STYLE: D


For rear panel installation

IP68

PL

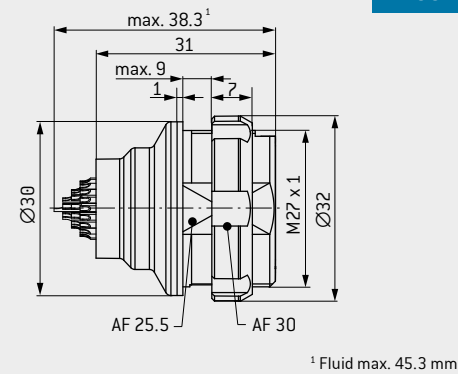

PANEL CUT-OUT



AF : 25.6 mm
Ø : 27.1 mm

TECHNICAL DATA

- Contact configuration see page 92 ff.
- Mechanical coding see page 90.
- Housing material and color see page 91.
- Style D color coding via front nut
- Style A available in Black or Gray (further colors on request)
- IP68 in mated condition with push-pull plug style S3 or S4
- IP68 with respect to the end device in unmated condition




1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

Size (3.5)

Style A, default "0"

G B M - P - 0 0 1

MECHANICAL CODING

| | Angle | Receptacle front view | Plastic | |
|---|-------|-----------------------------------------------------------------------------------|----------------|------------|
| | | | Push-pull plug | Receptacle |
| F | 90° |  | ● | ● |
| K | — |  | ● | ● |
| L | — |  | ● | ● |

● Standard
Further codings on request

Size (3.5)

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| | | B | M | | | — | | | | | | | | — | | | | |

HOUSING MATERIAL AND COLOR CODING



All receptacles and color codings are autoclavable.

| Color (similar classic RAL) | Material ¹ | Housing material | | | Color coding | | |
|------------------------------------|-----------------------|-------------------|------------|---|---------------|----------------------|---|
| | | Push-pull plug | Receptacle | | Plug back nut | Receptacle front nut | |
| Gray (7045) | PEI | ● autoclavable | ● | 6 | ● | ● | 7 |
| Black (9004) | PEI | ● autoclavable | ● | 5 | ● | ● | 8 |
| Red (3002) | PSU | ○ | ○ | 2 | ● | ● | 2 |
| White (9003) | PSU | ○ | ○ | 3 | ● | ● | 3 |
| Yellow (1016) | PSU | ○ | ○ | 4 | ● | ● | 4 |
| Green (6032) | PSU | ○ | ○ | 5 | ● | ● | 5 |
| Blue (5019) | PSU | ○ | ○ | 6 | ● | ● | 6 |
| Orange (2003) | PSU | ○ | ○ | 9 | ○ | ○ | 9 |

- Standard
- On request

For more detailed information on the topic of “autoclaving” see page 121.

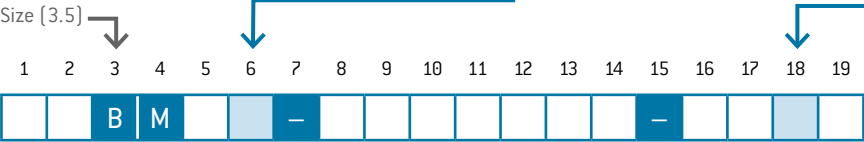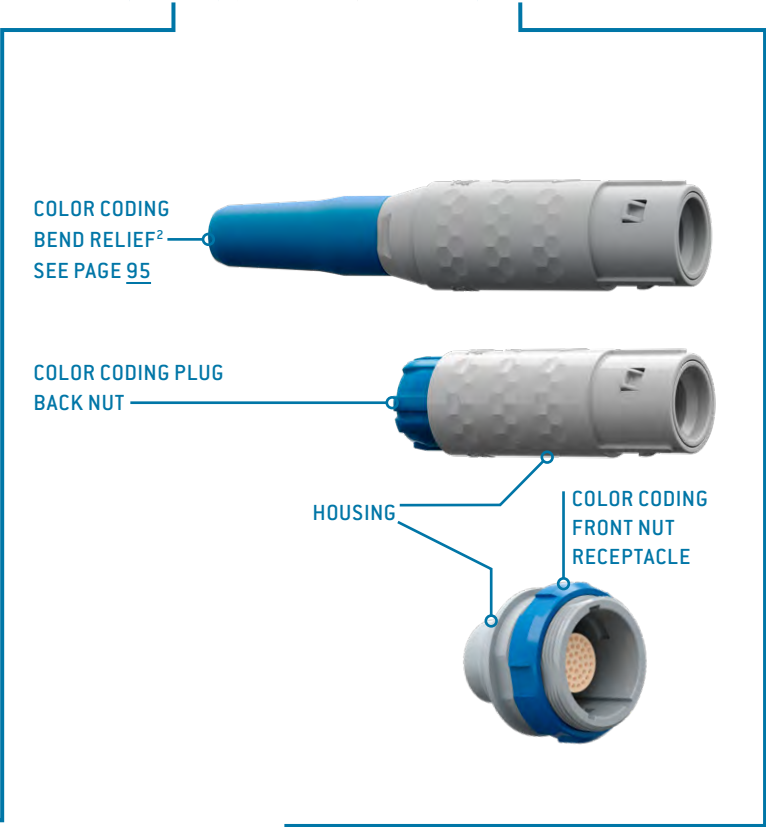

¹ For information about biocompatible materials, please contact sales@odu.de
² Back nuts for cable bend relief have to be ordered in the same color as the connector housing. Please order bend relief separately.



CONTACT INSERT

All working voltages, unless otherwise stated: < 50 V AC / < 75 V DC



Please refer to [Technical Information](#) for further information and also for cases where a higher voltage is needed.

| Number of contacts | | Contact type | | | Part number key insert | | | Contact diameter | Single contact nominal current ¹ | Nominal current insert | Clearance and creepage distance contact to contact | Test voltage ² | Termination diameter | Termination cross-section | | View on termination area | |
|--------------------|---|--------------|--------|-----|------------------------|---|---|------------------|---------------------------------------------|------------------------|----------------------------------------------------|---------------------------|----------------------|---------------------------|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | | Termination | Socket | Pin | | | | mm | A | A | mm | EIA kV RMS | mm | AWG | mm² | Pin piece | Socket piece |
| 4 | 1 | Solder | L | M | C | D | 9 | 0.5 | 5.0 | 2.0 | 0.5 | 0.750 | 0.65 | 26 | 0.15 |  |  |

<

SPECIAL-CONTACT INSERT

19 position hybrid insert for fluid and signals

| Number of contacts | | 18 x signal contacts 1x fluid feedthrough | | | Part number key insert | | | Signal contacts | | | | | | | Fluid feedthrough | | | | View on termination area | | |
|--------------------|---|----------------------------------------------|--------|-----|---------------------------|---|---|---------------------|---------------------------------------------------|------------------------------|----------------------------------------------------------|-----------------------------------------------|-------------------------|------------------------------|-------------------|------------------------------|-------------------------|--------------------------------|------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| | | Termination | Socket | Pin | | | | Contact diameter | Single contact nominal current ¹ | Nominal current insert | Clearance and creepage distance contact to contact | Test voltage ² EIA kV RMS | Termination diameter | Termination cross-section | | Contact inner diameter | Termination diameter | Max. outer tube diameter | Max. working pressure ³ | Pin piece | Socket piece |
| 1 | 9 | solder / nipple fitting | L | M | Y | 1 | 9 | 0.7 | 7.5 | 3.75 | 0.5 | 0.750 | 0.85 | 22 | 0.38 | 1.9 | 3.0 | 5.0 | 4.0 |  |  |
| | | | | | | | | | | | | | | | | | | | | | |

Reversed gender variants possible

¹ Derating factor, see page 116.

² Acc. to EIA-364-20F:2019-02, further information on voltage rating see page 110.

³ With PUR tube

Size [3.5]

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

| | | | | | | | | | | | | | | | | | | | |
|--|--|---|---|--|--|---|---|---|---|--|---|---|---|---|--|--|--|--|--|
| | | B | M | | | - | P | 1 | 9 | | Y | 1 | 9 | - | | | | | |
|--|--|---|---|--|--|---|---|---|---|--|---|---|---|---|--|--|--|--|--|

FURTHER CONTACT INSERTS⁴

All working voltages, unless otherwise stated: < 50 V AC / < 75 V DC

Please refer to [Technical Information](#) for further information and also for cases where a higher voltage is needed.

| Number of contacts | | Contact type | | | Contact diameter mm | Single contact nominal current ¹ A | Nominal current insert A | Test voltage ² EIA kV RMS | Termination diameter mm | Termination cross-section | | View on termination area | |
|--------------------|---|------------------|--------|-----|------------------------|--------------------------------------------------|-----------------------------|-----------------------------------------|----------------------------|---------------------------|-----------------|--------------------------|--------------|
| | | Termination | Socket | Pin | | | | | | AWG | mm ² | Pin piece | Socket piece |
| 0 | 4 | Solder | L | M | 2 | 22.5 | 22.5 | 1.850 | 2.4 | 12 | 2.5 | | |
| | | PCB ³ | Q | – | | 17.5 | 17.5 | | 1.85 | 14 | 1.5 | | |
| | | | | | | | | | 0.7 | – | – | | |
| 1 | 6 | Solder | L | M | 0.9 | 9.0 | 4.5 | 1.000 | 1.1 | 20 | 0.5 | | |
| | | PCB ³ | Q | – | | 7.5 | 3.75 | | 0.85 | 22 | 0.38 | | |
| | | | | | | | | | 0.7 | – | – | | |
| 1 | 8 | Solder | L | M | 0.9 | 9.0 | 4.5 | 1.250 | 1.1 | 20 | 0.5 | | |
| | | PCB ³ | Q | – | | 7.5 | 3.75 | | 0.85 | 22 | 0.38 | | |
| | | | | | | | | | 0.7 | – | – | | |
| 2 | 0 | Solder | L | M | 0.7 | 7.5 | 3.4 | 1.450 | 0.85 | 22 | 0.38 | | |
| | | PCB ³ | Q | – | | 5.0 | 2.25 | | 0.6 | 26 | 0.15 | | |
| | | | | | | | | | 0.5 | – | – | | |
| 2 | 2 | Solder | L | M | 0.7 | 7.5 | 3.4 | 1.100 | 0.85 | 22 | 0.38 | | |
| | | PCB ³ | Q | – | | 5.0 | 2.25 | | 0.6 | 26 | 0.15 | | |
| | | | | | | | | | 0.5 | – | – | | |

Article numbers available via [ODU Product Finder](#).

The socket is installed in the receptacle, the pin is installed in the plug.
Reversed gender variants on request.

Further insert options on request.

¹ Derating factor, see page 116.

² Acc. to EIA-364-20F:2019-02, further information on voltage rating see page 110.

³ PCB layouts on request, print termination only available for receptacle style GD.

⁴ Only available with receptacle style GA and GD.




Picture shows some variants especially designed for customer requirements.

CABLE COLLET SYSTEM

For strain relief of push-pull plugs


| | | Cable diameter | Material |
|---|---|----------------|-------------------------|
| | | mm | |
| 6 | 0 | > 4.6 – 6.0 | PSU (IP50) PA (IP68) |
| 7 | 5 | > 6.1 – 7.5 | |
| 9 | 0 | > 7.6 – 9.0 | |
| 0 | 2 | > 9.1 – 10.5 | |

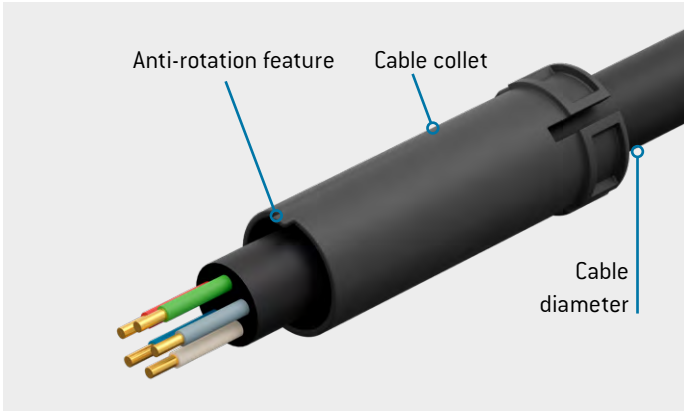

Size [3.5]

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| | | B | M | | | - | P | | | | | | | - | | | | |

CABLE BEND RELIEF

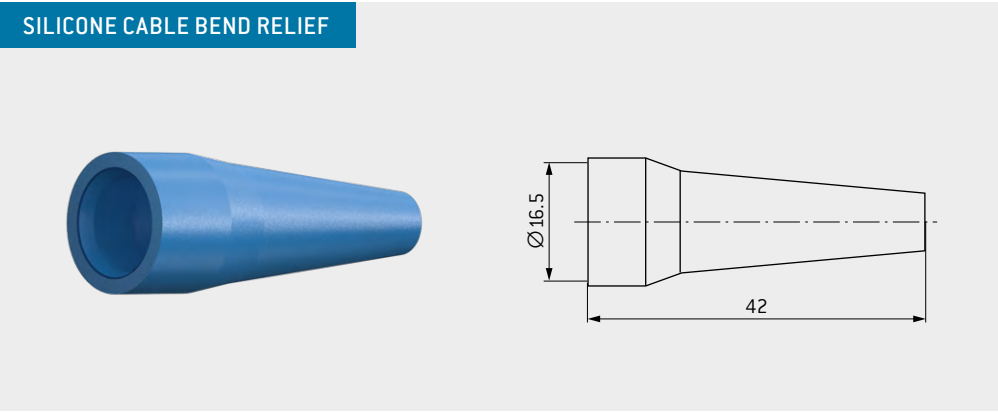


| Order number for bend relief only | Cable diameter | |
|--------------------------------------|----------------|------|
| | min. | max. |
| 703.023.____.965.040 | 4 | 5 |
| 703.023.____.965.050 | 5 | 6 |
| 703.023.____.965.060 | 6 | 7 |
| 703.023.____.965.070 | 7 | 8 |
| 703.023.____.965.080 | 8 | 9 |
| 703.023.____.965.090 | 9 | 10 |
| 703.023.____.965.100 | 10 | 11 |

| Color code | Similar classic RAL |
|---------------|------------------------|
| 202 | Red (3020) |
| 203 | White (9010) |
| 204 | Yellow (1016) |
| 205 | Green (6032) |
| 206 | Blue (5002) |
| 207 | Gray (7005) |
| 208 | Black (9005) |




TRANSPORTATION CAP

Applicable to all straight plugs

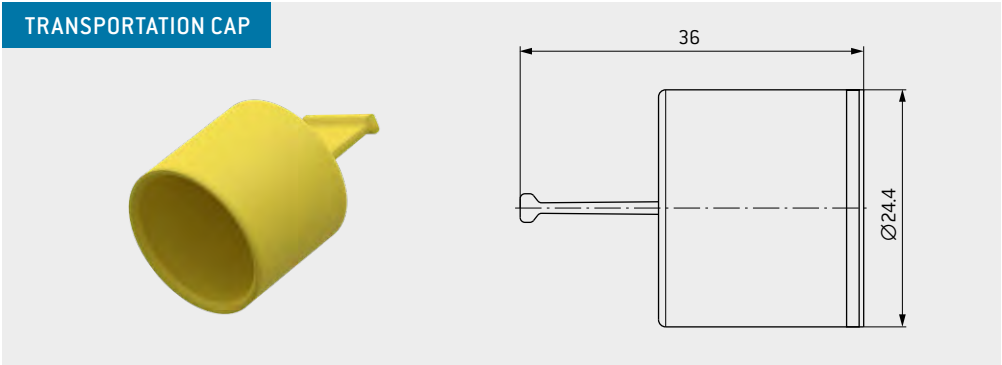

| Part number | Material | Color (similar classic RAL) |
|---------------------|----------|-----------------------------|
| 922.000.002.000.084 | TPE | Yellow { 1016 } |



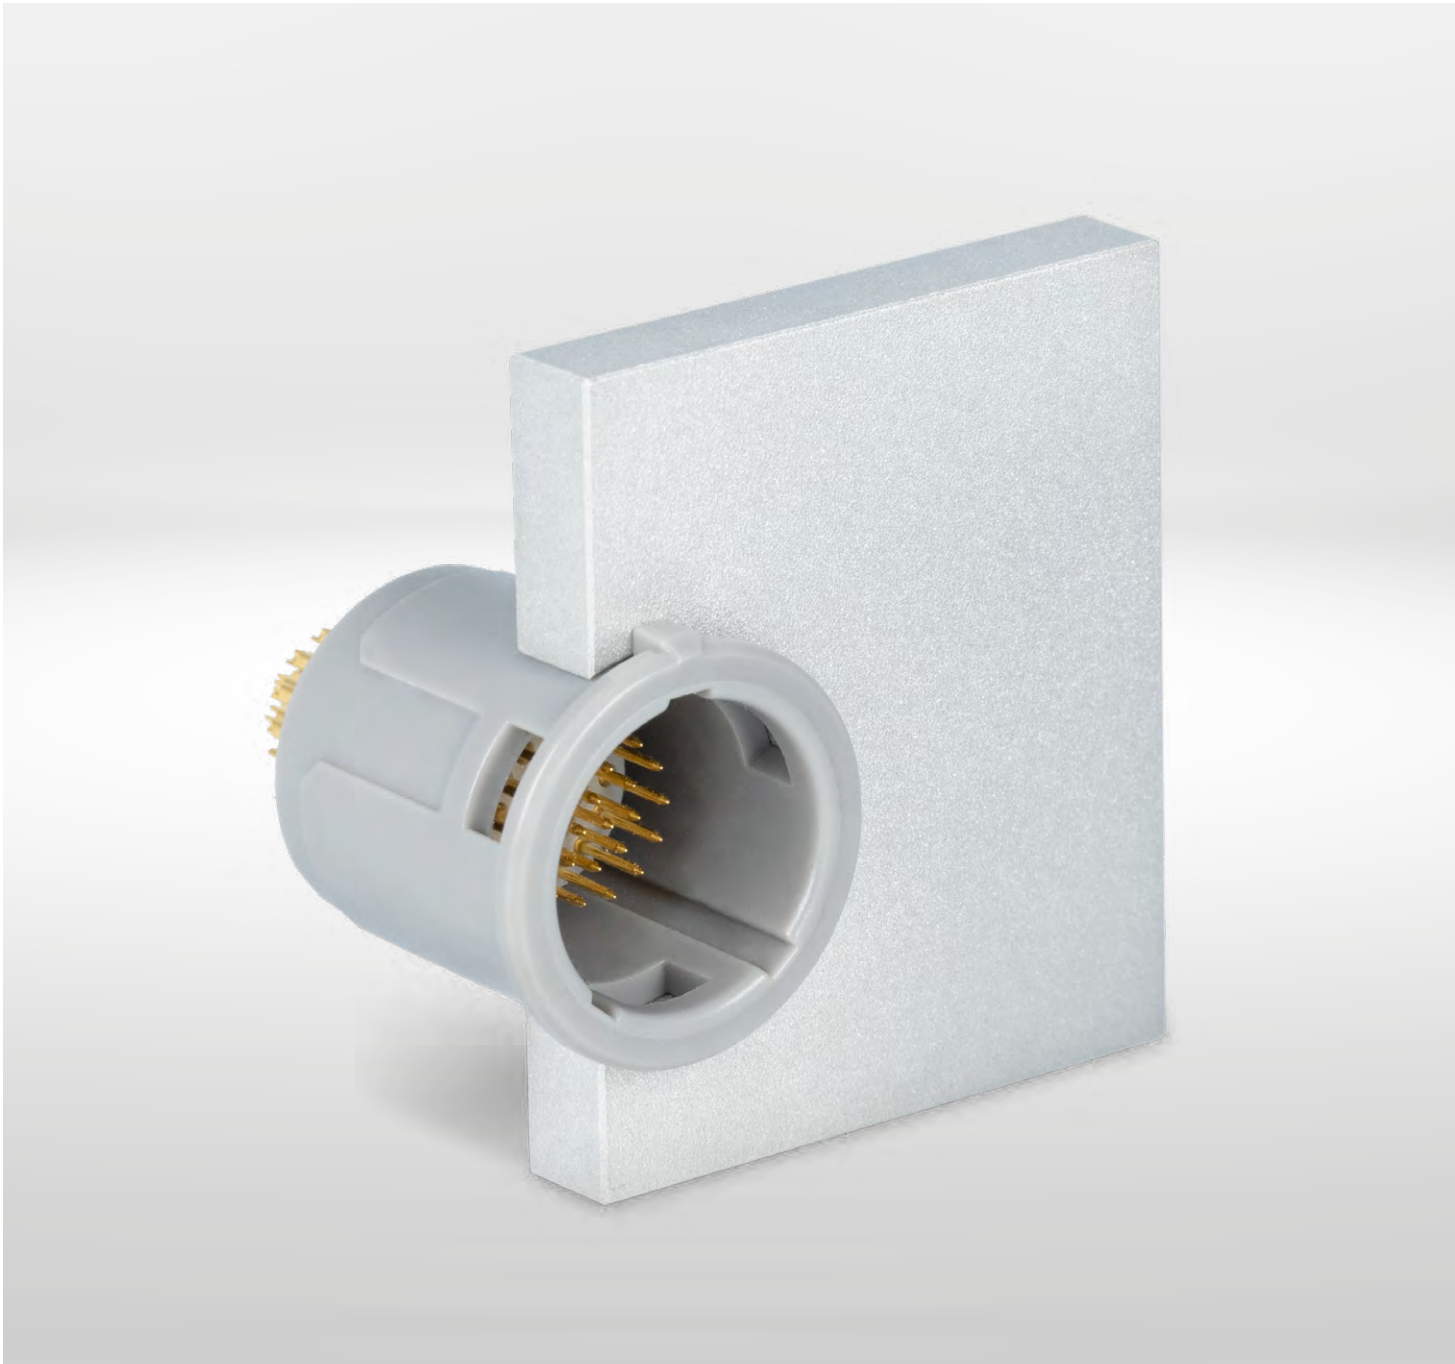

ODU MEDI-SNAP®



ODU DISPOSABLE SOLUTIONS

Summary and examples

SUMMARY

ODU DISPOSABLE SOLUTIONS

The ODU MEDI-SNAP® Disposable products offer a reliable and economical limited use solution for large-volume projects that can be used for at least 25 mating cycles.

TAILORED TO YOUR APPLICATION

- Large selection of different numbers of pin count
- Various sizes
- Large selection of cables on request
- Various colors on request

FURTHER ADVANTAGES AT A GLANCE

Intermateable with the ODU MEDI-SNAP® series – mating connectors are

- Sterilizable, autoclavable
- Durable – up to 5.000 mating cycles

IEC 60601-1 compliant:



- Up to 2 MOPP / 2 M00P
- Up to 15 kV ESD test voltage

Total cost of ownership in focus:

- Optimized manufacturing technologies / assembly processes
- Complete assembled system solutions

ODU OFFERS SOLUTIONS FOR THE FOLLOWING APPLICATIONS

- Dermatology
- Endoscopy
- Respirator
- Patient monitoring
- And many more

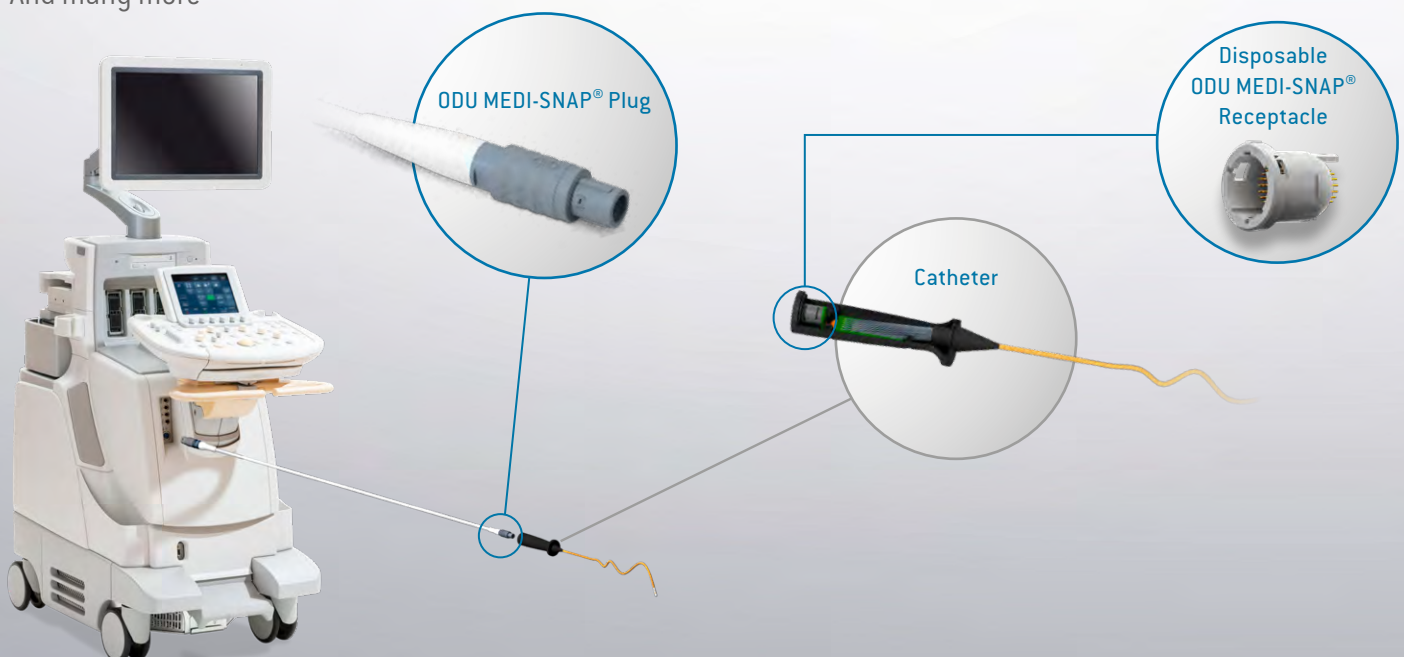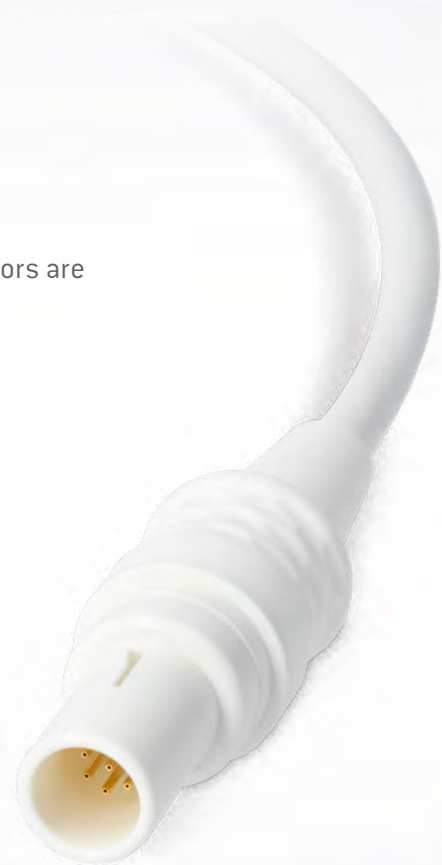

EXAMPLES FOR DISPOSABLE SOLUTIONS

ODU MEDI-SNAP®

Break-away cable assembly size 1 and 2

- Intermateable with reusable receptacles




ODU MEDI-SNAP®

Snap-in receptacle size 1

- Style G2
- Up to 14 contacts
- Match also with metal plugs

See also overview [plugs size 1 \[p.26\]](#)



ODU MEDI-SNAP®

Snap-in receptacle size 2

- Style GB
- Up to 34 contacts (high density)
- 2 MOOP / 1 MOPP



ODU MINI-MED®

plug cable assembly and panel mount receptacle

- Up to 6 contacts
- Smallest footprint

See also ODU MINI-MED® [Brochure](#)





ODU MEDI-SNAP®



TOOLS

The following pages contain tools and wrenches to ensure that your ODU connectors function flawlessly.

CRIMPING TOOLS / ASSEMBLY TOOLS



PART NUMBER CRIMPING TOOL
080.000.051.000.000

Part number positioner,
see table

PROCESSING TOOL FOR CRIMP CONTACTS

Digital adjustment, multiposition

| Size | Number of contacts | Contact diameter mm | Termination cross-section | | Adjustment dim. mm | Positioner | | Positioning setting | | Removal tool |
|------|--------------------|------------------------|---------------------------|-----------------|-----------------------|---------------------|--|---------------------|--------|---------------------|
| | | | AWG | mm ² | | | | Pin | Socket | |
| 1 | 6 to 8 | 0.7 | 24 – 26 | 0.25 – 0.15 | 0.67 | 080.000.051.109.000 | | 9 | 3 | 087.7CC.070.001.000 |
| | | | 22 – 26 | 0.38 – 0.15 | 0.67 | 080.000.051.109.000 | | 9 | 3 | 087.7CC.070.001.000 |
| | 4 to 5 | 0.9 | 22 – 26 | 0.38 – 0.15 | 0.67 | 080.000.051.109.000 | | 8 | 2 | 087.7CC.090.001.000 |
| | | | 20 – 24 | 0.50 – 0.25 | 0.67 | 080.000.051.109.000 | | 8 | 2 | 087.7CC.090.001.000 |



PART NUMBER CRIMPING TOOL
080.000.037.000.000

Part number positioner,
see table

PROCESSING TOOL FOR CRIMP CONTACTS

Mil approved, single position

| Size | Number of contacts | Contact diameter mm | Termination cross-section | | Positioner | | Selector setting | | Removal tool |
|------|--------------------|------------------------|---------------------------|-----------------|---------------------|---------------------|--------------------|--------------------|---------------------|
| | | | AWG | mm ² | | | Pin | Socket | |
| 1 | 6 to 8 | 0.7 | 22 – 26 | 0.38 – 0.15 | 081.KM1.001.948.037 | 081.KM1.001.948.037 | 4 | 4 | 087.7CC.070.001.000 |
| | | 0.7 | 24 – 26 | 0.25 – 0.15 | 081.KM1.001.948.037 | 081.KM1.001.948.037 | 4 | 4 | 087.7CC.070.001.000 |
| | 4 to 5 | 0.9 | 20 – 24 | 0.50 – 0.25 | 081.704.001.849.037 | 081.KM1.001.949.037 | 7/6/5 ¹ | 7/6/5 ¹ | 087.7CC.090.001.000 |
| | | 0.9 | 22 – 26 | 0.38 – 0.15 | 081.704.001.849.037 | 081.KM1.001.949.037 | 4 | 4 | 087.7CC.090.001.000 |
| | Coax | 0.5 | 26 | 0.15 | 081.122.121.001.037 | 081.122.121.002.037 | 3 | 3 | — |

¹ For AWG 20 position 7/for AWG 22 position 6/for AWG 24 position 5

CRIMPING TOOLS / ASSEMBLY TOOLS



PART NUMBER CRIMPING TOOL
080.000.039.000.000

Part number positioner,
see table

PROCESSING TOOL FOR CRIMP CONTACTS

Crimp tool for coax contacts, hexagonal

| Size | Number of contacts | Contact diameter mm | Termination cross-section | Crimp dies |
|------|--------------------|------------------------|---------------------------|---------------------|
| 1 | Coax | 0.7 | Shield | 082.000.039.102.001 |

ASSEMBLY TOOL

Assembly tool for coax size 1



| Size | Number of contacts | Part number |
|------|--------------------|---------------------|
| 1 | Coax | 085.122.121.000.000 |



SPANNER WRENCH



| Size | Use | Part number | Recommended tightening torque Nm | Dimensions in mm | | | | |
|------|----------------------------------------|---------------------|-------------------------------------|---------------------------------------------|-----|------|-----|------|
| | | | | AF | t | B | L | b |
| 1 | Receptacle hex nut | 598.700.001.008.000 | 1.0 | 17 | 3 | 35.5 | 145 | 15 |
| 1 | Plug style S1, W1, K1, K5, G6 back nut | KM1.098.006.001.001 | 0.5 | on request | | | | |
| 1 | Plug style S2, S4, W2, K2, K6 back nut | 598.700.001.022.000 | 0.25 | 9 | 2 | 21.5 | 102 | 9 |
| 1 | Right angled plug clamping cap | 598.700.001.012.000 | 0.3 | 11 | 2 | 24.5 | 115 | 10 |
| 1 | Straight version break-away plug | 598.700.001.012.000 | 0.3 | 11 | 2 | 24.5 | 115 | 10 |
| 2 | Receptacle slotted nut | KM2.098.002.923.008 | 1.0 | for slotted mounting nut, see picture below | | | | |
| 2 | Plug style S1 back nut | KM2.098.006.001.001 | 0.5 | on request | | | | |
| 2 | Plug style S4 back nut | 598.700.001.002.000 | 0.5 | 10 | 2 | 21.5 | 102 | 9 |
| 2 | Straight version break-away plug | 598.700.001.005.000 | 0.5 | 14 | 2.5 | 30.5 | 98 | 16.5 |
| 3.5 | Receptacle hex nut | 598.700.001.019.000 | 2.0 | 30 | 3 | 50 | 150 | 25 |
| 3.5 | Plug style S1 and S3 back nut | KMB.098.006.001.001 | 1.5 | on request | | | | |
| 3.5 | Plug style S2 and S4 back nut | 598.700.001.007.000 | 1.5 | 16 | 3 | 35.5 | 145 | 15 |

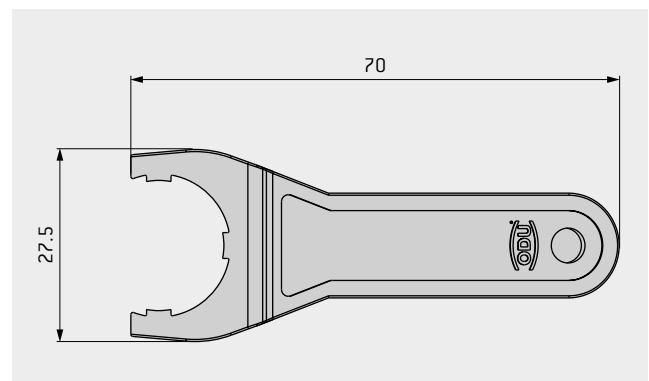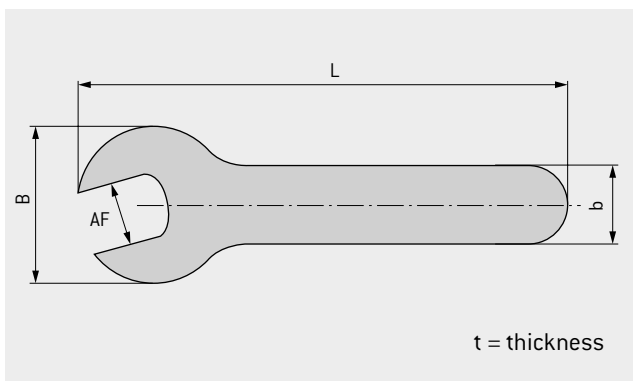


BOX SPANNER FOR RECEPTACLE FRONT NUTS

| Part number | Size | Material front nut | Applicable for style | Recommended tightening torque Nm |
|---------------------|------|--------------------|----------------------|-------------------------------------|
| KM1.098.001.923.008 | 1 | Plastic | G5, G6, G8 | 1.0 |
| KM1.098.002.902.000 | 1 | Metal | G5, GK | 1.0 |
| KM2.098.001.923.008 | 2 | Plastic | G5 | 1.0 |
| KMB.098.001.000.000 | 3.5 | Plastic | G8, GC, GD | 1.5 |



REMOVAL TOOLS FOR CRIMP-CLIP-CONTACTS

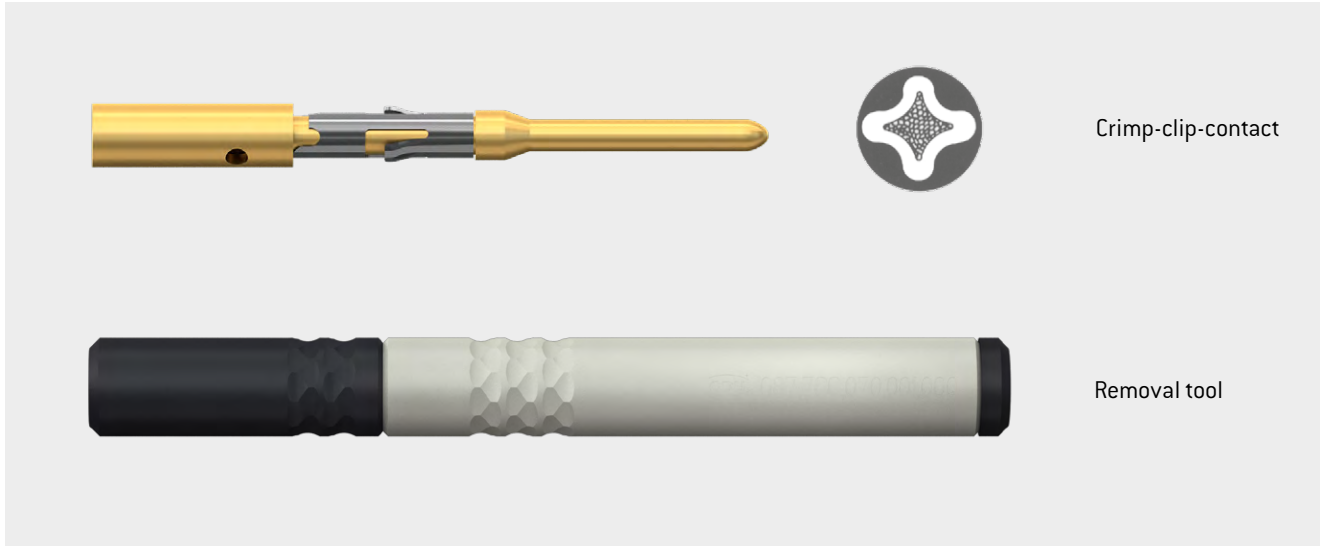

| Part number | Contact Ø mm |
|---------------------|-----------------|
| 087.7CC.070.001.000 | 0.7 |
| 087.7CC.090.001.000 | 0.9 |

NOTE ON ADHESIVE !

Recommended adhesive for the back nut

Scotch-Weld™, DP 190 (Gray)

ODU PART NUMBER: 890.204.000.030.025


Recommended cleaning agent: Isopropyl alcohol

Caution! Cracks may appear later if unauthorized adhesives and cleaning agents are used

For assembly instructions, please refer to our website: www.odu-connectors.com/downloads/assembly-instructions



ODU MEDI-SNAP®

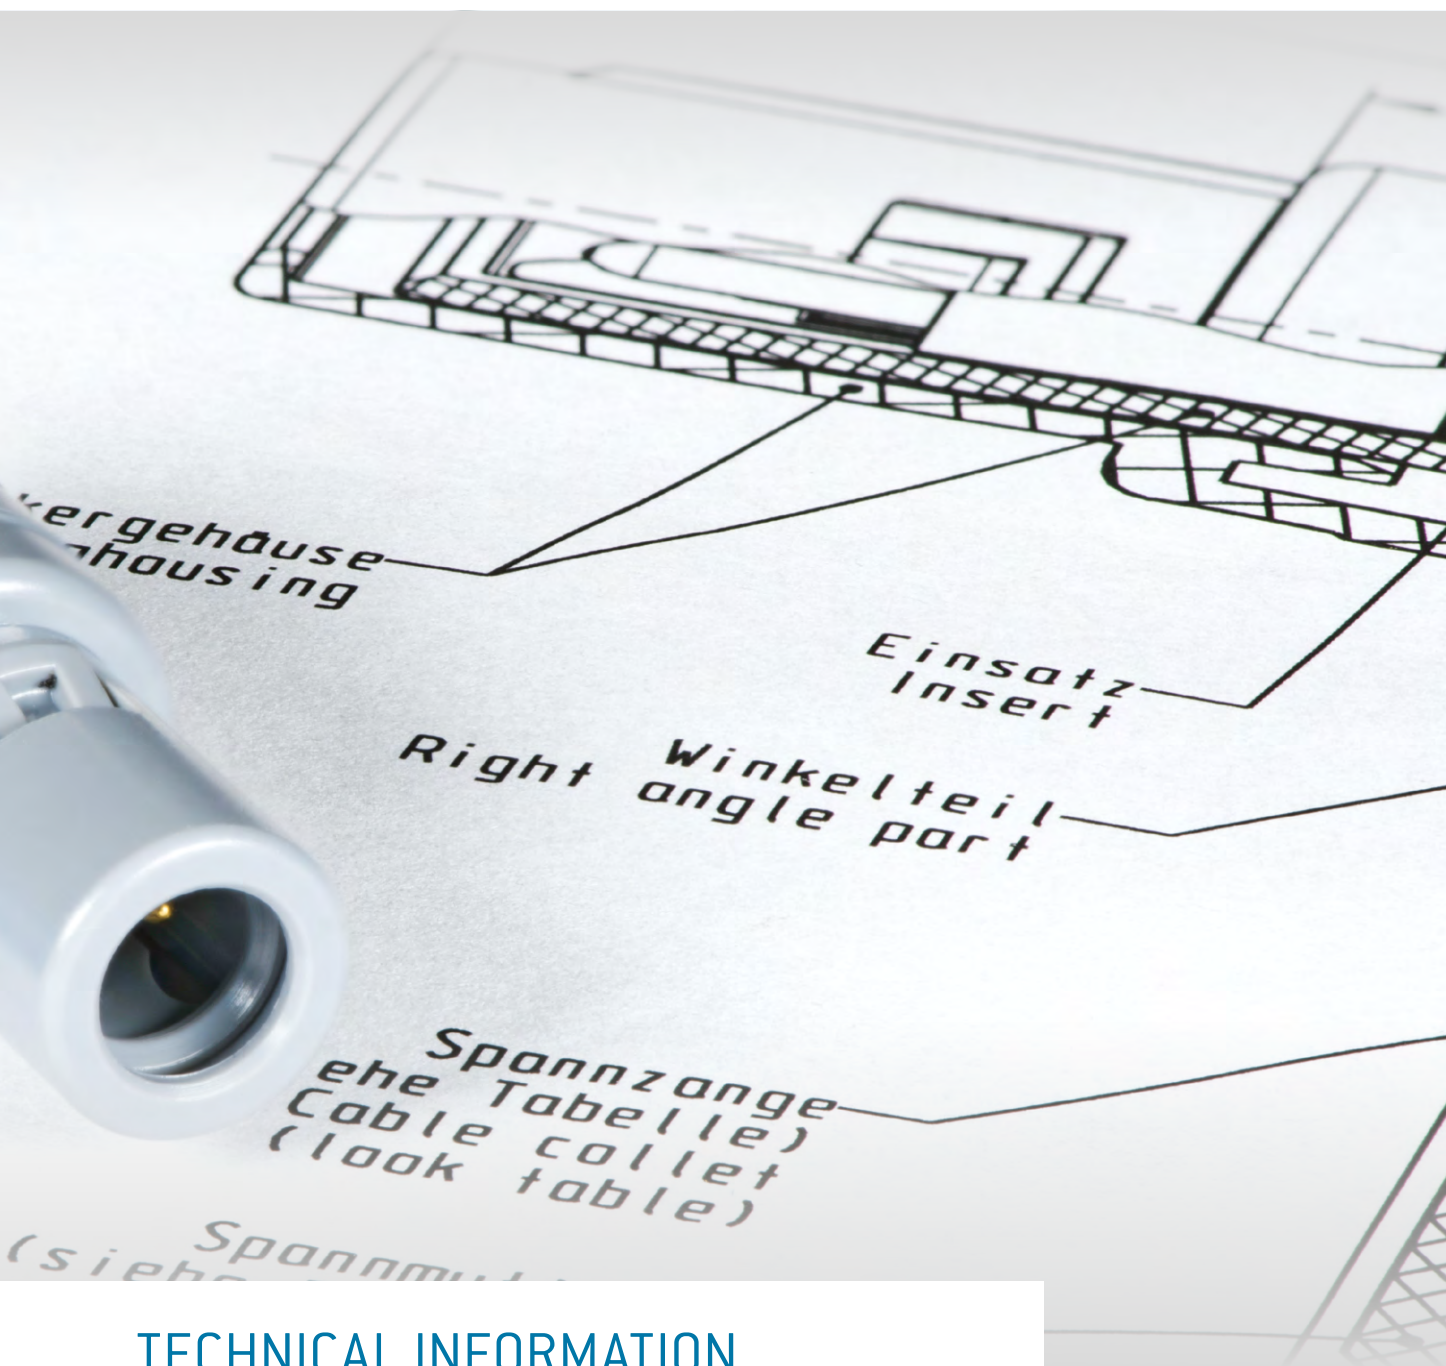

TECHNICAL INFORMATION

ODU connectors ensure perfect and reliable transmission of power, signal, data and other media in a wide variety of applications.

Further information can be found on the following pages.

EXPLANATIONS AND INFORMATION ON SAFETY REQUIREMENTS



GENERAL

All the technical information listed in this catalog has been determined by drawing on various standards. Unless otherwise stated, standard IEC 61984:2008 (VDE 0627:2009-11) "Connectors – Safety requirements and tests" has been used to dimension and determine the values provided.

This international standard applies to connectors and cable assemblies with rated voltages above 50 V and up to 1,000 V AC and DC and rated currents up to 125 A per contact, for which either no detail specification exists or the detailed specification calls up this standard for safety aspects. For connectors with rated voltage up to 50 V, this standard may be used as a guide. In this case, reference is made to IEC 60664-1 for clearance and creepage distances. This standard may also be used as a guide for connectors with rated current higher than 125 A per pole. This standard does not apply to connectors in or on equipment where application specific safety requirements for connectors exist.

All the connectors and cable assemblies shown here are without breaking capacity (COC) according to IEC 61984:2008 (VDE 0627:2009-11).

All of the voltage data listed in this catalog is only valid when the connectors and inserts and cable assemblies have been correctly mounted and are being used properly.

EXPLANATIONS AND INFORMATION ON VOLTAGE RATINGS FOR LOW VOLTAGE INSERTS

GENERAL WORKING VOLTAGE (RATED VOLTAGE)

All shown connectors and cable assemblies with the exemption of inserts with explicitly stated operating voltage (for example mains and high voltage inserts) are default rated to fulfil safety extra low voltage (SELV), based on IEC 61140:2016 (VDE 0140-1:2016-11) "Protection against electric shock – Common aspects for installation and equipment". The connectors and cable assemblies are default rated to a voltage of less than 50 V AC / 75 V DC. If the application requires a higher operating voltage and the standard EIA-364-20F:2019-02 is applicable, please refer to the following section. In case other standards rule a specific use of the connector, then the application specific safety criteria shall be considered first. These other standards must be evaluated during the engineering and design of the equipment.

VOLTAGE RATING ACCORDING EIA-364-20F:2019-02 (TEST VOLTAGE / WITHSTANDING VOLTAGE)

Caution: For operating voltages above 50 V AC / 120 V DC, life is in danger!

The test voltage values in the catalog are determined according to EIA-364-20F:2019-02 method A, test condition I (sea level up to 2,000 m) "Withstanding Voltage – Test Procedure for Electrical connectors, Sockets and Coaxial Contacts". The test voltage represents the physical limit of the connectors and cable assemblies and is usually set at 75 % of the break-down voltage. According to EIA-364-20F:2019-02 and former MIL-STD-1344 method 3001 it is specified to set the operating voltage (rated voltage) to 1/3 of the test voltage acc. to EIA-364-20F:2019-02 method A, test condition I (sea level up to 2,000 m). Please note, the subsequently explained procedure according to EIA-364-20F:2019-02 does not consider protection against electric shock. Suitable precautions (protective measures) such as touch protection, protective insulation, protective separation, protective earth conductor etc. must be implemented.

Please consult us for advice on how the proper connector and cable assembly can be chosen and thereby indicate the safety standard, which your product has to meet.



EXPLANATIONS AND INFORMATION ON VOLTAGE RATINGS AND SAFETY REQUIREMENTS FOR MAINS AND HIGH VOLTAGE INSERTS

The clearance and creepage distances are determined as specified in IEC 60664-1:2020 (VDE 0110-1:2022-07). In case other standards rule a specific use of the connector and/or cable assembly, then the application specific safety criteria shall be considered first. The most important variables that influence safety together with the matching electrical parameters are explained in more detail below in the section IEC 60664-1:2020 (VDE 0110-1:2022-07) "Insulation coordination for equipment within low-voltage systems".

Since this catalog cannot take all product standards into consideration, the following standard in terms of voltage data is used:

IEC 60664-1:2020 (VDE 0110-1:2022-07) "INSULATION COORDINATION FOR EQUIPMENT WITHIN LOW-VOLTAGE SYSTEMS" [The texts given here are excerpts from the standard]

According to this standard, the minimum clearance distances for equipment not connected directly to the low voltage mains should be measured according to

- the possible continuous voltages,
- the temporary overvoltages, or
- periodic peak voltages

(see Table F.8 / F.9 in IEC 60664-1:2020 (VDE 0110-1:2022-07)).

This is what is known as a basic safety standard, which regulates the minimum requirements for dimensioning clearance and creepage distances, as well as their inspection. The standard applies to equipment used up to an altitude of 2,000 m above sea level and with a rated alternating voltage of up to 1,000 V and a nominal frequency of up to 30 kHz or a rated direct voltage of up to 1,500 V. The correction factors stated in the standard must be taken into account for applications at altitudes over 2,000 m above sea level. This standard covers those cases where corresponding product standards do not define any values for clearance and creepage distances, nor lay down any requirements for solid insulation, or where no product standards are even available.

The following general specifications have been defined for the dimensioning of mains and high-voltage inserts:

- The clearance (based on inhomogeneous field) and creepage distances (based on pollution degree 3 in mating area) are determined as specified in this standard.
- Isolation between electrical circuits (functional insulation between the contacts) or between an electrical circuit and local grounding (contact with grounded connector components) has been defined as basic insulation. If "double insulation" or "reinforced insulation" is required in your application, the voltage data provided in this catalog is no longer valid.

In the following explanations, the term "nominal voltage" is the value of the given voltage as indicated by the utility or mains supplier for classification of the overvoltage category.

DIMENSIONING OF RATED SURGE VOLTAGE

Value of an impulse withstand voltage that is indicated by the manufacturer for equipment or a part thereof, and which indicates the defined endurance of its insulation against transient (brief, duration of a few milliseconds) over-voltages. The impulse withstand voltage is the highest value of the surge voltage of a defined form and polarity which will not result in the dielectric breakdown of the insulation under defined conditions.

Depending upon the indicated pollution degree, the rated surge voltage varies in accordance with the clearance distance between the individual contacts or contacts to the housing (see Table F.2 in IEC 60664-1:2020 (VDE 0110-1:2022-07)). The corresponding rated surge voltages for the connectors and cable assemblies can be determined in this manner if the loads with transient over-voltages in the application need to be taken into account.



If a “periodic peak voltage” is present for a long time over the service life (more than approximately 60 minutes), this is not an over-voltage as regards insulation dimensioning under the terms of the standard, but must be considered a continuous voltage instead. In such cases, the ‘periodic peak voltage’ must be used as the operating voltage.

INFLUENCE OF POLLUTION DEGREE ON THE INSULATION COORDINATION

Any pollution combined with moisture can influence the insulation capacity on the surface of the connector. In order to define various rating parameters, a pollution degree must be selected for the equipment according to the criteria listed below.

All the technical specifications of the mains and high voltage inserts in this catalog are based on pollution degree 3.

Pollution degree 3 is used, for example, for devices in industrial, commercial, and agricultural operations, unheated storage areas, and workshops. Conductive pollution is present or dry, non-conductive pollution that will become conductive because condensation is expected.

Higher voltages may be possible if the pollution degree is defined as less than 3.
Please contact us for more details about the connectors performance specified for pollution degree 2 or 1.

HOUSING MATERIALS / SURFACES



| Component | Material designation | Surface |
|-------------------------------------------------------------|----------------------|---------------------------|
| Housing | PSU / PEI / Brass | Chrome (metal version) |
| Back nut / Cable collet / Front nut / Mounting nut | PSU / PEI / PA | |
| Insulator | PEEK / PBT / PSU | |
| Hex nut | Brass | Ni |
| Contacts | Brass | Au |

INSULATOR MATERIALS (ROHS 2011/65/EU COMPLIANT)

| | Norm | Unit | PEEK | PBT | PSU |
|---------------------------------------------------|------------------------------------------------------|-------|-----------------------------|-----------------------------|-----------------------------|
| Flammability rating | UL 94 | — | V – 0 / 1.5 | V – 0 / 1.5 | V – 0 / 4.5 |
| Operation temperature | — | °C | –50 to +250° | –50 to +180° | –50 to +170° |
| Dielectric strength | IEC 60243-1:2013 (VDE 0303-21:2014-01) | kV/mm | 19 | 27 | 17 |
| Comparative figure of the creep resistance CTI | IEC 60112: 2003 (VDE 0303-11:2010-05) | — | 175 | 600 | 150 |
| Water absorption | ASTM D 570:1998 / ISO 62:2008-02 | % | 0.1 | 0.3 | 0.3 |
| Insulation resistance | IEC 60512-3-1:2002 (DIN EN 60512-3- 1:2003-01) | Ω | $> 1 \times 10^{12} \Omega$ | $> 1 \times 10^{12} \Omega$ | $> 1 \times 10^{12} \Omega$ |

All values in the new condition

TERMINATION TECHNOLOGIES



In general, insulators with socket contacts are installed in the live part (to provide protection from accidental touch). The means of mounting the contacts in the insulator is important on account of the termination technologies. Termination technologies for ODU MEDI-SNAP® connectors include: soldering, crimping and PCB.

SOLDER TERMINATION



CRIMP-CLIP-CONTACT FOR PEEK INSULATOR



PRINT TERMINATION



TERMINATION TECHNOLOGIES FOR TURNED CONTACTS

Solder termination

The contacts are mounted in the insulator before the single connectors are assembled. An insulator with pre-installed contacts is referred to as a contact insert.

Crimp termination

Here, the individual contact is connected to the individual wires via deformation in the termination area. Then the contacts are individually installed in the insulator. Accordingly, insulators and individual contacts – and not complete contact inserts – are supplied for the crimp termination. The contact processing for the production of connecting cables via crimping creates a secure, durable and corrosion-free contact. Cold compaction (crimping) compresses the conductor and contact material to the press points so as to form a gas-tight connection with tensile strength to fit the conductor material. 8-point deformation is generally used for turned crimp contacts.

PCB termination

This is only used in the receptacle if the receptacle is to be mounted directly on a printed circuit board (PCB). Further information is available upon request.

CONVERSIONS/AWG (AMERICAN WIRE GAUGE)



| Circular wire | | | | | |
|---------------|----------|-------|----------------------------------|-----------------|-------------------------|
| AWG | Diameter | | Cross-section mm ² | Weight kg/km | Max. resistance Ω/km |
| | Inch | mm | | | |
| 10 (1) | 0.1019 | 2.590 | 5.26 | 46.77 | 3.45 |
| 10 (37/26) | 0.1150 | 2.921 | 4.74 | 42.10 | 4.13 |
| 12 (1) | 0.0808 | 2.050 | 3.31 | 29.41 | 5.45 |
| 12 (19/25) | 0.0930 | 2.362 | 3.08 | 27.36 | 6.14 |
| 12 (37/28) | 0.0910 | 2.311 | 2.97 | 26.45 | 6.36 |
| 14 (1) | 0.0641 | 1.630 | 2.08 | 18.51 | 8.79 |
| 14 (19/27) | 0.0730 | 1.854 | 1.94 | 17.23 | 9.94 |
| 14 (37/30) | 0.0735 | 1.867 | 2.08 | 18.870 | 10.50 |
| 16 (1) | 0.0508 | 1.290 | 1.31 | 11.625 | 13.94 |
| 16 (19/29) | 0.0590 | 1.499 | 1.23 | 10.928 | 15.70 |
| 18 (1) | 0.0403 | 1.020 | 0.823 | 7.316 | 22.18 |
| 18 (19/30) | 0.0052 | 1.321 | 0.963 | 8.564 | 20.40 |
| 20 (1) | 0.0320 | 0.813 | 0.519 | 4.613 | 35.10 |
| 20 (7/28) | 0.0390 | 0.991 | 0.563 | 5.003 | 34.10 |
| 20 (19/32) | 0.0420 | 1.067 | 0.616 | 5.473 | 32.00 |
| 22 (1) | 0.0253 | 0.643 | 0.324 | 2.883 | 57.70 |
| 22 (7/30) | 0.0288 | 0.732 | 0.324 | 2.965 | 54.80 |
| 22 (19/34) | 0.0330 | 0.838 | 0.382 | 3.395 | 51.80 |
| 24 (1) | 0.0201 | 0.511 | 0.205 | 1.820 | 91.20 |
| 24 (7/32) | 0.0250 | 0.635 | 0.227 | 2.016 | 86.00 |
| 24 (19/36) | 0.0270 | 0.686 | 0.241 | 2.145 | 83.30 |
| 26 (1) | 0.0159 | 0.404 | 0.128 | 1.139 | 147.00 |
| 26 (7/34) | 0.0200 | 0.508 | 0.141 | 1.251 | 140.00 |
| 26 (19/38) | 0.0220 | 0.559 | 0.154 | 1.370 | 131.00 |
| 28 (1) | 0.0126 | 0.320 | 0.0804 | 0.715 | 231.00 |
| 28 (7/36) | 0.0160 | 0.406 | 0.0889 | 0.790 | 224.00 |
| 28 (19/40) | 0.0170 | 0.432 | 0.0925 | 0.823 | 207.00 |
| 30 (1) | 0.0100 | 0.254 | 0.0507 | 0.450 | 374.00 |
| 30 (7/38) | 0.0130 | 0.330 | 0.0568 | 0.505 | 354.00 |
| 30 (19/42) | 0.0123 | 0.312 | 0.0720 | 0.622 | 310.00 |
| 32 (1) | 0.0080 | 0.203 | 0.0324 | 0.288 | 561.00 |
| 32 (7/40) | 0.0110 | 0.279 | 0.0341 | 0.303 | 597.10 |
| 32 (19/44) | 0.0100 | 0.254 | 0.0440 | 0.356 | 492.00 |
| 34 (1) | 0.0063 | 0.160 | 0.0201 | 0.179 | 951.00 |
| 34 (7/42) | 0.0070 | 0.180 | 0.0222 | 0.197 | 1,491.00 |
| 36 (1) | 0.0050 | 0.127 | 0.0127 | 0.1126 | 1,519.00 |
| 36 (7/44) | 0.0060 | 0.150 | 0.0142 | 0.1263 | 1,322.00 |

The American Wire Gauge (AWG) is based on the principle that the cross-section of the wire changes by 26 % from one gauge number to the next. The AWG numbers decrease as the wire diameter increases, while the AWG numbers increase as the wire diameter decreases. This only applies to solid wire.

However, stranded wire is predominately used in practice. This has the advantage of a longer service life under bending and vibration as well as greater flexibility in comparison with solid wire.

Stranded wires are made of multiple, smaller-gauge wires (higher AWG number). The stranded wire then receives the AWG numbers of a solid wire with the next closest cross-section to that of the stranded wire. In this case, the cross-section of the stranded wire refers to the sum of the copper cross-sections of the individual wires.



Accordingly, strands with the same AWG number but different numbers of wires differ in cross-section. For instance, an AWG 20 strand of 7 AWG 28 wires has a cross-section of 0.563 mm², while an AWG 20 strand of 19 AWG 32 wires has a cross-section of 0.616 mm².

Source: ASTM

CURRENT LOAD OF TURNED CONTACTS



Nominal single contact current load for pin / slotted socket (nominal diameter 0.5 mm – 2 mm)

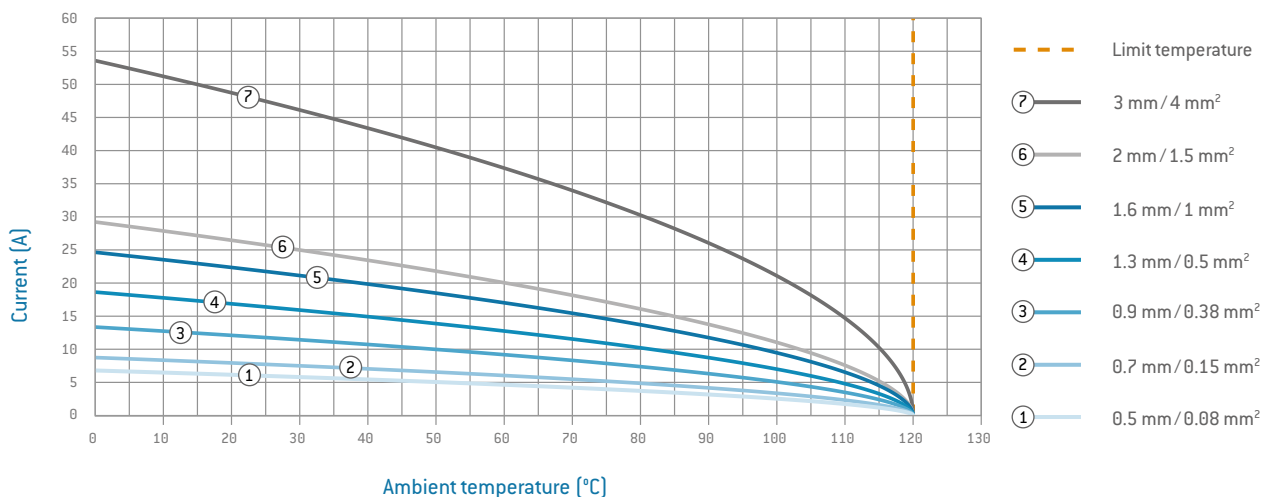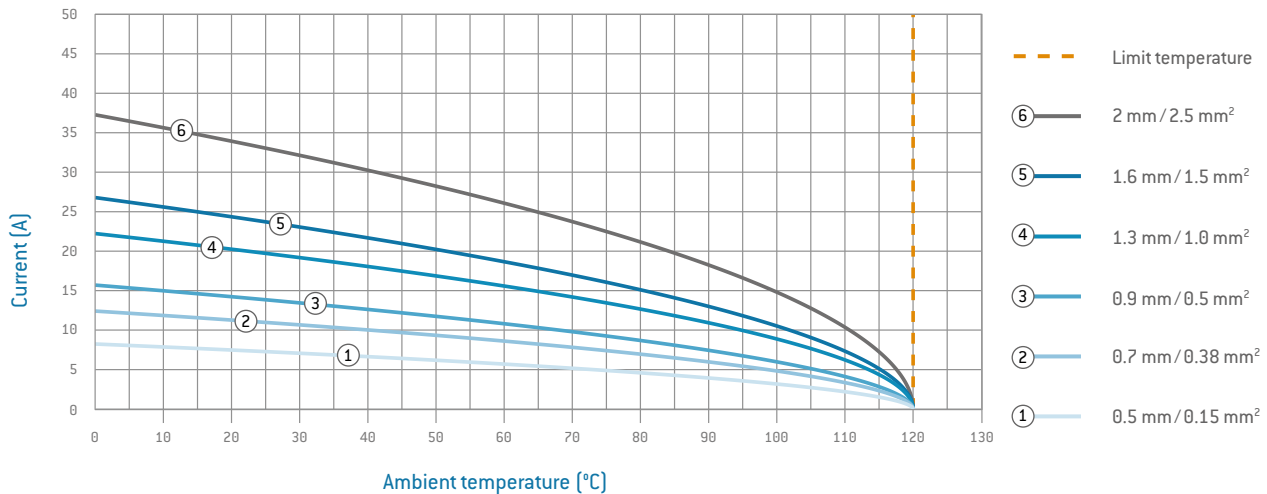

UPPER LIMIT TEMPERATURE OF STANDARD CONTACTS: +120 °C

The wire cross-section shown in the legend was connected as test cable. In the case of multi-position connectors and cables, the heating is greater than it is with individual contacts. For that reason, it is calculated with a reduction factor. For connectors, the reduction factors for multi-core cables pursuant to VDE 0298-4:2013-06 are applied. The reduction factor is factored in at 5 live wires and up.

DERATING CURVE

The corrected current-carrying capacity curve, derived from the base curve determined (0.8 x measured current). It factors in manufacturing tolerances as well as uncertainties in temperature measurement and measurement arrangement, see derating measurement method.

RATED CURRENT (NOMINAL CURRENT)

The metrologically determined current which is permitted to flow continuously through all contacts at the same time and will increase the contact temperature by 45 Kelvin. The amperage is determined according to the derating measurement method (IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003-01)) and derived from the derating curve.

DERATING FACTOR

| Number of loaded wires | Derating factor |
|------------------------|-----------------|
| 5 | 0.75 |
| 7 | 0.65 |
| 10 | 0.55 |
| 14 | 0.50 |
| 19 | 0.45 |
| 24 | 0.40 |



IEC 60601-1:2005 (3RD EDITION)



The ODU MEDI-SNAP® (plastic connectors only) offers a maximum on electrical safety, in particular the highest patient protection against electrical shock according IEC 60601-1:2005 (VDE 0750-1:2013-12). Mainly in applications located in the direct proximity to patients and operators, the approval authorities place maximum requirements on the electrical safety of medical products and the well-being of patients.

This includes:

1. MEANS OF PROTECTION
2. ELECTRICAL DISCHARGE TEST (ESD)
3. ELECTRICAL FINGER TEST

1. MEANS OF PROTECTION

In order to protect patients as well as operators from the risk of electrical shock from live devices, medical devices must ensure suitable means of protection. Depending on application and regulations, the specification of means of protection can differ.

Direct patient environment according IEC 60601-1:2005 requires two means of protection for both patients and operators must be applied in electrical medical equipment and systems (2 MOPP and/or 2 MOPP). This approach ensures, if one means of protection fails, the other takes effect.


The following table is valid for a electrical medical device with a working mains voltage of max. 250 V AC (degree of pollution 2).

To ensure the required clearance and creepage distance in the termination area of plug style A5, a corresponding potting sleeve must be used (not included in the scope of delivery).

| MOPP / MOPP | Clearance distance to the test finger mm | Creepage distances to the test finger mm | Test voltage V AC |
|-------------|------------------------------------------------|------------------------------------------------|----------------------|
| 1 MOPP | ≥ 2 | ≥ 2.5 | 1,500 |
| 2 MOPP | ≥ 4 | ≥ 5 | 3,000 |
| 1 MOPP | ≥ 2.5 | ≥ 4 | 1,500 |
| 2 MOPP | ≥ 5 | ≥ 8 | 4,000 |

To guarantee the means of protection described, the corresponding clearance and creepage distances to touchable conductive components in mated condition must be ensured.

The measurement of clearance and creepage is visualized based on the cross sectional view of a mated pair ODU MEDI-SNAP® size 1 (receptacle style G4, plug style S1).

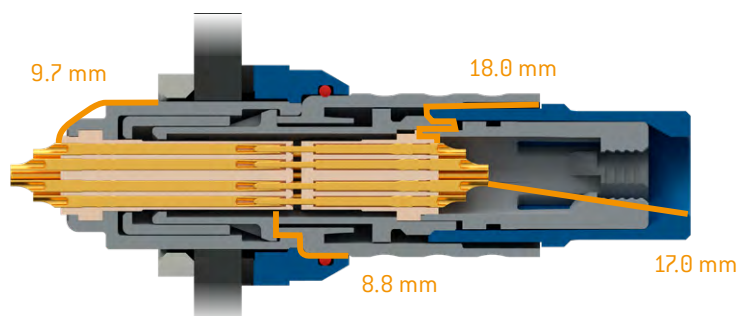

The particular means of protection are valid for all available contact inserts. Please see the corresponding means of protection of each individual connector style at the connector details.

IEC 60601-1:2005 (3RD EDITION)



2. ELECTRICAL DISCHARGE TEST (ESD)

The ODU MEDI-SNAP® withstand electrical discharge up to ± 15 kV [air]¹. Therefore, the connector is perfectly secured against voltage punctures from outside. Such voltage punctures can cause malfunctions or other electrical safety problems which need to be avoided in mated condition.


| Environmental phenomena | Reference | Test specification |
|------------------------------------------------------------------|--------------------|---------------------------------------|
| Electrostatic discharge (ESD), enclosure port | IEC 61000-4-2:2008 | Contact ± 8 kV Air ± 15 kV |
| Electrostatic discharge (ESD), patient coupling port | IEC 61000-4-2:2008 | Contact ± 8 kV Air ± 15 kV |
| Electrostatic discharge (ESD), signal input/output coupling port | IEC 61000-4-2:2008 | Contact ± 8 kV Air ± 15 kV |

¹ Valid for plastic connectors in mated condition

- Size 1: receptacle style G4, G9, GA
- Size 2: receptacle style G4
- Size 3.5: all receptacles listed in the catalog

3. ELECTRICAL FINGER TEST

The finger test ensures that in unmated condition the electrical contacts are not accessible. This is the case for all ODU MEDI-SNAP® connectors with socket inserts shown in this catalog. (Exemplary see size 2 receptacle style G5)

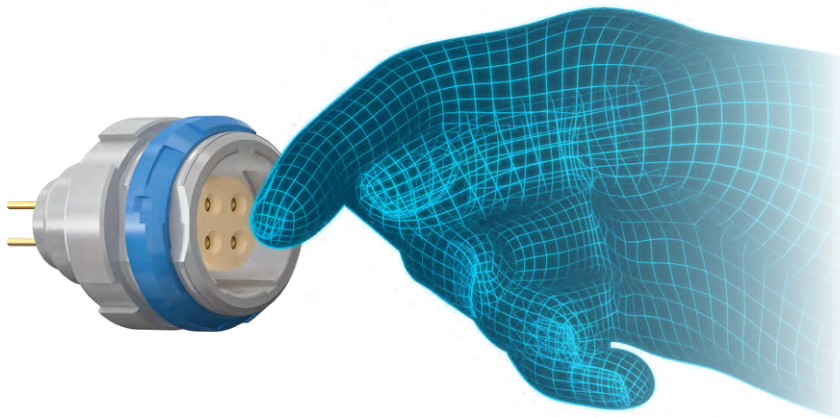

INTERNATIONAL PROTECTION CLASSES



Acc. IEC 60529:1989 (VDE 0470-1:2014)

| Code letters (International Protection) | | First code number (Degrees of protection against access to hazardous parts respectively against solid foreign objects) | | Second code number (Degrees of protection against water) | | |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| IP | | 6 | | 5 | | |
| Code number | Protection against access to hazardous parts / Protection against ingress of solid foreign objects | | | Code number | Protection against harmful effects due to the ingress of water | |
| 0 | No protection | | No protection against contact / No protection against solid foreign objects | 0 | No protection against water | No protection against water |
| 1 | Protection against large foreign objects | | Protection against contact with the back of the hand / Protection against solid foreign objects Ø ≥ 50 mm | 1 | Protection against dripping water | Protection against vertically falling waterdrops |
| 2 | Protection against medium-sized foreign objects | | Protection against contact with the fingers / Protection against solid foreign objects Ø ≥ 12.5 mm | 2 | Protection against angular dripping water (from angles) | Protection against waterdrops falling at an angle (any angle up to 15° of the vertical) |
| 3 | Protection against small foreign objects | | Protection against contact with tools / Protection against solid foreign objects Ø ≥ 2.5 mm | 3 | Protection against spray water | Protection against spray water (any angle up to 60° of the vertical) |
| 4 | Protection against granular foreign objects | | Protection against contact with a wire / Protection against solid foreign objects Ø ≥ 1.0 mm | 4 | Protection against splashing water | Protection against splashing water from any direction |
| 5 | Dustproof | | Protection against contact with a wire / Protection against uncontrolled ingress of dust | 5 | Protection against water jet | Protection against water jet from any direction |
| 6 | Dustproof | | Protection against contact with a wire / Complete protection against ingress of dust | 6 | Protection against powerful water jet | Protection against powerful water jet from all directions |
| | | | | 7 | Protection against the effects of temporary immersion in water | Protection against ingress of water negatively impacting the proper function by temporary submersion into water |
| | | | | 8 | Protection against the effects of continuous immersion in water | Protection against ingress of quantities of water negatively impacting the proper function by continuous submersion into water |
| | | | | 9 | Protection against high pressure water jet featuring high temperatures | Protection against water from all directions characterized by high pressure and high temperatures |

AUTOCLAVING OF ODU MEDI-SNAP®




The ODU MEDI-SNAP® connectors are also available for the following sterilization processes: Steam sterilization with pre-vacuum or gravitation process. The connectors are tested with autoclave equipment in accordance with DIN EN 13060:2019-02 at +134 °C.

For other sterilization processes like Sterrad / ETO and Gamma, please contact us.
For autoclavable system solutions, we recommend our silicone overmolded cable assemblies.

Silicone overmolding
and free samples on request,
please contact sales@odu.de

Sterilization curve

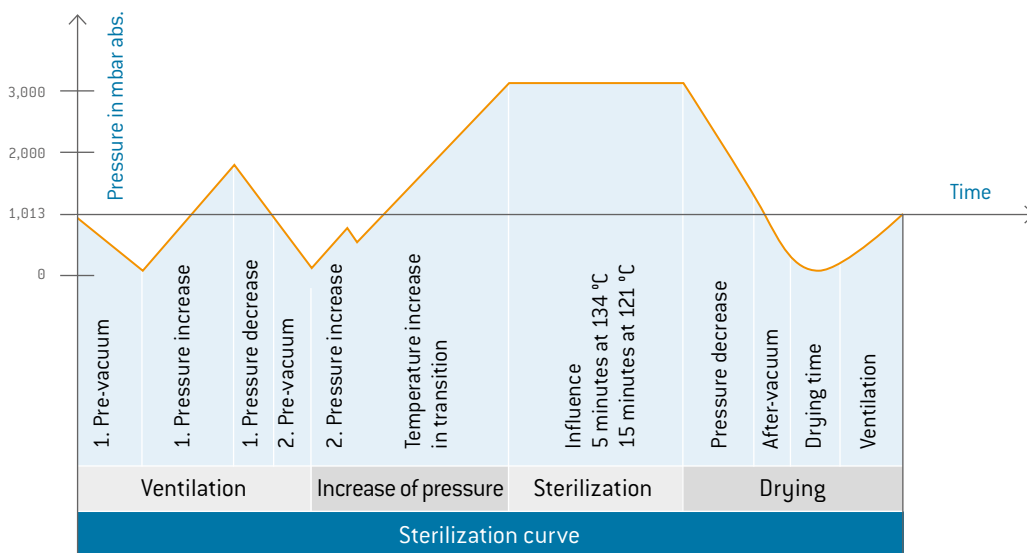

| Size | Autoclaving | |
|------------------|----------------|-----------------|
| | Push-pull plug | Break-away plug |
| | PEI | PSU |
| 1.0 | 200 | 500 |
| 2.0 | | 200 |
| 3.5 ¹ | | — |

For information about autoclaving of receptacles, please contact us.

¹ Max. 2000 mating cycles if autoclaving is required.

Please also find further autoclavable solutions with our [ODU MINI-SNAP® Series L/K/B](#) and [ODU AMC® High-Density matt chromium series](#) of connectors.

TECHNICAL TERMS



AMBIENT TEMPERATURE

Temperature of the air or other medium in which a connector or a corresponding cable assembly is intended to be used.

AUTOCLAVABILITY

See page [121](#).

AWG

American Wire Gauge – see page [115](#).

BASE CURVE

See page [116](#).

CHEMICAL RESISTANCE

Chemical resistance is the ability of a material to protect itself against chemical attack or solvent reaction. In contrast to corrosion, there is no material removal, which is particularly typical for plastics and elastomers.

Adhesives, cleaning agents or other chemicals are often used on our products within the scope of general deployment and further handling. Contact with unsuitable chemicals may have an adverse effect on the mechanical and electrical properties of the insulation and housing materials. The connector specifications may no longer be sustainable. Please observe our handling suggestions and technical instructions as given in this catalog or corresponding assembly instructions.

CLEARANCE DISTANCE

The shortest distance by air between two conductive parts (according to IEC 60664-1:2020 (VDE 0110-1:2022-07)).

CODING (MECHANICAL)

Geometry detail that prevents interchangeability of otherwise identical connectors. This is useful when two or more identical connectors are attached to the same device.

CONNECTOR WITH BREAKING CAPACITY (CBC)

Connector that may be mated or unmated during intended use, live or under load (according to IEC 61984:2008 (VDE 0627:2009-11)).

CONNECTOR WITHOUT BREAKING CAPACITY (COC)

Connector which is not deemed to be engaged or disengaged in normal use when live under load (according to IEC 61984:2008 (VDE 0627:2009-11)).

CONNECTORS

An element which enables electrical conductors to be connected and is intended to create and/or separate connections with a suitable counterpart (according to IEC 61984:2008 (VDE 0627:2009-11)). If not otherwise specified, these are connectors without breaking capacity (COC).

CONTACT RESISTANCE

Total resistance value measured from terminal to terminal. In this case, the resistance is significantly lower than the contact resistance. The specifications are average values.

CORES

Electrical conductor, solid wire or multi-wire strand, with insulation as well as any conductive layers. Cables or leads may have one or more cores.

CREEPAGE DISTANCE

The shortest distance between two conductive parts along the surface of a solid insulation material IEC 60664-1:2020 (VDE 0110-1:2022-07). This factors in all elevations and recesses in the insulator, as long as defined minimum dimensions are on hand.

CRIMP BARREL

A terminal sleeve which can accommodate one or more conductors and be crimped by a crimping tool.

CRIMP CONNECTION (CRIMP TERMINATION)

The permanent, non-detachable and solder-free mounting of a contact to a conductor via deforming or shaping under pressure to make a good electrical and mechanical connection. Executed with crimping tool, press or automatic crimping machine (see page [104 ff](#)).

CRIMPING AREA

The specified area of the crimp barrel in which the crimp termination is executed by means of deforming or shaping the barrel under pressure around the conductor.

DELIVERY FORM

Connectors can be delivered in assembled form or as individual parts.

DERATING CURVE

The corrected current-carrying capacity curve, derived from the determined base curve ($0.8 \times$ measured current). It factors in

TECHNICAL TERMS



manufacturing tolerances as well as uncertainties in temperature measurement and measurement arrangement, See derating measurement method.

DERATING MEASUREMENT METHOD IN ACCORDANCE WITH IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003-01)

See page [116](#).

INSERTION AND WITHDRAWAL FORCE

The force required to fully insert or withdraw pluggable elements without the influence of a coupling or locking device.

INSULATOR

Part of a connector that separates conductive parts with different potential, usually identical to the contact carrier

MATING CYCLES

A mating cycle consists of one insertion and withdrawal action of both connector parts with each other. The given values are only valid under the following conditions: clean environment, adequate radial alignment, flawless counter contact pins.

MAX. CONTINUOUS CURRENT

The metrologically determined amperage at room temperature (approx. +20° C) which increases the contact temperature to the limit temperature. The values specified in the catalog apply to either individual contacts or completely assembled inserts / modules, as indicated. Refer to page [116](#) for the derating curve, if a different ambient temperature is valid

NOMINAL CURRENT

see Rated Current

NOMINAL SINGLE CONTACT CURRENT LOAD

The current-carrying capacity which each individual contact can be loaded with on its own (see page [116](#))

NOMINAL VOLTAGE

The nominal voltage of the power source for which the connector is being used. The nominal voltage may not be higher than the rated voltage of the connector.

OPERATING TEMPERATURE

Permissible temperature range between the uppermost and lowermost limits. This includes contact heating through current-carrying capacity.

OPERATING VOLTAGE

The operating voltage is the voltage supply at the device. The operating voltage may not be higher than the rated voltage of the connector.

OVERVOLTAGE CATEGORY

Numerical defining a transient overvoltage condition as defined in Table F.1 in IEC 60664-1:2020 (VDE 0110-1:2022-07)). This table provides the value of the rated impulse voltage that must be met.

PCB TERMINATION

A conductive connection between the PCB and an element in through-hole assembly, THT (through-hole technology).

POLLUTION DEGREE 1

No or only dry, non-conductive pollution is present. The pollution has no influence. For example, this is common for computer systems and measuring instruments in clean, dry, or air-conditioned rooms.

POLLUTION DEGREE 2

(= standard, if no specific pollution degree is indicated)

Only non-conductive pollution is present. However, temporary conductivity due to condensation must be anticipated. For example, this is common for devices in laboratories, residential, sales, and other business areas.

POLLUTION DEGREE 3

Conductive pollution is present or dry, non-conductive pollution that will become conductive because condensation is expected. For example, this is common for devices in industrial, commercial, and agricultural operations, unheated storage areas, and workshops.

PRINTED CIRCUIT BOARD (PCB)

A PCB is a carrier for electronic components. It serves the purposes of mechanical mounting and electrical connection.

RATED IMPULSE VOLTAGE

The specified rated impulse voltage confirms the dielectric withstand voltage and thereby the withstand capability of its insulation against transient overvoltages according to the standard by applying the test voltage according to Table F.6 in IEC 60664-1:2020 (VDE 0110-1:2022-07)) over a defined time range.

TECHNICAL TERMS



RATED CURRENT (NOMINAL CURRENT)

See page [116](#).

RATED VOLTAGE

The rated voltage which the manufacturer specifies for a connector and which the operating and performance features relate to.

REDUCTION FACTOR

Based on VDE 0298-4:2013-06, connectors and cables with more than 5 contacts have a higher heating rate compared to individual contacts. For this reason, the aforementioned standard is calculated with a reduction.

SOLDER CONNECTION (SOLDER TERMINATION)

Termination technology in which a molten additional metal (solder) with a lower melting point than the base materials to be connected is used to attach two metallic materials to one another.

STRANDED WIRE

The stranded wire is an electrical conductor consisting of thin individual wires and is therefore easy to bend.

SURGE VOLTAGE

The generic term for high impulse test voltages used to test power supply equipment.

TERMINATION CROSS-SECTION

The specified cross-sections correspond to a "fine-wire" conductor structure (7/19 wire) according to AWG (ASTM B258-14) or to a "fine-wire" conductor structure pursuant to IEC 60228:2004 (VDE 0295:2005-09; Class 5), borderline conductor structures require a separate review.

TERMINATION TECHNOLOGIES

Methods for connecting the leads to the electro-mechanical element, such as solder-free connections pursuant to IEC 60352 (DIN EN 60352): crimp, screw connection etc. or soldering connection (see page [114](#)).

TEST VOLTAGE

The test voltage which a connector or a corresponding cable assembly can withstand under defined conditions without dielectric breakdown or flashover.

TIGHTNESS IEC 60529:1989 (VDE 0470-1:2014-09)

See protection types on page [120](#).

TOTAL RESISTANCE

Total resistance value measured from terminal to terminal (e.g. without crimp resistance).
The specifications are average values.

WIRE

Solid conductor

WORKING VOLTAGE

According to IEC 60664-1:2020 (VDE 0110-1:2022-07) standard „Highest r.m.s. value of the a.c. or d.c. voltage across any particular insulation which can occur when the equipment is supplied at rated voltage.“



GENERAL NOTE

The connectors and cable assemblies listed in this catalog are generally designed as connectors without breaking capacity unless otherwise stated. The rated voltage specification given on the respective data sheet must be respected. Suitable precautionary measures must be taken to ensure that people do not come into contact with live conductors during installation and operation. All entries in this catalog were thoroughly reviewed before printing. ODU reserves the right to make changes based on the current status of knowledge without prior notice and without being obliged to provide replacement deliveries or refinements of older designs.



Printed on certified
recycled paper.

All dimensions are in mm.
Some figures are for illustrative purposes only. Subject to change
without notice. Errors and omissions excepted. We reserve the right to
change our products and their technical specifications at any time in
the interest of technical improvement. This publication supersedes all
prior publications.

ODU MEDI-SNAP® / C / 1225 / EN

This publication is also available as a PDF file that can be downloaded
from www.odu-connectors.com