


CONNECTOR SOLUTIONS


Military Applications



www.odu-connectors.com

ODU CONNECTOR APPLICABILITY

EXTREME ENVIRONMENTAL CONDITIONS

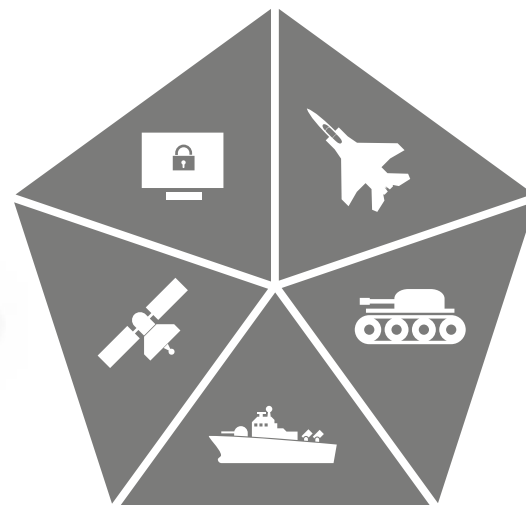

The contact arrangement of an ODU data transmission connector differs from a standard data transmission connector due to the robust ODU specific design. However, the ODU design meets the electrical specifications that are derived from the respective standard data transmission protocol.

SOLDIER COMMUNICATION SYSTEMS

- 70 % weight and size reduction
- Up to IP6K9K
- High signal integrity 360° shielding
- NATO STANAG 4695, Nett Warrior and GOSSRA
- Environmental tested MIL-STD-810
- High-speed data transfer including:
USB® 3.2 Gen 1×1, 10 Gbit/s Ethernet and HDMI®




UNMANNED SYSTEMS: UAV / UGV / UAS

CUSTOMIZED CONNECTIVITY

- Rugged and reliable optical connectivity solutions
- Various locking systems
- Lightweight & space saving design
- High vibration and shock resistant
- Video and signal transmission
- Interference-free fiber optic transmission


Get your
connector via
ODU Express
15 day
lead-time!

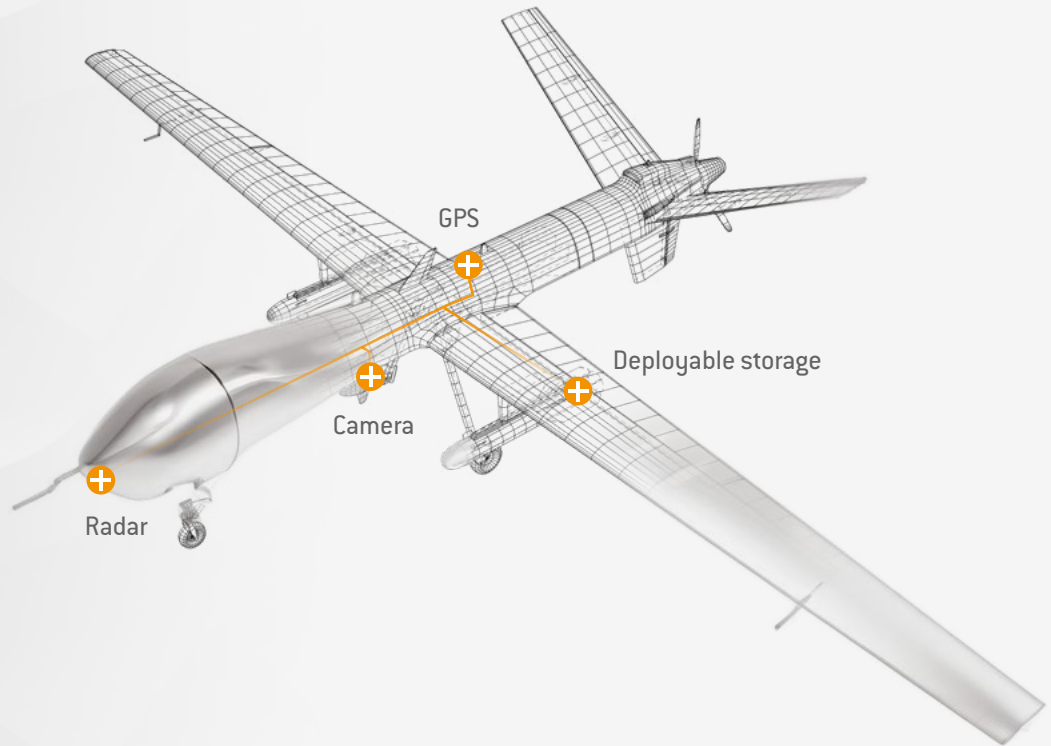

MILITARY VEHICLES

ODU
Product Finder
Configure your
connector
online!

- Miniaturized 38999 type
- Shock and vibration resistant
- Ergonomic shape and rapid mate/demate capable
- 3 on 1 locking option
- MIL-STD-1472 and MIL-STD-810
- Field assembly capabilities
- IP6K9K with submersibility (20 m / up to 2 hrs)
- REACH & RoHS compliant
- Cable assembly integrated solutions

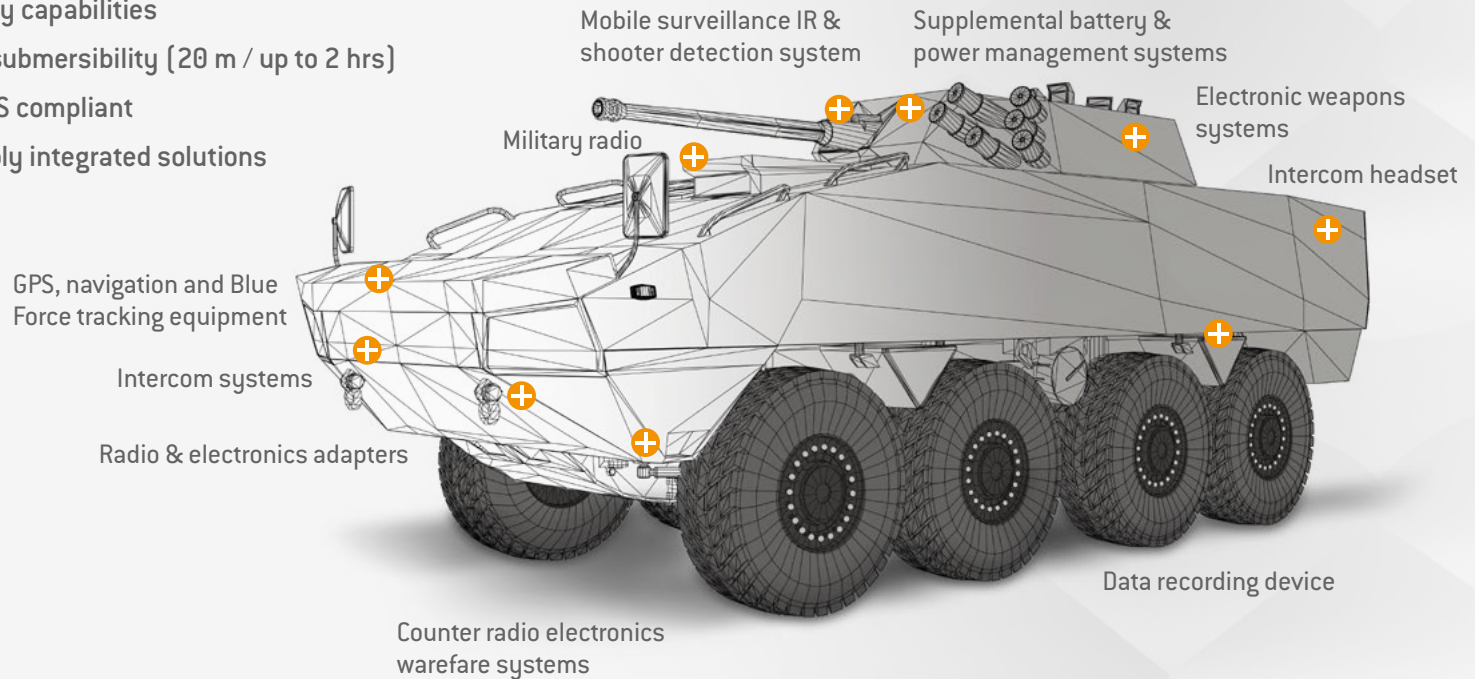


C4ISR SYSTEMS

Advanced C4ISR technology has proven as a critical requirement and key feature in today's digitally networked forces.

ODU Connector Solutions support the link between units, optimizing their situational awareness and knowledge of the adversary and environment – all by shortening the time between sensing and responding and providing the critical connections needed.

- Secure data transmission through seamless EMI protection
- Save space with hybrid interfaces
- Superior SWaP metrics
- MIL-compliant quality

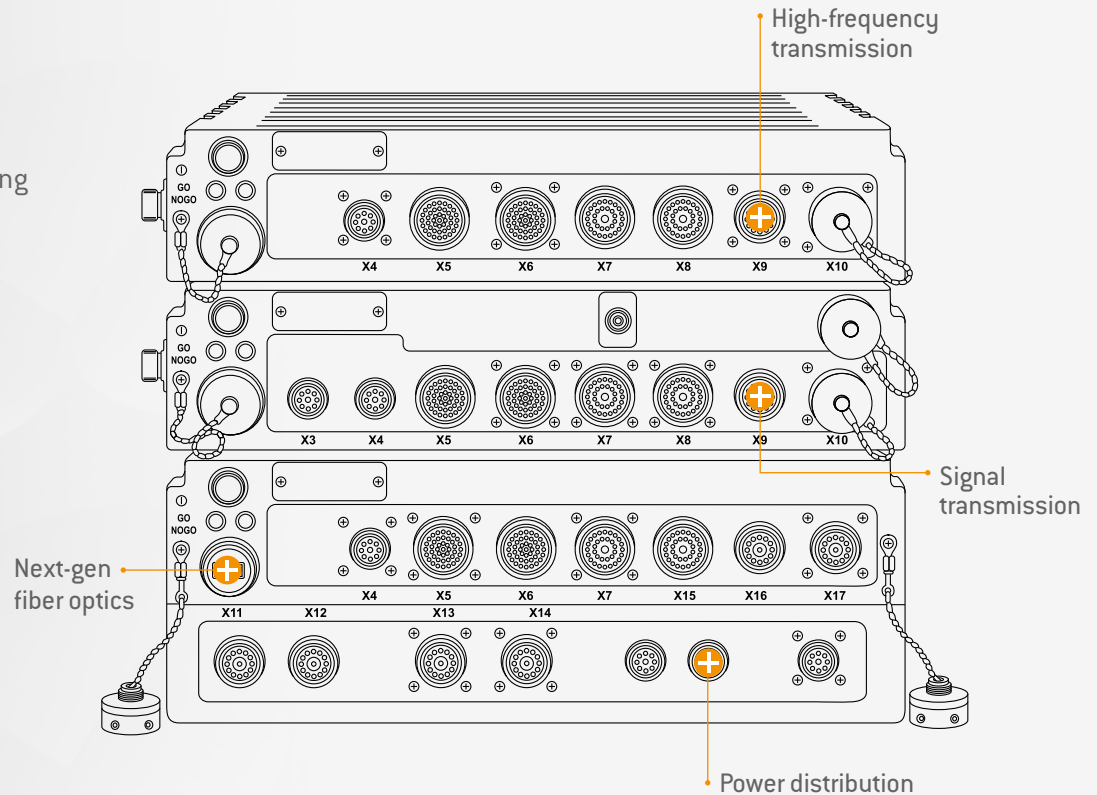

ODU MILITARY CONNECTORS

	Keying	Sizes	No. of possible mechanical keyings	Diameter plug (mm)	Max. cable diameter (mm)	Max. no. of contacts	Solder	Crimp	Print
ODU AMC® High-Density Break-Away <ul style="list-style-type: none">70 % weight and size reductionCable assembly solutionsUSB® 3.2 Gen 1x1 + USB® 2.0 + HDMI® + Ethernet 	Pin and groove	00	4	9.8	5.0	7	●	—	●
		0		12.8	7.0	16			
		1		14.8	8.5	27			
ODU AMC® High-Density Screw-Lock <ul style="list-style-type: none">High vibration resistanceHigh-speed data transferHigh contact density: 2–27 contacts / 3 sizes 	Pin and groove	00	4	9.8	5.0	7	●	—	●
		0		12.8	7.0	16			
		1		15.2	8.0	27			
ODU AMC® Threaded <ul style="list-style-type: none">High shock and vibration resistanceHigh-speed data transferInterference-free data transmission360 ° shielding 	Pin and groove	1.5	2	17.5	8.5	19	●	—	●
		3		29.4	12.8	26			
ODU AMC® Series T <ul style="list-style-type: none">Miniturized 38999 connectorThree locking types to 1 receptacleHigh vibration resistanceSuitable for MIL 38999 backshells 	Pin and groove	9	4	18.4	7.6	20	●	●	●
				18.5					
				21					
		12		24.2	14.6	22			
				24.9					
				26					

Buy online



	IP Class in mated condition	IP Class in unmated condition	Shell material	RoHS compliant	Operating temperature range	Advanced plating technologies for corrosion resistance	Coax transmission	Rapid cable assembly manufacturing	USB® 3.2 Gen 1x1	USB® 2.0	HDMI®	Ethernet CAT 5 & 10 GBit Ethernet	DisplayPort®
ODU AMC® High-Density Break-Away	Up to IP6K9K	IP68	Brass	●	–51 °C (–60 °F) to +125 °C (+257 °F)	●	●	●	●	●	●	●	–
ODU AMC® High-Density Screw-Lock	Up to IP6K9K	IP68	Brass	●	–51 °C (–60 °F) to +125 °C (+257 °F)	●	●	●	●	●	●	●	–
ODU AMC® Threaded	Up to IP6K8	IP68	Aluminum	●	–51 °C (–60 °F) to +125 °C (+257 °F)	●	–	●	–	–	–	●	–
ODU AMC® Series T	Up to IP6K9K	IP68	Aluminum	●	–65 °C (–85 °F) to +175 °C (+347 °F)	●	–	Backshell version & standard cable assemblies	–	–	●	●	●

ODU MILITARY CONNECTORS

		Keying	Sizes	No. of possible mechanical keyings	Diameter plug [mm]	Max. cable diameter [mm]	Max. no. of contacts	Solder	Crimp	Print
ODU AMC® Push-Pull <ul style="list-style-type: none">> 5,000 mating cyclesHigh-speed data technologyQuick and easy mating and locking 	Pin and groove	4	0	14.0	5.5	10	●	—	●	
			1	15.9	6.5	16				
			1.5	16.5	8.0	19				
			2	19.6	10.0	26				
			3	23.9	11.5	37				
			4.5	33.0	17.5	55				
ODU AMC® Break-Away <ul style="list-style-type: none">> 5,000 mating cyclesHigh-speed data technologyQuick and easy demating and locking 	Pin and groove	4	0	11.9	5.5	10	●	—	●	
			1	13.9	6.5	16				
			1.5	15.9	8.0	19				
			2	17.6	10.0	26				
			3	21.9	11.5	37				
ODU AMC® NP <ul style="list-style-type: none">Current rating up to 5 A per contact> 2,000 mating cyclesBreak-away function 	Pin and groove	6	11	12.4	6.65	7	●	—	●	
ODU AMC® Easy-Clean <ul style="list-style-type: none">Fast and easy cleaningBreak-away function> 5,000 mating cyclesContact inserts with pogo pins 	Pin and groove	4	0	11.9	5.5	7	●	—	●	
			1	13.9	6.5	16				
			1.5	15.9	8.0	19				

	IP class in mated condition	IP class in unmated condition	Shell material	RoHS compliant	Operating temperature range	Advanced plating technologies for corrosion resistance	Coax transmission	Rapid cable assembly manufacturing	USB® 3.2 Gen 1x1	USB® 2.0	HDMI®	Ethernet CAT 5 & 10 GBit Ethernet	DisplayPort®
ODU AMC® Push-Pull	Up to IP6K9K	IP68	Aluminum	●	−51 °C (−60 °F) to +125 °C (+257 °F)	●	●	●	●	●	●	●	●
ODU AMC® Break-Away	Up to IP6K9K	IP68	Aluminum	●	−51 °C (−60 °F) to +125 °C (+257 °F)	●	●	●	●	●	●	●	●
ODU AMC® NP	IP68 20 meters for 2 hours	IP68 20 meters for 2 hours	Aluminum	●	−18 °C (−0.4 °F) to +71 °C (+159.8 °F)	●	●	●	—	●	—	—	—
ODU AMC® Easy-Clean	Up to IP6K9K	IP6K8	Aluminum	●	−51 °C (−60 °F) to +125 °C (+257 °F)	●	●	●	—	—	—	—	—

ODU FIBER OPTIC

EXPANDED BEAM PERFORMANCE

is an advanced fiber optic solution available in a variety of connector series to meet the full range of application requirements.

- + Minimum maintenance necessary
- + Durable contact technology
- + Excellent optical performance under every condition



CONTACT TECHNOLOGY (EBP)

- 50,000 mating cycles
- No cleaning, only if necessary
- -65 °C to +105 °C
- Insertion loss*
 - SM: < 0.35 dB [typical] / < 0.7 dB [max.]
 - MM: < 0.15 dB [typical] / < 0.3 dB [max.]
- Return loss*
 - SM: > 60 dB [typical] / ≥ 55 dB [min.]
 - MM: > 45 dB [typical] / ≥ 35 dB [min.]

* Values are defined per contact side

	ODU MEDI-SNAP®	ODU AMC® Series T	ODU MINI-SNAP® Series K	ODU-MAC® White-Line / Silver-Line
Special feature	Light weight / non-magnetic	Ruggedized	Smallest footprint (OD 16.2 mm)	Automatic docking / Manual mating / Hybrid / Non-magnetic
Mating cycles	2,000	5,000	5,000	50,000
IP rating	IP64	IP6K9K	IP68	IP50 to IP67
Temperature	-40 °C to +85 °C DIN EN IEC 61300-2-47	-40 °C to +85 °C TIA/EIA-455-4C	-40 °C to +85 °C DIN EN IEC 61300-2-47	-40 °C to +85 °C DIN EN IEC 61300-2-47
Locking system	Push-Pull	Push-Pull / Threaded	Push-Pull	Spindle / Transverse / Lever
Housing material	Plastic	Metal	Metal	Metal / Plastic

SYSTEM SOLUTIONS

Even under environmental stress, the Expanded Beam Technology maintains high performance for up to 100,000 mating cycles while being easy to clean.

THE ODU FIBER OPTIC PORTFOLIO

also includes reliable physical contact and cost effective polymer optical-fiber system solutions, all available for circular and modular connectors.

Modular
fiber optic
solutions



- + GOF (multimode / singlemode) and POF system solutions
- + Fiber-only and hybrid systems
- + High number of mating cycles
- + Available as fully assembled solutions

MODULAR / RECTANGULAR TECHNOLOGY

Customizable hybrid interconnectivity solution

- + Rapid turnaround for low volumes
- + Tailor-made solution for your application including cable assembly
- + Fail-safe and reliable



ODU
Product Finder
Configure your
connector
online!

ODU-MAC® /White-Line/

- High vibration resistance & manual mating
- > 100,000 mating cycles
- Self-cleaning contacts
- > 30 high-speed data inserts
- Low contact resistance
- Various locking options (e. g., snap-in, spindle, lever)
- EMC shielded housings on request



ODU-MAC® /Blue-Line/

- Easy one-handed operation
- Up to 70 signal contacts and power, coax, air, fluid, data rates
- > 5,000 mating cycles
- IP67
- Up to 6 mechanical keying options

ODU-MAC® /Silver-Line/

- Advanced docking
- High vibration resistance
- > 100,000 mating cycles
- Self-cleaning contacts
- > 30 different high-speed data inserts
- 7 docking frame options
- Suitable for blind mating

ELECTRICAL CONTACT TECHNOLOGY



ODU LAMTAC®

ODU SPRINGTAC®

Primary attribute	High temperature & current	High mating cycles
Contact technology	Lamella technology	Springwire technology
Contacting	19 lamella louvres with 2 contact points each (size Ø 6 mm)	44 wire springs (size Ø 6 mm)
Nominal current	115 A (size Ø 6 mm)	110 A (size Ø 6 mm)
Angular misalignment	± 1°	± 1°
Mating cycles	> 10,000	> 100,000
Temperature range standard version	–40 °C [–40 °F] to +150 °C [+302 °F]	–40 °C [–40 °F] to +125 °C [+257 °F]
Contact size*	from Ø 1.5 mm	from Ø 0.76 mm
Standard plating	Ag / Au	Ag / Au
Crimp termination	•	•
Screw termination	•	•
For busbars (through-hole design)	•	•

- Versatile contact technologies
- Outstanding reliability and durability with up to 1 million mating cycles
- Current-carrying capacity of up to 2,400 amperes and more
- Robust and universal contact systems
- Stamping technology for customer-specific high volume solutions
- High vibration and shock resistance
- Low, stable contact resistance

* Other sizes on request

CABLE ASSEMBLY SOLUTIONS



ODU TESTING & QUALITY

- In-process checking
- Data rate testing
- 100 % final inspection
- EMC compatible assembly
- Potting and environmental sealing
- Production possible in cleanroom in accordance with EN ISO 14644-1

All dimensions are in mm.
Some figures are for illustrative purposes only. Subject to change without notice. Errors and omissions excepted. We reserve the right to change our products and their technical specifications at any time in the interest of technical improvement. This publication supersedes all prior publications.

ODU MILITARY APPLICATIONS / B / 06/26 / EN

This publication is also available as a PDF file that can be downloaded from www.odu-connectors.com